




ICC Evaluation Service Overview

2024

What is ICC-ES?

- International Code Council subsidiary
- Evaluates products using codes and standards for the built environment
- Accredited by:
 - ANSI National Accreditation Board (ANAB) to ISO/IEC 17065
 - Standards Council of Canada (SCC)
 - American Association for Laboratory Accreditation (A2LA)
 - entidad mexicana de acreditación A.C. (ema) to certify plumbing and mechanical products to Official Mexican Standards (NOMs) and Mexican Standards (NMXs)
 - Joint Accreditation System of Australia and New Zealand (JASANZ) for plumbing products under the WaterMark scheme
- Expert in developing and interpreting ICC-ES Acceptance Criteria (ACs) for innovative products
- Technical staff are licensed engineers in Civil, Structural, Mechanical and other fields with decades of experience



Standards Council of Canada
Conseil canadien des normes



ICC-ES At a Glance

90 Years

ICC-ES celebrates 90 years of excellence in product evaluation

59 Countries

ICC-ES has issued reports in over 59 countries

30,000 Hours

ICC-ES conducts 30,000 hours of inspections annually

5,000 Codes

ICC-ES has completed product evaluations to over 5,000 codes and standards worldwide





History

- ANSI Z34.1-1993

With reference to: ISO and ISO/IEC Guides 2, 7, 23, 25, 27, 28, 39, 40, 53, and 56, and 60 ISO 9001, 9002, and 9003

- ISO/IEC Guide 40
- ISO/IEC Guide 65-1996
- ISO/IEC 17065-2012



Other Relevant Documents

- ISO/IEC 17007
- ISO/IEC 17020
- ISO/IEC 17025



ICC-ES Programs

- Traditional Building Product Evaluation Program (ESR): Allowing innovation through the issuance of Evaluation Reports (ESRs) as evidence that building products, components, methods, and materials meet code requirements
- Product Listing to Standards Referenced in the Codes (ESL)
- Solar Thermal Ratings and Listings (SRCC)
- Small Wind Ratings (SWCC)
- In-House Testing



ICC-ES Programs (cont.)

- Plumbing, Mechanical and Gas (PMG) Listings: Demonstrating conformance to the standards referenced in the I-Codes® as well as the UPC, UMC and National Plumbing Code of Canada, Kitchen Cabinet KCMA A161.1
- Environmental Programs: Provide manufacturers with independent and comprehensive verification and/or certification that their products meet specific sustainability (green) targets (e.g., WaterSense, Energy STAR, formaldehyde emissions)
- Marketing Claim Verification
- Food Safety Certification (SQFI)



Global Regions

- MENA (Middle East/North Africa):
Dubai Municipality, The Saudi Building Code National Committee (SBCNC), UAE Civil Defense Certificate of Compliance (CoC)
- Oceania:
WaterMark-Lead Free, ES Mark scheme
- Canada, Mexico:
Standards Council of Canada (SCC), Official Mexican Standards (NOMs) and Mexican Standards (NMXs)



ICC-ES Testing

- ICC-ES provides testing and inspection services including fire testing, structural, floor assembly, and water resistance testing as well as offsite construction services.
- ISO/IEC 17020 and 17025 accredited.




What is Product Certification?


- Review of products against a standard, a criteria, or a code to ensure continuous compliance of products
- Certification steps include review of products, periodic inspection of plants (by an ISO/IEC 17020 accredited inspection agency), periodic review of submitted information against new or revised standards
- Inspection of the manufacturing plants ensures that the product that was once deemed as compliant continues to comply



Product Evaluation Process

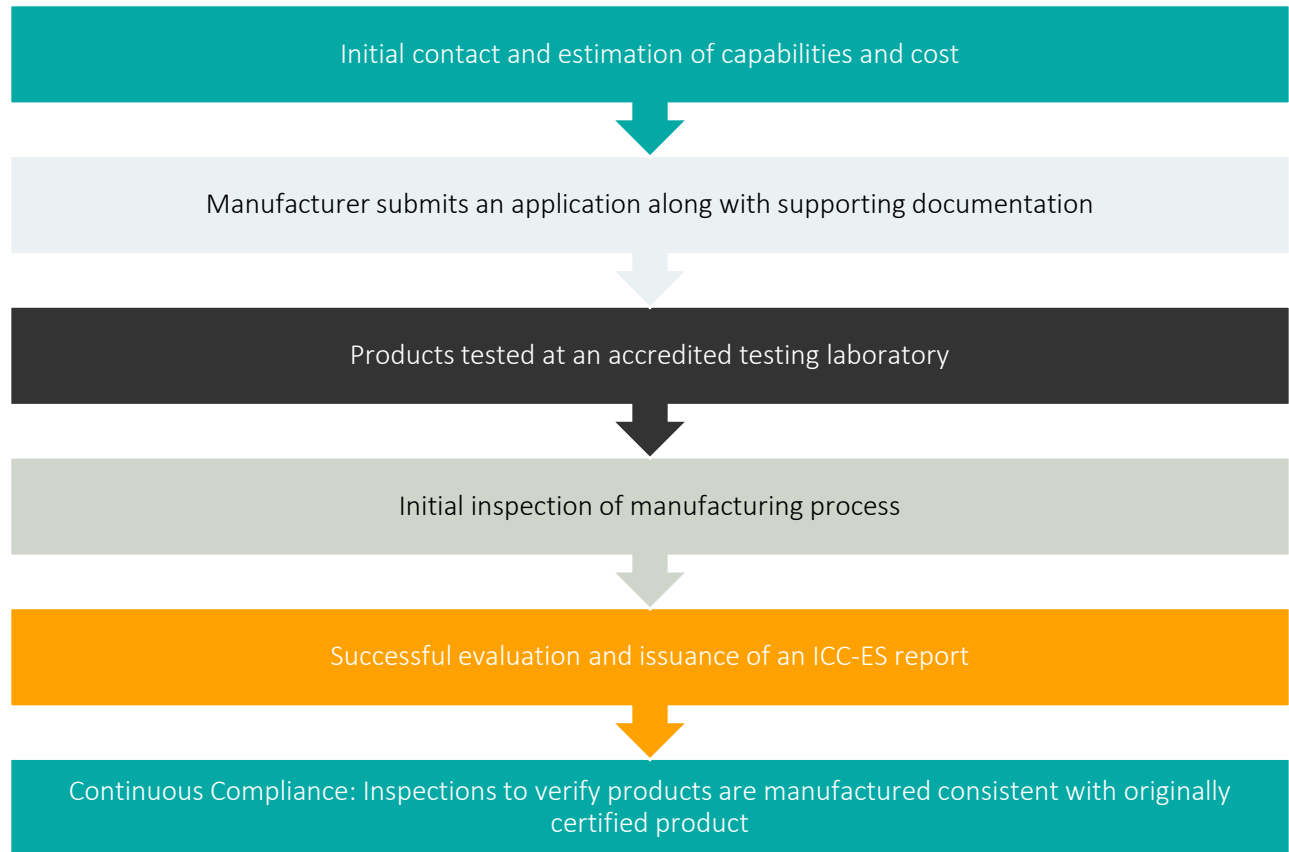

Product Evaluation Process

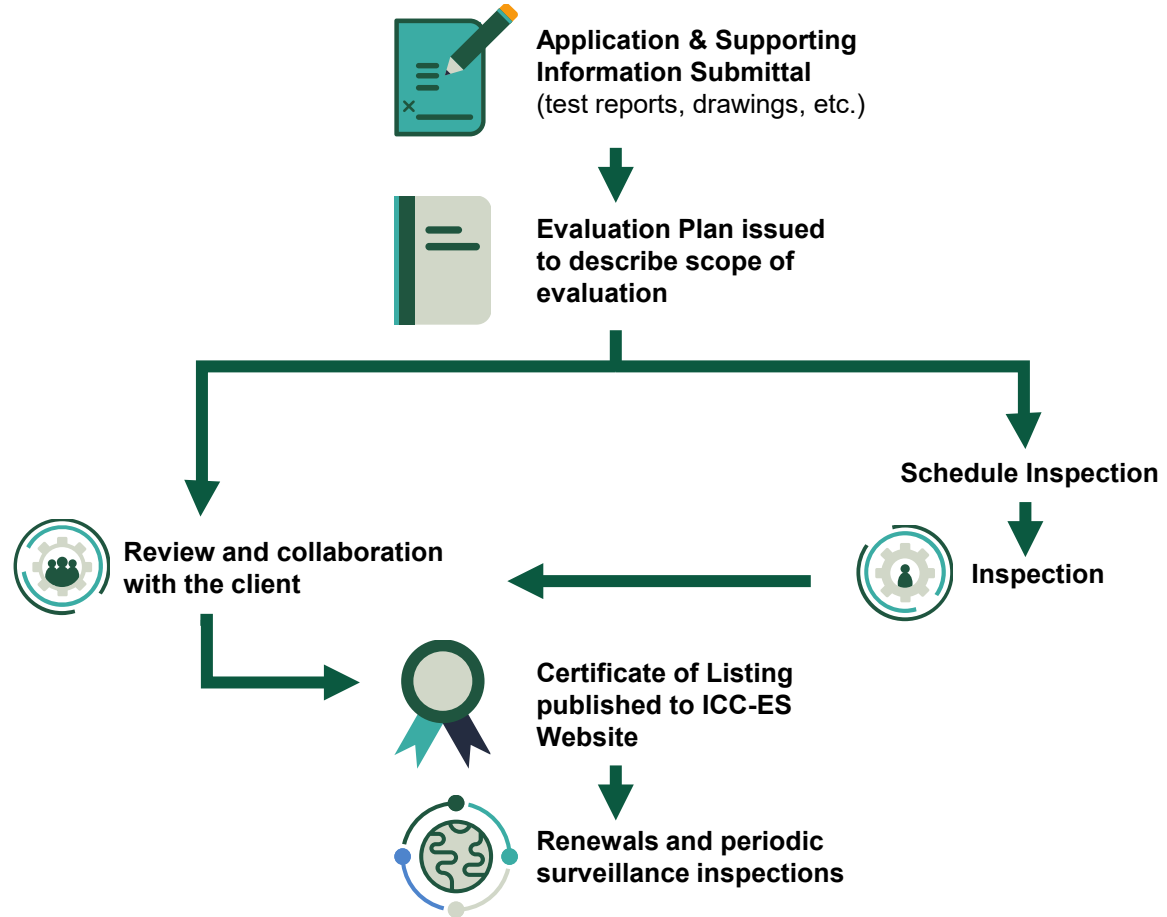


Benefits of Product Certification

- Consumers have been demanding safer products (worldwide)
- Characteristics such as quality, safety, economy, reliability, compatibility, efficiency and effectiveness can be examined through conformity assessment
- It assures that products deliver on their promise
- Users can be assured that the products are safe for usage and can perform as expected




ICC-ES Marks of Conformity

- Inspectors should look for ICC-ES marks prior to approving installation where the code or other criteria requires conformity to a standard.
- The ICC-ES mark means that the product has undergone a rigorous evaluation
- ICC-ES has a new, universal mark of conformity!

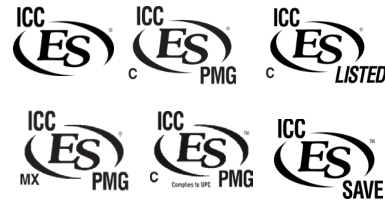

What's in an ICC-ES Evaluation Report

ICC-ES Evaluation Reports from ICC Evaluation Service® are the most preferred resource used by code officials to verify that new and innovative building products comply with code requirements. ICC-ES Evaluation Reports provide information about what code requirements or acceptance criteria were used to evaluate the product, how the product should be installed to meet the requirements, how to identify the product, and much more. ICC-ES Evaluation Reports are divided into twelve major areas. Digitized reports are interactive and contain internal and external links.




ICC-ES Evaluation Report

ESR-0000



Issued March 2023
Subject to renewal March 2024

This report also contains:
- CBC Supplement
- LABC Supplement



ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.

Copyright © 2024 ICC Evaluation Service, LLC. All rights reserved.

DIVISION: 03 00 00— CONCRETE Section: 03 16 00— Concrete Anchors DIVISION: 05 00 00— METALS Section: 05 05 19—Post- Installed Concrete Anchors	REPORT HOLDER: SAMPLE, INC. 	EVALUATION SUBJECT: SAMPLE SCREW ANCHORS FOR USE IN CRACKED AND UNCRAKED CONCRETE	
--	--	---	---

1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2021, 2018, 2015 [International Building Code® \(IBC\)](#)
- 2021, 2018, 2015 [International Residential Code® \(IRC\)](#)

For evaluation for compliance with codes adopted by the [Los Angeles Department of Building and Safety \(LABDS\)](#), see [ESR-0000 LABC and LARC Supplement](#).

Property evaluated:
Structural

2.0 USES

The Sample screw anchors are used as anchorage in cracked and uncracked normal-weight and lightweight concrete having a specified strength, f_c , of 2,500 psi to 8,500 psi (17.2 MPa to 58.6 MPa); to resist static, wind and seismic (Seismic Design Categories A through F) tension and shear loads.

The Sample screw anchors are an alternative to anchors described in Section 1901.3 of the 2021, 2018 and 2015 IBC. The anchors may also be used where an engineered design is submitted in accordance with Section R301.1.3 of the IRC.


3.0 DESCRIPTION

3.1 Sample screw anchors

The Sample screw anchors are comprised of a body with hex washer head. The anchor is manufactured from carbon steel and is heat-treated. The anchoring system is available in a variety of lengths with nominal diameters of $\frac{3}{16}$ -inch and $\frac{1}{2}$ -inch. The Sample screw anchor is illustrated in [Figure 1](#).

3.2 Concrete:

Normal-weight and lightweight concrete must conform to Sections 1903 and 1905 of the IBC.



Page 1 of 10

What's in an ICC-ES Evaluation Report

1. **QR Code**- Easy access to digital report online
2. **CSI Division Number**- ICC-ES Evaluation Reports, and the building products represented in them, are organized according to the Construction Specifications Institute's (CSI) Masterformat system.
3. **Report Holder**- The name, address, and logo of the company or organization that has applied for the ICC-ES Evaluation Report.
4. **Evaluation Subject**- The specific product(s) covered by the report.
5. **Evaluation Scope**- The code(s) that were used to evaluate the product.
6. **Properties Evaluated**- A brief description of the properties the product was evaluated against such as fire resistance and wind resistance. This section also shows if the product can be used for structural purposes.
7. **Uses**- Identifies the scope of the ICC-ES Evaluation Report and relates the product evaluated to code provisions.
8. **Description**- Provides a general description of the product and its features, such as length, thickness, etc.

ES ICC EVALUATION SERVICE™

ICC-ES Evaluation Report



ESR-0000

Issued March 2023

This report also contains:
- CBC Supplement
- LABC Supplement

Subject to renewal March 2024

ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.
Copyright © 2024 ICC Evaluation Service, LLC. All rights reserved.

2 DIVISION: 03 00 00— CONCRETE Section: 03 16 00— Concrete Anchors DIVISION: 05 00 00— METALS Section: 05 05 19—Post- Installed Concrete Anchors	REPORT HOLDER 3 SAMPLE, INC. 	EVALUATION SUBJECT: SAMPLE SCREW ANCHORS FOR USE IN CRACKED AND UNCRAKED CONCRETE 4	 1
---	--	--	--

5 1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2021, 2018, 2015 [International Building Code® \(IBC\)](#)
- 2021, 2018, 2015 [International Residential Code® \(IRC\)](#)

For evaluation for compliance with codes adopted by the [Los Angeles Department of Building and Safety \(LADBS\)](#), see [ESR-0000 LABC and LARC Supplement](#).

6 Property evaluated:
Structural

7 2.0 USES

The Sample screw anchors are used as anchorage in cracked and uncracked normal-weight and lightweight concrete having a specified strength, f_c of 2,500 psi to 8,500 psi (17.2 MPa to 58.6 MPa); to resist static, wind and seismic (Seismic Design Categories A through F) tension and shear loads.

The Sample screw anchors are an alternative to anchors described in Section 1901.3 of the 2021, 2018 and 2015 IBC. The anchors may also be used where an engineered design is submitted in accordance with Section R301.1.3 of the IRC.


8 3.0 DESCRIPTION

3.1 Sample screw anchors

The Sample screw anchors are comprised of a body with hex washer head. The anchor is manufactured from carbon steel and is heat-treated. The anchoring system is available in a variety of lengths with nominal diameters of $3/8$ -inch and $1/2$ -inch. The Sample screw anchor is illustrated in [Figure 1](#).


3.2 Concrete:

Normal-weight and lightweight concrete must conform to Sections 1903 and 1905 of the IBC.


Page 1 of 10

What's in an ICC-ES Evaluation Report

- Design and Installation-** Identifies general and often specific requirements to help the inspector ensure the product is installed properly according to the code requirements or acceptance criteria.
- Conditions of Use-** Statement that the product, as described in the ICC-ES Evaluation Report, complies with or is a suitable alternative to the requirements of the applicable code and a list of conditions under which the report is issued
- Evidence Submitted-** Data (i.e. test reports, calculations, installation instructions) that was used in evaluating the product.
- Identification-** Information that can be used to identify the product, including the manufacturer's name, product code, ICC-ES Evaluation Report number, etc.

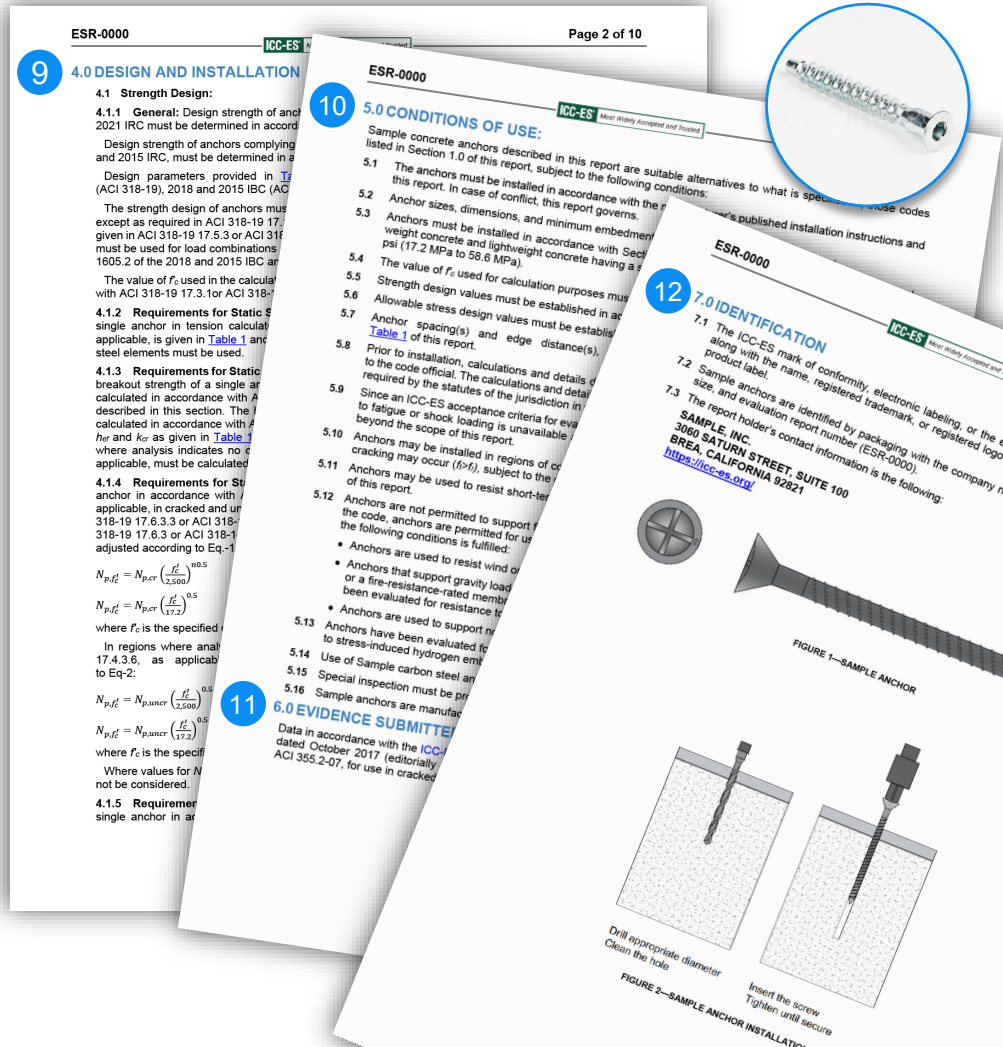

Basis for Evaluation Report

Code Provisions

- This is the basis for evaluation

Acceptance Criteria

- For innovative products not specifically referenced in the code, existing or new Acceptance Criteria developed by ICC-ES are used as the basis for evaluation



ICC-ES Evaluation Report

ESR-0000

Issued March 2023

This report also contains:

- CBC Supplement
- LABC Supplement

Subject to renewal March 2024



ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.

Copyright © 2024 ICC Evaluation Service, LLC. All rights reserved.

DIVISION: 03 00 00— CONCRETE Section: 03 16 00— Concrete Anchors DIVISION: 05 00 00— METALS Section: 05 05 19—Post- Installed Concrete Anchors	REPORT HOLDER: SAMPLE, INC. 	EVALUATION SUBJECT: SAMPLE SCREW ANCHORS FOR USE IN CRACKED AND UNCRAKED CONCRETE	
--	---	---	--

1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2021, 2018, 2015 [International Building Code® \(IBC\)](#)
- 2021, 2018, 2015 [International Residential Code® \(IRC\)](#)

For evaluation for compliance with codes adopted by the [Los Angeles Department of Building and Safety \(LADBS\)](#), see [ESR-0000 LABC and LARC Supplement](#).

Property evaluated:

Structural

2.0 USES

The Sample screw anchors are used as anchorage in cracked and uncracked normal-weight and lightweight concrete having a specified strength, f_c , of 2,500 psi to 8,500 psi (17.2 MPa to 58.6 MPa); to resist static, wind and seismic (Seismic Design Categories A through F) tension and shear loads.

The Sample screw anchors are an alternative to anchors described in Section 1901.3 of the 2021, 2018 and 2015 IBC. The anchors may also be used where an engineered design is submitted in accordance with Section R301.1.3 of the IRC.

3.0 DESCRIPTION

3.1 Sample screw anchors

The Sample screw anchors are comprised of a body with hex washer head. The anchor is manufactured from carbon steel and is heat-treated. The anchoring system is available in a variety of lengths with nominal diameters of $\frac{3}{16}$ -inch and $\frac{1}{2}$ -inch. The Sample screw anchor is illustrated in [Figure 1](#).

3.2 Concrete:

Normal-weight and lightweight concrete must conform to Sections 1903 and 1905 of the IBC.




ESRs: What to Look For

Before approving products for installation, look for:

- A valid evaluation report by a qualified evaluation service provider with applicable accreditations
- Verification of the report relates to the product and use of such product and installation conditions
- Product report number, listing number, or mark of conformity

Valid evaluation reports and listings can be found on the ICC-ES online directory on our website at www.icc-es.org.





ICC-ES Evaluation Report

ESR-0000

Issued March 2023 This report also contains:

Subject to renewal March 2024 - CBC Supplement
- LABC Supplement

ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.
Copyright © 2024 ICC Evaluation Service, LLC. All rights reserved.

DIVISION: 03 00 00— CONCRETE Section: 03 16 00— Concrete Anchors DIVISION: 05 00 00— METALS Section: 05 05 19—Post- Installed Concrete Anchors	REPORT HOLDER: SAMPLE, INC. 	EVALUATION SUBJECT: SAMPLE SCREW ANCHORS FOR USE IN CRACKED AND UNCRACKED CONCRETE	
--	--	--	---

1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2021, 2018, 2015 [International Building Code® \(IBC\)](#)
- 2021, 2018, 2015 [International Residential Code® \(IRC\)](#)

For evaluation for compliance with codes adopted by the [Los Angeles Department of Building and Safety \(LADBS\)](#), see [ESR-0000 LABC and LARC Supplement](#).

Property evaluated:
Structural

2.0 USES

The Sample screw anchors are used as anchorage in cracked and uncracked normal-weight and lightweight concrete having a specified strength, f_c , of 2,500 psi to 8,500 psi (17.2 MPa to 58.6 MPa); to resist static, wind and seismic (Seismic Design Categories A through F) tension and shear loads.

The Sample screw anchors are an alternative to anchors described in Section 1901.3 of the 2021, 2018 and 2015 IBC. The anchors may also be used where an engineered design is submitted in accordance with Section R301.1.3 of the IRC.



3.0 DESCRIPTION

3.1 Sample screw anchors

The Sample screw anchors are comprised of a body with hex washer head. The anchor is manufactured from carbon steel and is heat-treated. The anchoring system is available in a variety of lengths with nominal diameters of $\frac{3}{16}$ -inch and $\frac{1}{2}$ -inch. The Sample screw anchor is illustrated in [Figure 1](#).

3.2 Concrete:

Normal-weight and lightweight concrete must conform to Sections 1903 and 1905 of the IBC.



Page 1 of 10

What are Acceptance Criteria?

- Developed by ICC-ES technical staff to address new or innovative products or applications not defined or contained in the codes.
- New criteria and changes to criteria are vetted in a public input process and are approved by an Evaluation Committee made up of code officials



Benefits of having an ICC-ES Evaluation Report (ESR) to a Code Official

- Provides the necessary evidence a code official can review to determine whether a product complies with codes and standards
 - Avoids otherwise required departmental time/resources to ensure compliance
 - Reduce health and safety risks and associated departmental liability
 - Speeds permitting review
 - Expedites approval by code officials
- ESRs are freely accessible for building departments and the general public.

ES ICC EVALUATION SERVICE™

ICC-ES Evaluation Report

ESR-0000

Issued March 2023 This report also contains:
 - CBC Supplement
 - LABC Supplement

Subject to renewal March 2024

ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.
 Copyright © 2024 ICC Evaluation Service, LLC. All rights reserved.

DIVISION: 03 00 00— CONCRETE Section: 03 16 00— Concrete Anchors DIVISION: 05 00 00— METALS Section: 05 05 19—Post- Installed Concrete Anchors	REPORT HOLDER: SAMPLE, INC. 	EVALUATION SUBJECT: SAMPLE SCREW ANCHORS FOR USE IN CRACKED AND UNCRACKED CONCRETE
--	---	--

1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2021, 2018, 2015 [International Building Code® \(IBC\)](#)
- 2021, 2018, 2015 [International Residential Code® \(IRC\)](#)

For evaluation for compliance with codes adopted by the [Los Angeles Department of Building and Safety \(LADBS\)](#), see [ESR-0000 LABC and LARC Supplement](#).

Property evaluated:
Structural

2.0 USES

The Sample screw anchors are used as anchorage in cracked and uncracked normal-weight and lightweight concrete having a specified strength, f'_c , of 2,500 psi to 8,500 psi (17.2 MPa to 58.6 MPa); to resist static, wind and seismic (Seismic Design Categories A through F) tension and shear loads.

The Sample screw anchors are an alternative to anchors described in Section 1901.3 of the 2021, 2018 and 2015 IBC. The anchors may also be used where an engineered design is submitted in accordance with Section R301.1.3 of the IRC.

3.0 DESCRIPTION

3.1 Sample screw anchors

The Sample screw anchors are comprised of a body with hex washer head. The anchor is manufactured from carbon steel and is heat-treated. The anchoring system is available in a variety of lengths with nominal diameters of 3/8-inch and 1/2-inch. The Sample screw anchor is illustrated in [Figure 1](#).

3.2 Concrete:

Normal-weight and lightweight concrete must conform to Sections 1903 and 1905 of the IBC.

Page 1 of 10


Code Official



Manufacturer



Designer

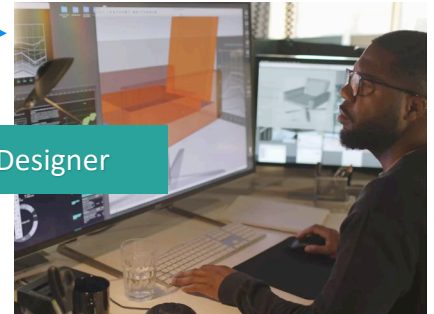

Benefits of an ICC-ES Evaluation Report to the Manufacturer

- Evidence to prove product complies with codes and standards
- Key to entering U.S. marketplace for domestic and foreign manufacturers
- ICC brand backing the code compliance of the product
- Reduces regulatory barriers and allows new and innovative products to be used in construction projects
- Competitive advantage



ICC-ES Evaluation Report

ESR-0000

Issued March 2023

This report also contains:

- CBC Supplement
- LABC Supplement

Subject to renewal March 2024

ICC-ES Evaluation Reports are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the report or a recommendation for its use. There is no warranty by ICC-Evaluation Services, LLC, express or implied, as to any finding or other matter in this report, or as to any product covered by the report.

Copyright © 2024 ICC Evaluation Service, LLC. All rights reserved.

DIVISION: 03 00 00—
CONCRETE
Section: 03 18 00—
Concrete Anchors
DIVISION: 05 00 00—
METALS
Section: 05 05 19—Post-
Installed Concrete
Anchors

REPORT HOLDER:
SAMPLE, INC.



EVALUATION SUBJECT:
SAMPLE SCREW
ANCHORS FOR USE IN
CRACKED AND
UNCRACKED
CONCRETE



1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2021, 2018, 2015 [International Building Code® \(IBC\)](#)
- 2021, 2018, 2015 [International Residential Code® \(IRC\)](#)

For evaluation for compliance with codes adopted by the [Los Angeles Department of Building and Safety \(LADBS\)](#), see [ESR-0000 LABC and LARC Supplement](#).

Property evaluated:

Structural

2.0 USES

The Sample screw anchors are used as anchorage in cracked and uncracked normal-weight and lightweight concrete having a specified strength, f'_c of 2,500 psi to 8,500 psi (17.2 MPa to 58.6 MPa); to resist static, wind and seismic (Seismic Design Categories A through F) tension and shear loads.

The Sample screw anchors are an alternative to anchors described in Section 1901.3 of the 2021, 2018 and 2015 IBC. The anchors may also be used where an engineered design is submitted in accordance with Section R301.1.3 of the IRC.

3.0 DESCRIPTION

3.1 Sample screw anchors


The Sample screw anchors are comprised of a body with hex washer head. The anchor is manufactured from carbon steel and is heat-treated. The anchoring system is available in a variety of lengths with nominal diameters of $\frac{3}{8}$ -inch and $\frac{1}{2}$ -inch. The Sample screw anchor is illustrated in [Figure 1](#).

3.2 Concrete:

Normal-weight and lightweight concrete must conform to Sections 1903 and 1905 of the IBC.



Page 1 of 10

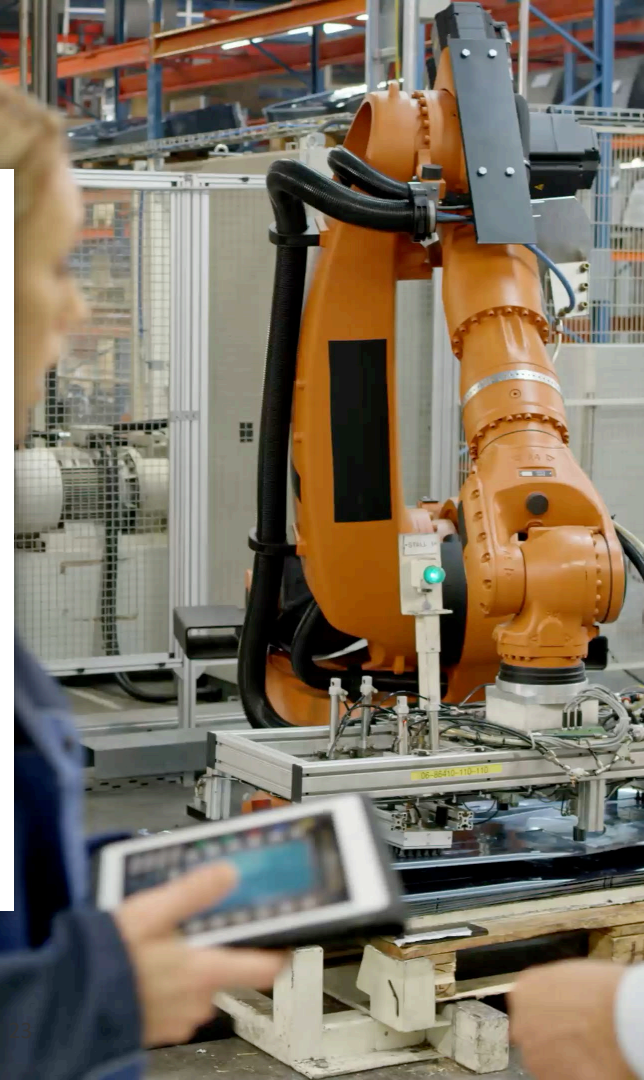


What Sets ICC-ES Apart?

- Only evaluation service body that is part of an entity that publishes the national building codes
- Highest quality of product review: evaluations are conducted by licensed professional engineers in a variety of disciplines (structural, mechanical, civil, etc.
- The only evaluation service body with institutional knowledge about ICC-ES Acceptance Criteria
- The only entity qualified to interpret and evaluate to ICC-ES Acceptance Criteria




Global Certification



INTERNATIONAL CODE COUNCIL
ICC
ES
ICC EVALUATION SERVICE

BUILDING SAFETY,
BUILDING CONFIDENCE
WORLDWIDE

Global Product Approval through
Quality Conformity Assessment




Access your free copy of the
digital resource guide here!



SCAN ME



Questions

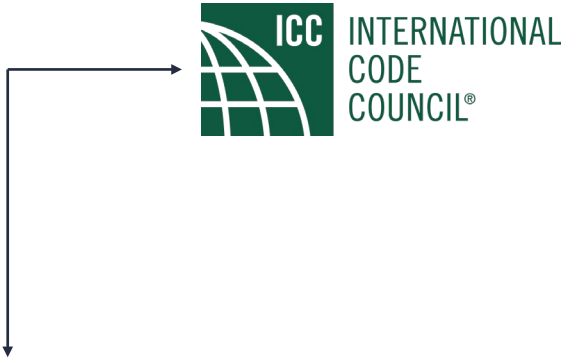

Family of Solutions

