

Introduction

The Steel Framing Industry Association (SFIA) was formed with the objective of assisting companies having interests in the cold-formed steel framing industry to be more successful by unifying the industry to expand the market for the use of cold formed steel systems through:

- (a) Quality Assurance
- (b) Promotion
- (c) Advocacy
- (d) Education
- (e) Innovation

The SFIA developed this Industry leading product technical guide to comply with the latest building codes and standards. The data in this catalog based on the American Iron and Steel Institute's AISI S100-16/S1-18 "North American Specification for the Design of Cold-Formed Steel Structural Members and meets the requirements of the IBC 2012 Building Code" with Supplement 1. While building codes vary by jurisdiction, this program follows the most recent international standards published by the International Code Council; the most widely recognized building code authority in North America.

Material Specification

Products manufactured by SFIA members are formed from steel with a minimum yield stress of 33 or 50 kips per square inch (ksi). Unless noted otherwise, all products covered in this SFIA catalog are engineered to meet the 2016 edition of the American Iron and Steel Institute (AISI) S100 with Supplement 1, North American Specification of the Design of Cold-Formed Steel Structural Members and other AISI standards referenced in section 2210 of the 2012 International Building Code (IBC-2012). The structural properties in this SFIA catalog have been computed based on allowable stress design (ASD) which includes distortional buckling considerations for all Stud Sections. For fastener tables, screw sizes and head diameters do not refer to specific fasteners which may or may not be available from SFIA member companies. Shear and tension data for screws was developed using published manufacturer data and evaluation reports available at the time of publications.

Disclaimer

A concerted effort has been made to ensure the accuracy of the technical data represented in this catalog. The Steel Framing Industry Association makes no representation, warranty, or guarantee in connection with this technical data and expressly disclaims any liability or responsibility for failure resulting from the use or misapplication of computations, detail drawings and specifications contained herein. All data, specifications and details contained in this catalog publications are intended as a general guide for using SFIA member companies products. These products should not be used in design or construction without an independent evaluation by a qualified engineer or architect to verify the suitability of a particular product for use in a specific application. This publication contains the latest information available at the time of printing. The SFIA and its member companies reserve the right to make modifications and/or change materials of any of their products without prior notice or obligation. For the latest information regarding a particular manufacturer's products contact that manufacturer. All SFIA manufacturers may not produce all of the products listed in this catalog. Please contact manufacturer to verify product availability.

Table of Contents

INTRODUCTION.....	Inside Front Cover
Material Specifications.....	Inside Front Cover
Disclaimer.....	Inside Front Cover
Table of Contents.....	3
General Product Information.....	4
Product Identification.....	4
Thickness – Steel Components.....	5
Design Stiffening Lip Length.....	5
General Notes for all Tables.....	5
Definitions of Structural Property Symbols.....	5
Section Properties.....	6
Section Properties Table Notes.....	6
Non-Structural (S) Stud Section Properties.....	6
Structural (S) Stud Section Properties.....	7
Structural (T) Track Section Properties.....	11
Thickness – Steel Components.....	16
Web Depth to Thickness Ratios.....	16
Wall Height Tables.....	17
Interior Non-Structural Non-Composite.....	17
Interior Non-Structural Composite.....	20
Limiting Wall Heights – Curtain Wall Single-Span Table Notes.....	22
Limiting Wall Heights – Curtain Wall Single-Span.....	24
Combined Axial and Lateral Load Tables.....	31
Combined Axial and Lateral Load Table Notes.....	31
Combined Axial and Lateral Loads	32
Floor and Roof Joist Span Tables.....	48
Allowable Floor and Roof Joist Span Table Notes.....	48
Allowable Floor and Roof Joist Spans.....	48
Header Load Tables.....	51
Header Load Table Notes.....	51
Header Allowable Uniform Loads.....	51
Web Crippling Load Tables.....	54
Web Crippling Load Table Notes.....	54
Web Crippling Conditions.....	54
Allowable Web Crippling Loads – Single Members.....	55
Allowable Web Crippling Loads – Back-to-Back Members.....	56
Channel Properties.....	57
U-Channel Section Properties.....	57
U-Channel Allowable Ceiling Spans.....	57
(Hat) Furring (F) Channel Section Properties.....	58
(Hat) Furring (F) Channel Allowable Ceiling Spans.....	58
Fasteners (Screws and Welds).....	60
Allowable Loads for Screw Connections.....	60
Allowable Loads for Fillet Welds and Flare Groove Welds.....	60
Typical Details.....	61
Joist Bridging.....	61
Strapping Lateral Bracing.....	62
SFIA Information.....	Back Cover

General Product Information

The Steel Framing Industry Association (SFIA) supports the industry standard nomenclature published in the American Iron and Steel Institutes's (AISI) General Provisions, S200. The AISI S200 states in Section A5.2 that *"structural members and non-structural members shall use a four-part product designator that identifies the size (both web depth and flange width), style, and thickness."* An example of this designator is shown below:


EXAMPLE:

MEMBER DEPTH:

(Example: $3\text{-}5/8" = 3.625" \sim 362 \times 1/100$ inches)
All member depths are taken in 1/100 inches.
For all "T" Sections member depths is the inside to inside dimension.

FLANGE WIDTH:

(Example: $1\text{-}5/8" = 1.625" \sim 162 \times 1/100$ inches)
All flange widths are taken in 1/100 inches.

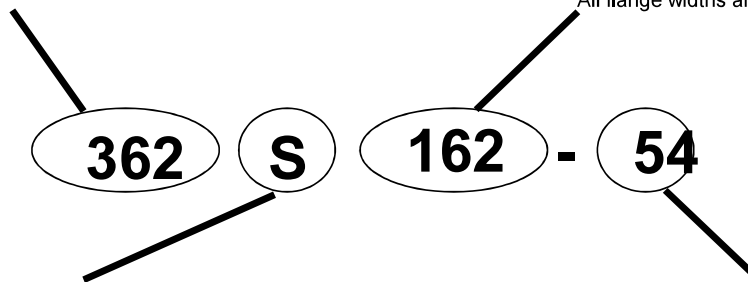

STYLE:

(Example: Stud or Joist section = S)
The four alpha characters utilized by the designator system are:
S = Stud or Joist Sections
T = Track Sections
U = Channel Sections
F = Furring Channel Sections

MATERIAL THICKNESS:

(Example: 0.054 in = 54 mils; 1 mil = 1/1000 in.)
Material thickness is the minimum base metal thickness in mils. Minimum base metal thickness represents 95% of the design thickness.

NOTE: For Structural members 54 mil (16 gauge) and thicker, that have both 33 and 50 ksi yield strength options shown, the designer shall identify which yield strength he has specified and the manufacturer shall label the product with the yield strength.

General Product Information

Thickness Table

Designation Thickness (Mils)	Minimum Thickness (in)	Design Thickness ¹ (in)	Design Inside Corner Radii ² (in)	Reference Gauge No.
18	0.0179	0.0188	0.0844	25
27	0.0269	0.0283	0.0796	22
30	0.0296	0.0312	0.0782	20-Drywall
33	0.0329	0.0346	0.0765	20-Structural
43	0.0428	0.0451	0.0712	18
54	0.0538	0.0566	0.0849	16
68	0.0677	0.0713	0.1070	14
97	0.0966	0.1017	0.1526	12
118	0.1180	0.1242	0.1863	10

¹ Minimum Thickness represents 95% of the design thickness and is the minimum acceptable thickness delivered to the jobsite based on section B7.1 of the AISI S100-16 with S1-18 Supplement.

² The tables in this catalog are calculated based on inside corner radii listed in this table.

Design Stiffening Lip Length

Section	Flange Width	Design Stiffening Lip Length (in)
S125	1 1/4"	0.188
S137	1 3/8"	0.375
S162	1 5/8"	0.500
S200	2"	0.625
S250	2 1/2"	0.625
S300	3"	0.625
S350	3 1/2"	1.000

General Notes for all Tables

- Where AISI S100-16 is referenced, it is the "North American Specification for the Design of Cold-Formed Steel Structural Members", 2016 Edition, with US provisions and "Supplement 1 to the 2016 Edition of the North American Specification for the Design of Cold-Formed Steel Structural Members".
- The strength increase from cold work of forming has been incorporated for flexural strength per section A3.3.2 of AISI S100-16/S1-18.
- The effective moment of inertia for deflection is calculated at a stress which results in a section modulus such that the stress times the section modulus at that stress is equal to the allowable moment. AISI S100-16/S1-18 Specification Procedure 1 for serviceability determination has been used. Increases in the effective moment of Inertia (I_{xe}) may be possible at lower stress levels. Any modified values would be required to be calculated by a qualified engineer.
- Various sections may be manufactured with yield points of 33 or 50 ksi. The yield point used for calculations are listed in the tables.
- For sections available in both 33 and 50 ksi, the specifier must be clearly indicate which yield point is required. For ex. 362S162-68 (50ksi).
- When provided, factory punchouts will be located along the centerline of the webs of the members and will have a minimum center-to-center spacing of 24 inches. Punchouts for members greater than 2.5 inches deep are a maximum of 1.5 inches wide x 4 inches long. Members with depths 2.5 inches and smaller are maximum of 3/4 inches wide x 4 inches long.


Definitations of Structural Property Symbols

Gross Properties

- Ix: Moment of inertia of gross section about the X-X axis (strong axis).
 Sx: Section modulus about the X-X axis (strong axis).
 Rx: Radius of gyration of the gross section about the X-X axis.
 Iy: Moment of inertia of gross section about the Y-Y axis (weak axis).
 Ry: Radius of gyration of the gross section about the Y-Y axis.

Effective Properties

- Ixe: Effective moment of inertia about the X-axis.
 Sxe: Effective section modulus about the X-X axis (strong axis) stress = F_y .
 Ma: Allowable Bending Moment - Based on the effective section modulus and the allowable stress including the strength increase from the cold-work of forming (section A3.3.2) where applicable.
 Mad: Allowable Bending Moment - Based on Distortional Buckling Strength calculated per Sections F4, F4.1 of AISI S100-16/S1-18.
 Vag: Allowable strong axis shear away from punchout, calculated in accordance with Section G2 of AISI S100-16/S1-18.
 Vanet: Allowable strong axis shear at punchout, calculated in accordance with Section G3 of AISI S100-16/S1-18.



Torsional and Other Properties

- J: St. Venant Torsional Constant.
 Cw: Torsional warping constant.
 m: Distance from shear center to mid-plane of web.
 Xo: Distance from the shear center to the centroid along the principal X-axis.
 Ro: Polar radius of gyration about the centroidal principal axis.
 β : $1 - (X_o/R_o)^2$
 Lu: The longest weak axis (L_y) and torsional (L_t) unbraced length at which lateral torsional buckling is restrained in accordance with Section F2.1 of AISI S100-16/S1-18.

Section Properties

Section Properties Table Notes

1. Calculated properties are based on AISI S100-16/S1-18, North American Specification for Design of Cold-Formed Steel Structural Members with Supplement 1.
2. The centerline bend radius is based on inside corner radii shown in thickness chart.
3. Effective properties incorporate the strength increase from the cold work of forming as applicable per AISI A3.3.2.
4. Tabulated gross properties are based on full-unreduced cross section of the studs, away from punchouts.
5. For deflection calculations, use the effective moment of inertia.
6. Allowable moment includes cold-work of forming.
7. For the steels that have both 33 and 50 ksi listing, if the design is based on 50 ksi, the 50 ksi steel needs to be specified. (ex. 3.625 S137 16-50 (50 ksi))
8. Web depth for track sections is equal to the nominal height plus 2 times the design thickness plus the bend radius. Hems on non-structural rack sections are ignored.

Non-Structural (S) Stud Section Properties

Member	Design Thickness		F _y (ksi)	Gross Properties						Effective Properties						Torsional Properties						L _u	
	(in)			Area (in ²)	Weight (lb/ft)	I _x (in ⁴)	S _x (in ³)	R _x (in)	I _y (in ⁴)	R _y (in)	I _{xe} (in ⁴)	S _{xe} (in ³)	M _a (in-k)	M _{ad} (in-k)	V _{ag} (lb)	V _{ad} (lb)	Jx1000 (in ⁴)	C _w (in ⁶)	X _o (in)	m (in)	R _o (in)		β
162S125-18	0.0188		33	0.080	0.27	0.038	0.046	0.686	0.016	0.447	0.030	0.031	0.62	0.58	302	100	0.009	0.009	-1.029	0.594	1.315	0.388	29.0
162S125-27	0.0283		33	0.120	0.41	0.056	0.069	0.682	0.023	0.443	0.048	0.053	1.05	0.99	494	106	0.032	0.013	-1.018	0.587	1.303	0.390	29.1
162S125-30	0.0312		33	0.132	0.45	0.061	0.075	0.681	0.026	0.441	0.054	0.061	1.20	1.13	543	106	0.043	0.014	-1.014	0.585	1.299	0.390	29.2
162S125-33	0.0346		33	0.145	0.49	0.067	0.083	0.679	0.028	0.440	0.061	0.070	1.38	1.28	601	105	0.058	0.016	-1.010	0.583	1.294	0.391	29.3
250S125-18	0.0188		33	0.097	0.33	0.099	0.079	1.014	0.019	0.439	0.082	0.058	1.14	0.93	258	196	0.011	0.023	-0.904	0.543	1.428	0.599	29.0
250S125-27	0.0283		33	0.144	0.49	0.147	0.118	1.009	0.027	0.434	0.130	0.096	1.89	1.61	685	354	0.039	0.034	-0.893	0.537	1.416	0.602	28.9
250S125-30	0.0312		33	0.159	0.54	0.161	0.129	1.008	0.030	0.433	0.145	0.108	2.14	1.84	833	378	0.052	0.037	-0.890	0.535	1.413	0.603	28.9
250S125-33	0.0346		33	0.176	0.60	0.178	0.142	1.007	0.033	0.431	0.164	0.124	2.45	2.11	975	399	0.070	0.040	-0.886	0.532	1.409	0.604	28.9
250S125-43	0.0451		33	0.227	0.77	0.228	0.182	1.002	0.041	0.427	0.222	0.181	3.47	3.00	1266	394	0.154	0.050	-0.874	0.526	1.396	0.608	28.9
250S125-54	0.0566		33	0.280	0.95	0.277	0.222	0.994	0.049	0.419	0.272	0.220	4.27	3.99	1553	373	0.299	0.060	-0.859	0.518	1.379	0.612	28.8
350S125-18	0.0188		33	0.115	0.39	0.215	0.123	1.366	0.021	0.423	0.160	0.075	1.48	1.34	180	159	0.014	0.050	-0.798	0.495	1.638	0.763	28.8
350S125-27	0.0283		33	0.173	0.59	0.320	0.183	1.361	0.030	0.419	0.268	0.135	2.67	2.37	614	359	0.046	0.073	-0.788	0.489	1.627	0.766	28.7
350S125-30	0.0312		33	0.190	0.65	0.351	0.201	1.360	0.033	0.417	0.303	0.156	3.08	2.71	824	435	0.062	0.079	-0.784	0.488	1.624	0.767	28.6
350S125-33	0.0346		33	0.210	0.72	0.388	0.222	1.358	0.036	0.416	0.344	0.181	3.58	3.13	1024	487	0.084	0.087	-0.781	0.485	1.621	0.768	28.6
350S125-43	0.0451		33	0.272	0.93	0.498	0.284	1.352	0.046	0.411	0.475	0.265	5.25	4.51	1740	631	0.185	0.109	-0.769	0.479	1.609	0.771	28.5
350S125-54	0.0566		33	0.337	1.15	0.609	0.348	1.344	0.055	0.403	0.587	0.332	6.57	6.08	2253	633	0.360	0.131	-0.755	0.472	1.593	0.775	28.4
362S125-18	0.0188		33	0.118	0.40	0.234	0.129	1.409	0.021	0.421	0.173	0.078	1.54	1.39	173	163	0.014	0.054	-0.786	0.490	1.667	0.778	28.8
362S125-27	0.0283		33	0.176	0.60	0.347	0.192	1.404	0.031	0.416	0.290	0.141	2.78	2.47	592	370	0.047	0.079	-0.776	0.484	1.657	0.781	28.6
362S125-30	0.0312		33	0.194	0.66	0.381	0.210	1.402	0.033	0.415	0.328	0.162	3.21	2.83	793	449	0.063	0.086	-0.773	0.482	1.654	0.782	28.6
362S125-33	0.0346		33	0.215	0.73	0.421	0.232	1.401	0.037	0.413	0.373	0.189	3.73	3.26	1024	521	0.086	0.094	-0.770	0.480	1.651	0.783	28.5
362S125-43	0.0451		33	0.278	0.95	0.541	0.298	1.395	0.046	0.408	0.516	0.278	5.48	4.71	1740	676	0.188	0.118	-0.758	0.474	1.640	0.786	28.4
362S125-54	0.0566		33	0.344	1.17	0.661	0.365	1.386	0.055	0.401	0.639	0.349	6.91	6.36	2341	705	0.367	0.142	-0.744	0.466	1.624	0.790	28.3
400S125-18 ¹	0.0188		33	0.125	0.42	0.294	0.147	1.536	0.021	0.415	0.215	0.087	1.43	1.29	156	125	0.015	0.068	-0.755	0.475	1.761	0.816	28.7
400S125-27	0.0283		33	0.187	0.64	0.438	0.219	1.531	0.031	0.410	0.363	0.158	3.12	2.76	533	398	0.050	0.098	-0.745	0.469	1.751	0.819	28.5
400S125-30	0.0312		33	0.206	0.70	0.481	0.240	1.529	0.034	0.409	0.411	0.182	3.60	3.16	715	484	0.067	0.108	-0.742	0.467	1.748	0.820	28.5
400S125-33	0.0346		33	0.228	0.77	0.531	0.265	1.527	0.038	0.407	0.468	0.213	4.20	3.66	976	595	0.091	0.118	-0.738	0.465	1.745	0.821	28.4
400S125-43	0.0451		33	0.295	1.00	0.682	0.341	1.522	0.048	0.402	0.650	0.314	6.20	5.31	1740	810	0.200	0.148	-0.727	0.459	1.734	0.824	28.2
400S125-54	0.0566		33	0.365	1.24	0.836	0.418	1.512	0.057	0.394	0.809	0.399	7.88	7.19	2604	944	0.390	0.178	-0.713	0.452	1.718	0.828	28.1
550S125-18 ²	0.0188		33	0.153	0.52	0.630	0.229	2.029	0.023	0.390	0.449	0.130	2.14	1.77	112	89	0.018	0.141	-0.651	0.423	2.166	0.910	28.2
550S125-27	0.0283		33	0.229	0.78	0.939	0.341	2.023	0.034	0.385	0.767	0.238	4.70	3.89	382	382	0.061	0.205	-0.642	0.417	2.158	0.912	27.9
550S125-30	0.0312		33	0.252	0.86	1.032	0.375	2.022	0.037	0.384	0.870	0.275	5.44	4.49	512	512	0.082	0.224	-0.639	0.416	2.155	0.912	27.9
550S125-33	0.0346		33	0.279	0.95	1.140	0.415	2.020	0.041	0.382	0.993	0.321	6.35	5.23	698	698	0.112	0.246	-0.636	0.414	2.152	0.913	27.8
550S125-43	0.0451		33	0.362	1.23	1.469	0.534	2.013	0.052	0.377	1.404	0.492	9.72	7.71	1550	1199	0.246	0.309	-0.626	0.408	2.142	0.915	27.6
550S125-54	0.0566		33	0.450	1.53	1.806	0.657	2.003	0.062	0.370	1.773	0.641	12.66	10.63	2740	1666	0.481	0.374	-0.613	0.401	2.127	0.917	27.3
600S125-18 ²	0.0188		33	0.162	0.55	0.779	0.260	2.190	0.024	0.382	0.543	0.142	2.35	1.92	102	82	0.019	0.172	-0.623	0.408	2.308	0.927	28.0
600S125-27 ¹	0.0283		33	0.243	0.83	1.161	0.387	2.184	0.035	0.378	0.932	0.262	4.33	3.54	349	279	0.065	0.251	-0.614	0.403	2.300	0.929	27.7
600S125-30	0.0312		33	0.268	0.91	1.276	0.425	2.182	0.038	0.376	1.059	0.304	6.00	4.91	468	468	0.087	0.274	-0.611	0.401	2.297	0.929	27.7
600S125-33	0.0346		33	0.297	1.01	1.410	0.470	2.180	0.042	0.375	1.212	0.355	7.01	5.73	638	638	0.118	0.300	-0.608	0.399	2.294	0.930	27.6
600S125-43	0.0451		33	0.385	1.31	1.818	0.606	2.173	0.053	0.370	1.719	0.544	10.75	8.50	1415	1240	0.261	0.379	-0.598	0.393	2.284	0.931	27.3
600S125-54	0.0566		33	0.479	1.63	2.237	0.746	2.162	0.063	0.362	2.189	0.720	14.24	11.77	2740	1890	0.511	0.457	-0.586	0.386	2.269	0.933	27.1
800S125-33 ¹	0.0346		33	0.366	1.24	2.883	0.721	2.807	0.044	0.347	2.331	0.492	8.11	6.28	474	379	0.146	0.583	-0.519	0.350	2.875	0.967	26.6
800S125-43	0.0451		33	0.475	1.62	3.723	0.931	2.799	0.056	0.342	3.337	0.750	14.82	11.36	1051	1051	0.322	0.735	-0.510	0.344	2.866	0.968	26.4
800S125-54	0.0566		33	0.592	2.01	4.596	1.149	2.787	0.066	0.335	4.323	1.018	20.12	16.01	2091	2091	0.632	0.890	-0.500	0.338	2.851	0.969	26.0

¹ Web-height to thickness ratio exceeds 200. Web Stiffeners are required at all support points and concentrated loads.

² When web height-to thickness ratio exceeds 260, or flange width-to-thickness ratio exceeds 60, effective properties are not calculated (limitations in AISI section B4.1).

Section Properties

Structural (S) Stud Section Properties

Member	Design Thickness (in)	F _y (ksi)	Gross Properties							Effective Properties						Torsional Properties						L _u (in)
			Area (in ²)	Weight (lb/ft)	I _x (in ⁴)	S _x (in ³)	R _x (in)	I _y (in ⁴)	R _y (in)	I _{lx} (in ⁴)	S _{lx} (in ³)	M _a (in-k)	M _{ed} (in-k)	V _{ag} (lb)	V _{anet} (lb)	Jx1000 (in ⁴)	C _w (in ⁶)	X _o (in)	m (in)	R _o (in)	β	
250S137-33	0.0346	33	0.197	0.67	0.203	0.163	1.015	0.052	0.515	0.199	0.157	3.09	2.91	975	399	0.079	0.076	-1.141	0.677	1.612	0.499	35.6
250S137-43	0.0451	33	0.255	0.87	0.261	0.208	1.011	0.067	0.511	0.259	0.207	4.25	4.14	1266	394	0.173	0.096	-1.129	0.670	1.599	0.501	33.6
250S137-54	0.0566	33	0.316	1.07	0.318	0.255	1.004	0.080	0.504	0.316	0.253	5.72	5.71	1553	373	0.337	0.115	-1.115	0.663	1.583	0.504	33.4
250S137-54	0.0566	50	0.316	1.07	0.318	0.255	1.004	0.080	0.504	0.312	0.246	7.38	7.09	2353	565	0.337	0.115	-1.115	0.663	1.583	0.504	27.1
250S137-68	0.0713	50	0.390	1.33	0.386	0.309	0.995	0.096	0.495	0.384	0.307	10.62	10.22	2866	519	0.661	0.138	-1.096	0.653	1.561	0.507	26.8
250S162-33	0.0346	33	0.223	0.76	0.235	0.188	1.027	0.087	0.624	0.228	0.179	3.54	3.41	975	399	0.089	0.146	-1.470	0.859	1.898	0.401	44.1
250S162-43	0.0451	33	0.289	0.98	0.302	0.242	1.022	0.111	0.620	0.30	0.24	5.15	5.01	1266	394	0.196	0.184	-1.457	0.852	1.885	0.402	42.1
250S162-54	0.0566	33	0.358	1.22	0.370	0.296	1.016	0.135	0.613	0.368	0.294	6.53	6.53	1553	373	0.383	0.223	-1.443	0.845	1.868	0.404	41.8
250S162-54	0.0566	50	0.358	1.22	0.370	0.296	1.016	0.135	0.613	0.364	0.287	8.60	8.32	2353	565	0.383	0.223	-1.443	0.845	1.868	0.404	33.9
250S162-68	0.0713	50	0.443	1.51	0.450	0.360	1.008	0.162	0.605	0.448	0.358	11.97	11.73	2866	519	0.752	0.268	-1.424	0.835	1.847	0.405	33.7
350S162-33	0.0346	33	0.258	0.88	0.508	0.291	1.404	0.098	0.617	0.480	0.264	5.22	4.99	1024	487	0.103	0.277	-1.324	0.796	2.026	0.573	42.7
350S162-43	0.0451	33	0.334	1.14	0.655	0.374	1.400	0.125	0.612	0.640	0.364	7.18	6.68	1740	631	0.227	0.350	-1.312	0.789	2.014	0.575	42.6
350S162-54	0.0566	33	0.415	1.41	0.805	0.460	1.393	0.152	0.606	0.789	0.451	10.01	9.82	2253	633	0.443	0.426	-1.298	0.782	1.998	0.578	42.7
350S162-54	0.0566	50	0.415	1.41	0.805	0.460	1.393	0.152	0.606	0.775	0.435	13.02	12.35	3372	947	0.443	0.426	-1.298	0.782	1.998	0.578	34.5
350S162-68	0.0713	50	0.515	1.75	0.985	0.563	1.383	0.184	0.597	0.965	0.551	18.26	17.49	4203	897	0.872	0.514	-1.280	0.772	1.977	0.581	34.5
350S162-97	0.1017	50	0.711	2.42	1.321	0.755	1.363	0.238	0.579	1.294	0.739	26.22	26.15	5705	775	2.452	0.672	-1.242	0.752	1.932	0.587	34.7
350S200-43	0.0451	33	0.379	1.29	0.771	0.441	1.426	0.224	0.768	0.744	0.418	8.25	8.08	1740	631	0.257	0.687	-1.748	1.032	2.383	0.462	53.7
350S200-54	0.0566	33	0.471	1.60	0.950	0.543	1.420	0.274	0.762	0.935	0.534	11.62	11.37	2253	633	0.503	0.838	-1.733	1.024	2.367	0.464	53.8
350S200-54	0.0566	50	0.471	1.60	0.950	0.543	1.420	0.274	0.762	0.885	0.481	14.40	14.26	3372	947	0.503	0.838	-1.733	1.024	2.367	0.464	43.5
350S200-68	0.0713	50	0.586	1.99	1.167	0.667	1.411	0.333	0.754	1.137	0.643	19.25	18.87	4203	897	0.993	1.018	-1.715	1.014	2.345	0.465	43.5
350S200-97	0.1017	50	0.813	2.77	1.577	0.901	1.393	0.440	0.736	1.550	0.886	30.55	30.35	5705	775	2.803	1.347	-1.676	0.994	2.300	0.469	43.9
362S137-33	0.0346	33	0.236	0.80	0.479	0.264	1.424	0.059	0.501	0.453	0.239	4.73	4.45	1024	521	0.094	0.165	-1.003	0.615	1.813	0.694	34.7
362S137-43	0.0451	33	0.306	1.04	0.616	0.340	1.419	0.075	0.497	0.600	0.328	6.48	6.20	1740	676	0.207	0.208	-0.991	0.608	1.801	0.697	34.6
362S137-54	0.0566	33	0.379	1.29	0.756	0.417	1.412	0.091	0.490	0.740	0.408	8.87	8.44	2341	705	0.405	0.251	-0.978	0.601	1.786	0.700	34.6
362S137-54	0.0566	50	0.379	1.29	0.756	0.417	1.412	0.091	0.490	0.726	0.392	11.73	11.05	3372	1016	0.405	0.251	-0.978	0.601	1.786	0.700	27.9
362S137-68	0.0713	50	0.470	1.60	0.923	0.509	1.401	0.109	0.481	0.903	0.498	17.23	16.15	4370	1004	0.797	0.302	-0.959	0.592	1.765	0.704	27.8
362S162-33	0.0346	33	0.262	0.89	0.551	0.304	1.450	0.099	0.616	0.520	0.275	5.44	5.20	1024	521	0.105	0.297	-1.308	0.789	2.048	0.592	42.6
362S162-43	0.0451	33	0.340	1.16	0.710	0.392	1.445	0.127	0.611	0.694	0.380	7.50	7.00	1740	676	0.230	0.376	-1.297	0.782	2.036	0.594	42.5
362S162-54	0.0566	33	0.422	1.44	0.873	0.482	1.438	0.154	0.605	0.857	0.473	10.27	9.94	2341	705	0.451	0.457	-1.283	0.774	2.020	0.597	42.5
362S162-54	0.0566	50	0.422	1.44	0.873	0.482	1.438	0.154	0.605	0.841	0.454	13.60	12.87	3372	1016	0.451	0.457	-1.283	0.774	2.020	0.597	34.4
362S162-68	0.0713	50	0.524	1.78	1.069	0.590	1.429	0.186	0.596	1.049	0.579	19.16	18.24	4370	1004	0.887	0.552	-1.264	0.765	1.999	0.600	34.4
362S162-97	0.1017	50	0.724	2.46	1.436	0.792	1.408	0.241	0.577	1.408	0.777	27.56	27.47	5943	875	2.496	0.723	-1.226	0.745	1.954	0.606	34.5
362S200-33	0.0346	33	0.297	1.01	0.648	0.358	1.478	0.177	0.772	0.587	0.301	5.96	5.98	1024	521	0.118	0.577	-1.741	1.030	2.411	0.478	53.6
362S200-43	0.0451	33	0.385	1.31	0.836	0.461	1.474	0.227	0.767	0.807	0.436	8.62	8.41	1740	676	0.261	0.734	-1.729	1.024	2.398	0.480	53.5
362S200-54	0.0566	33	0.479	1.63	1.030	0.568	1.467	0.277	0.761	1.014	0.560	12.16	11.87	2341	705	0.511	0.896	-1.715	1.016	2.382	0.482	53.6
362S200-54	0.0566	50	0.479	1.63	1.030	0.568	1.467	0.277	0.761	0.959	0.502	15.03	14.84	3372	1016	0.511	0.896	-1.715	1.016	2.382	0.482	43.3
362S200-68	0.0713	50	0.595	2.02	1.266	0.698	1.458	0.337	0.753	1.234	0.674	20.18	19.67	4370	1004	1.008	1.089	-1.696	1.006	2.360	0.484	43.3
362S200-97	0.1017	50	0.826	2.81	1.712	0.945	1.440	0.446	0.735	1.685	0.929	32.07	31.84	5943	875	2.847	1.441	-1.658	0.986	2.316	0.487	43.6
362S250-43	0.0451	33	0.430	1.46	0.980	0.541	1.510	0.385	0.946	0.892	0.459	9.07	9.06	1740	676	0.292	1.230	-2.199	1.277	2.830	0.396	64.1
362S250-54	0.0566	33	0.535	1.82	1.210	0.668	1.504	0.473	0.940	1.128	0.592	11.69	12.06	2341	705	0.571	1.506	-2.184	1.269	2.813	0.397	64.3
362S250-54	0.0566	50	0.535	1.82	1.210	0.668	1.504	0.473	0.940	1.055	0.526	15.74	15.93	3372	1016	0.571	1.506	-2.184	1.269	2.813	0.397	52.0
362S250-68	0.0713	50	0.666	2.27	1.491	0.823	1.496	0.578	0.931	1.358	0.700	20.94	22.30	4370	1004	1.129	1.837	-2.165	1.259	2.791	0.398	52.0
362S250-97	0.1017	50																				

Structural (S) Stud Section Properties

Member	Design Thickness (in)	F _y (ksi)	Gross Properties							Effective Properties						Torsional Properties						L _u (in)
			Area (in ²)	Weight (lb/ft)	I _x (in ⁴)	S _x (in ³)	R _x (in)	I _y (in ⁴)	R _y (in)	I _x (in ⁴)	S _x (in ³)	M _a (in-k)	M _{ed} (in-k)	V _{ag} (lb)	V _{ad} (lb)	Jx1000 (in ⁴)	C _w (in ⁶)	X _o (in)	m (in)	R _o (in)	β	
550S162-33	0.0346	33	0.327	1.11	1.459	0.530	2.112	0.113	0.589	1.418	0.508	10.03	8.28	698	698	0.130	0.713	-1.114	0.697	2.459	0.795	41.4
550S162-43	0.0451	33	0.424	1.44	1.884	0.685	2.107	0.145	0.584	1.871	0.680	14.44	12.37	1550	1199	0.288	0.905	-1.103	0.691	2.449	0.797	41.2
550S162-54	0.0566	33	0.528	1.80	2.325	0.845	2.098	0.176	0.577	2.309	0.840	18.64	17.07	2740	1666	0.564	1.105	-1.090	0.684	2.434	0.800	41.0
550S162-54	0.0566	50	0.528	1.80	2.325	0.845	2.098	0.176	0.577	2.272	0.815	24.41	20.87	3093	1881	0.564	1.105	-1.090	0.684	2.434	0.800	33.2
550S162-68	0.0713	50	0.657	2.24	2.862	1.041	2.087	0.212	0.569	2.842	1.034	33.97	29.87	5352	2532	1.114	1.342	-1.072	0.675	2.414	0.803	33.1
550S162-97	0.1017	50	0.915	3.11	3.887	1.414	2.062	0.276	0.550	3.860	1.404	49.79	48.69	9518	3026	3.154	1.775	-1.037	0.656	2.372	0.809	32.8
550S200-33	0.0346	33	0.362	1.23	1.694	0.616	2.164	0.204	0.751	1.585	0.553	10.92	9.49	698	698	0.144	1.326	-1.508	0.925	2.743	0.698	51.9
550S200-43	0.0451	33	0.469	1.60	2.189	0.796	2.159	0.261	0.746	2.144	0.772	15.25	13.50	1550	1199	0.318	1.691	-1.496	0.918	2.731	0.700	51.7
550S200-54	0.0566	33	0.585	1.99	2.707	0.984	2.152	0.320	0.739	2.691	0.979	21.29	19.28	2740	1666	0.624	2.072	-1.483	0.911	2.716	0.702	51.6
550S200-54	0.0566	50	0.585	1.99	2.707	0.984	2.152	0.320	0.739	2.556	0.893	26.74	23.86	3093	1881	0.624	2.072	-1.483	0.911	2.716	0.702	41.8
550S200-68	0.0713	50	0.729	2.48	3.341	1.215	2.141	0.389	0.731	3.284	1.182	35.39	32.07	5352	2532	1.235	2.531	-1.465	0.902	2.695	0.705	41.7
550S200-97	0.1017	50	1.016	3.46	4.565	1.660	2.119	0.516	0.713	4.537	1.650	56.92	54.74	9518	3026	3.504	3.384	-1.428	0.882	2.653	0.710	41.5
600S137-33	0.0346	33	0.318	1.08	1.583	0.528	2.230	0.069	0.464	1.451	0.442	8.73	7.76	638	638	0.127	0.500	-0.807	0.519	2.416	0.889	33.5
600S137-43	0.0451	33	0.413	1.41	2.042	0.681	2.224	0.087	0.459	1.976	0.635	12.56	11.17	1415	1240	0.280	0.633	-0.796	0.513	2.406	0.890	33.3
600S137-54	0.0566	33	0.514	1.75	2.518	0.839	2.214	0.105	0.452	2.492	0.826	16.33	15.05	2740	1890	0.549	0.769	-0.784	0.506	2.392	0.893	33.0
600S137-54	0.0566	50	0.514	1.75	2.518	0.839	2.214	0.105	0.452	2.400	0.765	22.90	19.85	2822	1947	0.549	0.769	-0.784	0.506	2.392	0.893	26.8
600S137-68	0.0713	50	0.640	2.18	3.095	1.032	2.200	0.125	0.443	3.073	1.024	30.65	26.91	5352	2880	1.084	0.930	-0.768	0.497	2.372	0.895	26.5
600S137-97	0.1017	50	0.889	3.03	4.190	1.397	2.171	0.159	0.423	4.162	1.387	50.49	48.17	10472	3805	3.066	1.216	-0.734	0.480	2.330	0.901	26.1
600S162-33	0.0346	33	0.344	1.17	1.793	0.598	2.282	0.116	0.581	1.746	0.573	11.33	9.09	638	638	0.137	0.861	-1.072	0.677	2.588	0.828	41.1
600S162-43	0.0451	33	0.447	1.52	2.316	0.772	2.277	0.148	0.576	2.303	0.768	16.29	13.62	1415	1240	0.303	1.095	-1.062	0.670	2.577	0.830	40.9
600S162-54	0.0566	33	0.556	1.89	2.861	0.954	2.268	0.180	0.570	2.845	0.948	21.05	18.87	2740	1890	0.594	1.337	-1.049	0.663	2.563	0.833	40.7
600S162-54	0.0566	50	0.556	1.89	2.861	0.954	2.268	0.180	0.570	2.799	0.922	27.59	23.02	2822	1947	0.594	1.337	-1.049	0.663	2.563	0.833	33.0
600S162-68	0.0713	50	0.693	2.36	3.526	1.175	2.256	0.218	0.561	3.506	1.169	38.37	33.04	5352	2880	1.174	1.626	-1.032	0.655	2.543	0.835	32.8
600S162-97	0.1017	50	0.966	3.28	4.799	1.600	2.229	0.283	0.542	4.772	1.591	56.42	54.27	10472	3805	3.329	2.153	-0.997	0.636	2.501	0.841	32.5
600S162-118	0.1242	50	1.158	3.94	5.655	1.885	2.209	0.322	0.527	5.623	1.874	68.57	68.57	12526	3622	5.956	2.487	-0.971	0.623	2.470	0.846	32.3
600S200-33	0.0346	33	0.379	1.29	2.076	0.692	2.340	0.209	0.743	1.926	0.610	12.06	10.43	638	638	0.151	1.593	-1.457	0.901	2.855	0.740	51.6
600S200-43	0.0451	33	0.492	1.67	2.683	0.894	2.335	0.268	0.739	2.632	0.868	17.16	14.88	1415	1240	0.334	2.033	-1.446	0.894	2.844	0.742	51.4
600S200-54	0.0566	33	0.613	2.09	3.320	1.107	2.327	0.329	0.732	3.304	1.101	23.96	21.30	2740	1890	0.655	2.493	-1.432	0.887	2.829	0.744	51.3
600S200-54	0.0566	50	0.613	2.09	3.320	1.107	2.327	0.329	0.732	3.139	1.007	30.16	26.31	2822	1947	0.655	2.493	-1.432	0.887	2.829	0.744	41.6
600S200-68	0.0713	50	0.764	2.60	4.102	1.367	2.316	0.400	0.723	4.034	1.332	39.86	35.48	5352	2880	1.295	3.047	-1.415	0.878	2.809	0.746	41.4
600S200-97	0.1017	50	1.067	3.63	5.614	1.871	2.293	0.530	0.705	5.586	1.862	64.24	60.86	10472	3805	3.679	4.080	-1.378	0.859	2.767	0.752	41.2
600S200-118	0.1242	50	1.283	4.36	6.643	2.214	2.276	0.612	0.691	6.611	2.204	78.09	77.88	12526	3622	6.595	4.753	-1.351	0.845	2.736	0.756	41.1
600S250-43	0.0451	33	0.537	1.83	3.083	1.028	2.396	0.458	0.923	2.865	0.909	17.97	15.72	1415	1240	0.364	3.411	-1.874	1.136	3.179	0.652	62.4
600S250-54	0.0566	33	0.670	2.28	3.820	1.273	2.389	0.562	0.917	3.597	1.149	22.71	21.21	2740	1890	0.715	4.194	-1.860	1.129	3.163	0.654	62.3
600S250-54	0.0566	50	0.670	2.28	3.820	1.273	2.389	0.562	0.917	3.412	1.054	31.56	27.70	2822	1947	0.715	4.194	-1.860	1.129	3.163	0.654	50.5
600S250-68	0.0713	50	0.836	2.84	4.728	1.576	2.379	0.688	0.908	4.358	1.373	41.10	37.61	5352	2880	1.416	5.145	-1.842	1.119	3.142	0.657	50.4
600S250-97	0.1017	50	1.169	3.98	6.498	2.166	2.358	0.923	0.889	6.324	2.068	61.92	59.18	10472	3805	4.030	6.947	-1.803	1.100	3.099	0.661	50.2
600S250-118	0.1242	50	1.407	4.79	7.715	2.572	2.342	1.076	0.875	7.669	2.552	76.42	75.38	12526	3622	7.234	8.142	-1.775	1.085	3.066	0.665	46.7
600S300-54	0.0566	33	0.726	2.47	4.320	1.440	2.439	0.875	1.098	3.873	1.196	23.64	22.13	2740	1890	0.775	6.452	-2.299	1.372	3.527	0.575	72.8
600S300-54	0.0566	50	0.726	2.47	4.320	1.440	2.439	0.875	1.098	3.646	1.086	32.51	28.67	2822	1947	0.775	6.452	-2.299	1.372	3.527	0.575	59.1
600S300-68	0.0713	50	0.907	3.09	5.355	1.785	2.430	1.075	1.089	4.684	1.425	42.66	39.14	5352	2880	1.537	7.937	-2.280	1.363	3.506	0.577	58.9
600S300-97	0.1017	50	1.271	4.32	7.383	2.461	2.410	1.454	1.070	6.986	2.237	66.97	62.32	10472	3805	4.3						

Section Properties

Structural (S) Steel Section Properties

Member	Design Thickness (in)	F _y (ksi)	Gross Properties							Effective Properties						Torsional Properties						
			Area (in ²)	Weight (lb/ft)	I _x (in ⁴)	S _x (in ³)	R _x (in)	I _y (in ⁴)	R _y (in)	I _x (in ⁴)	S _x (in ³)	M _a (in-k)	M _{ad} (in-k)	V _{ag} (lb)	V _{a,net} (lb)	Jx1000 (in ⁴)	C _w (in ⁶)	X _o (in)	m (in)	R _o (in)	β	L _u (in)
800S350-54	0.0566	33	0.938	3.19	9.685	2.421	3.213	1.646	1.324	8.918	2.112	41.73	37.14	2091	2091	1.002	22.897	-2.766	1.668	4.442	0.612	90.0
800S350-54	0.0566	50	0.938	3.19	9.685	2.421	3.213	1.646	1.324	8.209	1.828	54.74	48.11	2091	2091	1.002	22.897	-2.766	1.668	4.442	0.612	73.1
800S350-68	0.0713	50	1.174	4.00	12.048	3.012	3.203	2.034	1.316	10.982	2.580	77.24	65.96	4220	3367	1.990	28.308	-2.748	1.658	4.421	0.614	72.9
800S350-97	0.1017	50	1.652	5.62	16.741	4.185	3.183	2.784	1.298	15.780	3.778	113.10	105.79	10888	5940	5.696	38.834	-2.710	1.639	4.378	0.617	72.7
800S350-118	0.1242	50	1.997	6.79	20.045	5.011	3.168	3.296	1.285	19.583	4.806	143.88	136.67	16239	7117	10.267	46.068	-2.682	1.624	4.346	0.619	68.9
1000S162-43 ¹	0.0451	33	0.627	2.13	8.028	1.606	3.577	0.168	0.518	7.155	1.271	20.97	18.12	836	669	0.425	3.430	-0.823	0.545	3.707	0.951	38.8
1000S162-54	0.0566	33	0.783	2.66	9.954	1.991	3.566	0.204	0.511	9.205	1.694	33.47	29.91	1660	1660	0.836	4.198	-0.812	0.538	3.693	0.952	38.5
1000S162-54	0.0566	50	0.783	2.66	9.954	1.991	3.566	0.204	0.511	8.706	1.531	45.83	38.68	1660	1660	0.836	4.198	-0.812	0.538	3.693	0.952	31.3
1000S162-68	0.0713	50	0.978	3.33	12.330	2.466	3.550	0.247	0.502	11.467	2.122	63.53	53.74	3345	3345	1.658	5.121	-0.798	0.531	3.673	0.953	31.0
1000S162-97	0.1017	50	1.372	4.67	16.974	3.395	3.517	0.320	0.483	16.628	3.254	97.44	87.70	9862	7175	4.731	6.827	-0.768	0.514	3.632	0.955	30.4
1000S162-118	0.1242	50	1.655	5.63	20.177	4.035	3.491	0.364	0.469	20.142	4.028	130.76	120.56	16239	9539	8.511	7.924	-0.746	0.502	3.601	0.957	30.0
1000S200-43 ¹	0.0451	33	0.672	2.29	9.088	1.818	3.676	0.309	0.677	8.094	1.440	23.76	21.21	836	669	0.456	6.236	-1.147	0.743	3.910	0.914	49.3
1000S200-54	0.0566	33	0.839	2.86	11.282	2.256	3.666	0.378	0.671	10.552	1.958	38.69	34.77	1660	1660	0.896	7.665	-1.135	0.737	3.896	0.915	49.1
1000S200-54	0.0566	50	0.839	2.86	11.282	2.256	3.666	0.378	0.671	9.592	1.661	49.72	45.06	1660	1660	0.896	7.665	-1.135	0.737	3.896	0.915	39.8
1000S200-68	0.0713	50	1.050	3.57	13.999	2.800	3.652	0.460	0.662	12.949	2.389	71.52	62.15	3345	3345	1.779	9.401	-1.120	0.729	3.877	0.917	39.6
1000S200-97	0.1017	50	1.474	5.01	19.343	3.869	3.622	0.610	0.643	19.002	3.726	111.57	100.50	9862	7175	5.082	12.679	-1.088	0.711	3.836	0.920	39.0
1000S200-118	0.1242	50	1.779	6.05	23.060	4.612	3.600	0.704	0.629	23.025	4.605	149.43	137.74	16239	9539	9.149	14.848	-1.064	0.699	3.806	0.922	38.7
1000S250-43 ¹	0.0451	33	0.717	2.44	10.205	2.041	3.771	0.531	0.860	8.838	1.579	26.06	22.43	836	669	0.486	10.481	-1.518	0.965	4.155	0.867	60.7
1000S250-54	0.0566	33	0.896	3.05	12.681	2.536	3.762	0.653	0.854	11.825	2.253	44.53	36.94	1660	1660	0.957	12.922	-1.505	0.958	4.141	0.868	60.5
1000S250-54	0.0566	50	0.896	3.05	12.681	2.536	3.762	0.653	0.854	10.477	1.822	54.55	47.66	1660	1660	0.957	12.922	-1.505	0.958	4.141	0.868	49.1
1000S250-68	0.0713	50	1.121	3.81	15.756	3.151	3.749	0.799	0.844	14.469	2.736	81.93	65.86	3345	3345	1.899	15.909	-1.488	0.950	4.121	0.870	48.8
1000S250-97	0.1017	50	1.576	5.36	21.834	4.367	3.722	1.073	0.825	21.323	4.202	125.80	107.14	9862	7175	5.433	21.632	-1.454	0.932	4.080	0.873	45.6
1000S250-118	0.1242	50	1.904	6.48	26.088	5.218	3.702	1.251	0.811	25.978	5.185	155.25	139.63	16239	9539	9.788	25.490	-1.428	0.918	4.050	0.876	44.8
1000S300-54	0.0566	33	0.953	3.24	14.080	2.816	3.845	1.024	1.037	12.399	2.272	44.90	38.27	1660	1660	1.017	19.888	-1.892	1.185	4.409	0.816	71.5
1000S300-54	0.0566	50	0.953	3.24	14.080	2.816	3.845	1.024	1.037	10.934	1.832	54.85	49.12	1660	1660	1.017	19.888	-1.892	1.185	4.409	0.816	58.0
1000S300-68	0.0713	50	1.192	4.06	17.513	3.503	3.833	1.258	1.027	15.128	2.746	82.23	68.23	3345	3345	2.020	24.551	-1.874	1.176	4.389	0.818	57.8
1000S300-97	0.1017	50	1.677	5.71	24.325	4.865	3.808	1.703	1.007	23.161	4.490	134.43	111.66	9862	7175	5.783	33.570	-1.838	1.158	4.347	0.821	57.4
1000S300-118	0.1242	50	2.028	6.90	29.117	5.823	3.789	1.998	0.993	28.392	5.586	167.24	146.34	16239	9539	10.427	39.725	-1.811	1.144	4.316	0.824	53.8
1000S350-54	0.0566	33	1.052	3.58	16.223	3.245	3.928	1.768	1.297	14.690	2.741	54.16	47.21	1660	1660	1.123	36.575	-2.546	1.566	4.857	0.725	88.9
1000S350-54	0.0566	50	1.052	3.58	16.223	3.245	3.928	1.768	1.297	13.185	2.267	67.88	60.89	1660	1660	1.123	36.575	-2.546	1.566	4.857	0.725	72.2
1000S350-68	0.0713	50	1.317	4.48	20.209	4.042	3.917	2.185	1.288	18.175	3.379	101.16	83.89	3345	3345	2.232	45.277	-2.529	1.557	4.837	0.727	72.0
1000S350-97	0.1017	50	1.855	6.31	28.154	5.631	3.895	2.992	1.270	26.580	5.110	153.00	135.86	9862	7175	6.397	62.280	-2.492	1.538	4.795	0.730	71.6
1000S350-118	0.1242	50	2.245	7.64	33.780	6.756	3.879	3.544	1.256	32.995	6.486	194.19	176.74	16239	9539	11.544	74.030	-2.465	1.524	4.764	0.732	67.8
1200S162-54 ¹	0.0566	33	0.896	3.05	15.736	2.623	4.191	0.212	0.486	13.939	2.064	34.05	29.26	1377	1102	0.957	6.340	-0.732	0.493	4.282	0.971	37.5
1200S162-54 ¹	0.0566	50	0.896	3.05	15.736	2.623	4.191	0.212	0.486	13.135	1.870	46.76	37.52	1377	1102	0.957	6.340	-0.732	0.493	4.282	0.971	30.5
1200S162-68	0.0713	50	1.121	3.81	19.526	3.254	4.174	0.255	0.477	17.405	2.591	77.58	63.20	2770	2770	1.899	7.739	-0.719	0.485	4.262	0.972	30.2
1200S162-97	0.1017	50	1.576	5.36	26.977	4.496	4.138	0.332	0.459	25.642	4.056	121.43	105.38	8145	7410	5.433	10.331	-0.691	0.470	4.220	0.973	29.5
1200S162-118	0.1242	50	1.904	6.48	32.158	5.360	4.110	0.377	0.445	31.530	5.151	154.22	138.87	14982	11034	9.788	12.002	-0.670	0.459	4.188	0.974	29.0
1200S200-54 ¹	0.0566	33	0.953	3.24	17.668	2.945	4.307	0.394	0.643	15.922	2.383	39.32	34.44	1377	1102	1.017	11.550	-1.032	0.681	4.475	0.947	48.0
1200S200-54 ¹	0.0566	50	0.953	3.24	17.668	2.945	4.307	0.394	0.643	14.415	2.031	50.77	44.30	1377	1102	1.017	11.550	-1.032	0.681	4.475	0.947	39.0
1200S200-68	0.0713	50	1.192	4.06	21.955	3.659	4.291	0.479	0.634	19.554	2.911	87.15	73.93	2770								

Section Properties

Structural (S) Stud Section Properties

Member	Design Thickness		Gross Properties							Effective Properties						Torsional Properties							L _u (in)
	(in)	F _y (ksi)	Area (in ²)	Weight (lb/ft)	I _x (in ⁴)	S _x (in ³)	R _x (in)	I _y (in ⁴)	R _y (in)	I _x (in ⁴)	S _x (in ³)	M _a (in-k)	M _{ad} (in-k)	V _a (lb)	V _a _{net} (lb)	Jx1000 (in ⁴)	C _w (in ⁶)	X _o (in)	m (in)	R _o (in)	β		
1600S250-68 ¹	0.0713	50	1.549	5.27	49.832	6.229	5.673	0.889	0.758	38.820	4.020	100.50	84.94	2062	1649	2.624	46.230	-1.167	0.778	5.841	0.960	46.5	
1600S250-97	0.1017	50	2.186	7.44	69.503	8.688	5.639	1.193	0.739	61.516	6.888	206.22	172.62	6042	6042	7.536	63.082	-1.138	0.762	5.800	0.962	45.9	
1600S250-118	0.1242	50	2.649	9.01	83.459	10.432	5.613	1.390	0.724	78.257	9.167	274.47	231.24	11086	11086	13.620	74.524	-1.116	0.750	5.769	0.963	45.4	
1600S300-68 ¹	0.0713	50	1.620	5.51	54.355	6.794	5.793	1.411	0.933	40.699	4.143	103.58	89.73	2062	1649	2.745	71.608	-1.494	0.981	6.055	0.939	55.8	
1600S300-97	0.1017	50	2.288	7.78	75.929	9.491	5.761	1.910	0.914	65.843	7.291	218.29	182.59	6042	6042	7.887	98.275	-1.463	0.964	6.014	0.941	55.1	
1600S300-118	0.1242	50	2.773	9.43	91.284	11.411	5.738	2.240	0.899	84.132	9.756	292.10	244.86	11086	11086	14.258	116.606	-1.439	0.951	5.983	0.942	54.7	
1600S350-68 ¹	0.0713	50	1.745	5.94	61.641	7.705	5.944	2.490	1.195	48.901	5.104	127.59	112.58	2062	1649	2.957	127.370	-2.055	1.322	6.402	0.897	69.7	
1600S350-97	0.1017	50	2.466	8.39	86.296	10.787	5.916	3.410	1.176	74.856	8.285	248.05	223.83	6042	6042	8.501	175.895	-2.022	1.304	6.362	0.899	69.1	
1600S350-118	0.1242	50	2.990	10.17	103.924	12.990	5.895	4.039	1.162	96.504	11.236	336.42	296.35	11086	11086	15.376	209.692	-1.998	1.291	6.332	0.900	68.8	

¹ Web-height to thickness ratio exceeds 200. Web Stiffeners are required at all support points and concentrated loads.

² When web height-to thickness ratio exceeds 260, or flange width-to-thickness ratio exceeds 60, effective properties are not calculated (limitations in AISI section B4.1).

See Section Properties Table Notes

Section Properties

(T) Track Section Properties

Member	Design Thickness (in)	F _y (ksi)	Gross Properties							Effective Properties				Torsional Properties					
			Area (in ²)	Weight (lb/ft)	I _x (in ⁴)	S _x (in ³)	R _x (in)	I _y (in ⁴)	R _y (in)	I _x (in ⁴)	S _x (in ³)	M _a (in-k)	V _a (lb)	Jx1000 (in ⁴)	C _w (in ⁶)	X _o (in)	m (in)	R _o (in)	β
162T125-18	0.0188	33	0.078	0.26	0.042	0.048	0.733	0.013	0.411	0.027	0.025	0.42	302	0.0091	0.007	-0.876	0.503	1.215	0.479
162T125-27	0.0283	33	0.117	0.40	0.063	0.072	0.735	0.020	0.410	0.046	0.044	0.87	541	0.0312	0.010	-0.872	0.501	1.211	0.482
162T125-30	0.0312	33	0.129	0.44	0.070	0.079	0.735	0.022	0.409	0.052	0.051	1.00	597	0.0417	0.012	-0.870	0.500	1.210	0.483
162T125-33	0.0346	33	0.143	0.49	0.077	0.087	0.736	0.024	0.408	0.060	0.059	1.16	663	0.0569	0.013	-0.868	0.499	1.209	0.484
250T125-18	0.0188	33	0.094	0.32	0.104	0.079	1.052	0.015	0.400	0.071	0.044	0.73	245	0.0111	0.018	-0.767	0.460	1.362	0.682
250T125-27	0.0283	33	0.141	0.48	0.157	0.119	1.053	0.022	0.398	0.120	0.079	1.56	685	0.0378	0.027	-0.763	0.457	1.360	0.685
250T125-30	0.0312	33	0.156	0.53	0.173	0.131	1.053	0.025	0.397	0.135	0.090	1.77	833	0.0506	0.030	-0.762	0.456	1.359	0.686
250T125-33	0.0346	33	0.173	0.59	0.192	0.145	1.054	0.027	0.397	0.154	0.103	2.04	1024	0.0690	0.033	-0.760	0.456	1.358	0.687
250T125-43	0.0451	33	0.225	0.77	0.250	0.188	1.055	0.035	0.395	0.215	0.148	2.92	1356	0.1526	0.042	-0.755	0.453	1.356	0.690
250T125-54	0.0566	33	0.282	0.96	0.318	0.236	1.062	0.043	0.392	0.290	0.204	4.03	1692	0.3015	0.054	-0.749	0.449	1.357	0.696
250T125-54	0.0566	50	0.282	0.96	0.318	0.236	1.062	0.043	0.392	0.276	0.189	5.66	2563	0.3015	0.054	-0.749	0.449	1.357	0.696
250T125-68	0.0713	33	0.355	1.21	0.409	0.297	1.072	0.054	0.389	0.396	0.283	5.58	2112	0.6022	0.069	-0.740	0.444	1.360	0.704
250T125-68	0.0713	50	0.355	1.21	0.409	0.297	1.072	0.054	0.389	0.379	0.263	7.89	3199	0.6022	0.069	-0.740	0.444	1.360	0.704
250T150-27	0.0283	33	0.156	0.53	0.181	0.137	1.078	0.037	0.486	0.129	0.082	1.61	685	0.0415	0.044	-0.976	0.575	1.534	0.595
250T150-30	0.0312	33	0.172	0.58	0.200	0.151	1.078	0.040	0.486	0.145	0.093	1.84	833	0.0557	0.049	-0.975	0.574	1.533	0.595
250T150-33	0.0346	33	0.190	0.65	0.221	0.167	1.079	0.045	0.485	0.166	0.107	2.11	1024	0.0759	0.054	-0.973	0.573	1.532	0.596
250T150-43	0.0451	33	0.248	0.84	0.289	0.217	1.080	0.058	0.483	0.232	0.154	3.04	1356	0.1679	0.070	-0.968	0.570	1.529	0.599
250T150-54	0.0566	33	0.311	1.06	0.368	0.273	1.088	0.072	0.481	0.316	0.214	4.24	1692	0.3317	0.089	-0.961	0.566	1.530	0.605
250T150-54	0.0566	50	0.311	1.06	0.368	0.273	1.088	0.072	0.481	0.299	0.198	5.92	2563	0.3317	0.089	-0.961	0.566	1.530	0.605
250T150-68	0.0713	33	0.391	1.33	0.472	0.344	1.099	0.089	0.478	0.435	0.301	5.95	2112	0.6627	0.114	-0.953	0.561	1.531	0.613
250T150-68	0.0713	50	0.391	1.33	0.472	0.344	1.099	0.089	0.478	0.413	0.278	8.32	3199	0.6627	0.114	-0.953	0.561	1.531	0.613
250T200-33	0.0346	33	0.225	0.76	0.280	0.212	1.117	0.097	0.658	0.185	0.113	2.23	1024	0.0897	0.118	-1.418	0.813	1.922	0.455
250T200-43	0.0451	33	0.293	1.00	0.366	0.275	1.119	0.126	0.656	0.262	0.163	3.22	1356	0.1985	0.153	-1.413	0.810	1.918	0.457
250T200-54	0.0566	33	0.367	1.25	0.466	0.346	1.127	0.157	0.654	0.360	0.229	4.53	1692	0.3921	0.195	-1.405	0.806	1.917	0.462
250T200-54	0.0566	50	0.367	1.25	0.466	0.346	1.127	0.157	0.654	0.338	0.210	6.28	2563	0.3921	0.195	-1.405	0.806	1.917	0.462
250T200-68	0.0713	33	0.462	1.57	0.600	0.437	1.139	0.196	0.652	0.501	0.326	6.45	2112	0.7835	0.251	-1.396	0.800	1.916	0.469
250T200-68	0.0713	50	0.462	1.57	0.600	0.437	1.139	0.196	0.652	0.471	0.298	8.91	3199	0.7835	0.251	-1.396	0.800	1.916	0.469
350T125-18	0.0188	33	0.113	0.38	0.220	0.121	1.395	0.017	0.382	0.141	0.062	1.02	173	0.0133	0.038	-0.675	0.418	1.596	0.821
350T125-27	0.0283	33	0.170	0.58	0.331	0.182	1.396	0.025	0.381	0.262	0.128	2.53	590	0.0453	0.057	-0.670	0.416	1.595	0.823
350T125-30	0.0312	33	0.187	0.64	0.365	0.200	1.396	0.027	0.380	0.294	0.145	2.87	790	0.0607	0.063	-0.669	0.415	1.594	0.824
350T125-33	0.0346	33	0.207	0.71	0.405	0.222	1.397	0.030	0.379	0.333	0.166	3.27	1024	0.0828	0.070	-0.668	0.414	1.594	0.824
350T125-43	0.0451	33	0.270	0.92	0.528	0.288	1.398	0.038	0.377	0.460	0.234	4.61	1740	0.1832	0.090	-0.663	0.412	1.592	0.826
350T125-54	0.0566	33	0.339	1.15	0.668	0.361	1.404	0.048	0.375	0.615	0.318	6.28	2392	0.3619	0.114	-0.658	0.408	1.595	0.830
350T125-54	0.0566	50	0.339	1.15	0.668	0.361	1.404	0.048	0.375	0.589	0.298	8.92	3372	0.3619	0.114	-0.658	0.408	1.595	0.830
350T125-68	0.0713	33	0.427	1.45	0.851	0.454	1.412	0.059	0.372	0.827	0.434	8.57	2994	0.7231	0.144	-0.650	0.403	1.599	0.835
350T125-68	0.0713	50	0.427	1.45	0.851	0.454	1.412	0.059	0.372	0.795	0.408	12.22	4536	0.7231	0.144	-0.650	0.403	1.599	0.835
350T125-97	0.1017	33	0.608	2.07	1.243	0.645	1.430	0.081	0.366	1.244	0.645	14.57	4213	2.0960	0.209	-0.636	0.394	1.607	0.844
350T125-97	0.1017	50	0.608	2.07	1.243	0.645	1.430	0.081	0.366	1.244	0.645	21.51	6383	2.0960	0.209	-0.636	0.394	1.607	0.844
350T150-27	0.0283	33	0.184	0.63	0.377	0.207	1.432	0.041	0.470	0.280	0.133	2.62	590	0.0491	0.094	-0.869	0.529	1.739	0.751
350T150-30	0.0312	33	0.203	0.69	0.416	0.228	1.432	0.045	0.470	0.315	0.150	2.97	790	0.0658	0.103	-0.867	0.528	1.739	0.751
350T150-33	0.0346	33	0.225	0.76	0.461	0.253	1.432	0.049	0.469	0.357	0.172	3.39	1024	0.0897	0.114	-0.866	0.527	1.738	0.752
350T150-43	0.0451	33	0.293	1.00	0.601	0.329	1.433	0.064	0.467	0.495	0.243	4.81	1740	0.1985	0.148	-0.861	0.525	1.736	0.754
350T150-54	0.0566	33	0.367	1.25	0.762	0.412	1.440	0.079	0.465	0.665	0.333	6.59	2392	0.3921	0.187	-0.855	0.521	1.738	0.758
350T150-54	0.0566	50	0.367	1.25	0.762	0.412	1.440	0.079	0.465	0.634	0.311	9.30	3372	0.3921	0.187	-0.855	0.521	1.738	0.758
350T150-68	0.0713	33	0.462	1.57	0.972	0.518	1.450	0.099	0.462	0.901	0.460	9.10	2994	0.7835	0.238	-0.847	0.516	1.742	0.763
350T150-68	0.0713	50	0.462	1.57	0.972	0.518	1.450	0.099	0.462	0.861	0.429	12.85	4536	0.7835	0.238	-0.847	0.516	1.742	0.763
350T150-97	0.1017	33	0.659	2.24	1.423	0.738	1.469	0.137	0.456	1.423	0.738	15.72	4213	2.2713	0.346	-0.831	0.506	1.749	0.774
350T150-97	0.1017	50	0.659	2.24	1.423	0.738	1.469	0.137	0.456	1.381	0.704	21.08	6383	2.2713	0.346	-0.831	0.506	1.749	0.774
350T200-33	0.0346	33	0.259	0.88	0.574	0.315	1.488	0.108	0.646	0.398	0.181	3.58	1024	0.1035	0.249	-1.285	0.761	2.069	0.614
350T200-43	0.0451	33	0.338	1.15	0.749	0.409	1.489	0.140	0.645	0.554	0.258	5.10	1740	0.2291	0.323	-1.280	0.758	2.067	0.616
350T200-54	0.0566	33	0.424	1.44	0.949	0.513	1.497	0.175	0.642	0.750	0.356	7.03	2392	0.4526	0.409	-1.273	0.754	2.067	0.621
350T200-54	0.0566	50	0.424	1.44	0.949	0.513	1.497	0.175	0.642	0.711	0.330	9.87	3372	0.4526	0.409	-1.273	0.754	2.067	0.621
350T200-68	0.0713	33	0.534	1.82	1.213	0.647	1.508	0.218	0.639	1.028	0.498	9.84	2994	0.9043	0.522	-1.264	0.749	2.069	0.627
350T200-68	0.0713	50	0.534	1.82	1.213	0.647	1.508	0.218	0.639	0.974	0.460	13.76	4536	0.9043	0.522	-1.264	0.749	2.069	0.627
350T200-97	0.1017	33	0.761	2.59	1.781	0.924	1.530	0.305	0.633	1.673	0.835	16.50	4213	2.6219	0.765	-1.247	0.738	2.073	0.638
350T200-97	0.1017	50	0.761	2.59	1.781	0.924	1.530	0.305	0.633	1.593	0.773	23.14	6383	2.6219	0.765	-1.247	0.738	2.073	0.638
362T125-18	0.0188	33	0.115	0.39	0.238	0.127	1.437	0.017	0.380	0.151	0.064	1.05	167	0.0136	0.042	-0.665	0.413	1.628	0.833
362T125-27																			

Section Properties

(T) Track Section Properties

Member	Design Thickness (in)	F _y (ksi)	Gross Properties							Effective Properties				Torsional Properties					
			Area (in ²)	Weight (lb/ft)	I _x (in ⁴)	S _x (in ³)	R _x (in)	I _y (in ⁴)	R _y (in)	I _x (in ⁴)	S _x (in ³)	M _a (in-k)	V _a (lb)	Jx1000 (in ⁴)	C _w (in ⁶)	X _o (in)	m (in)	R _o (in)	β
362T125-54	0.0566	50	0.346	1.18	0.723	0.378	1.445	0.048	0.373	0.638	0.313	9.36	3372	0.3695	0.123	-0.648	0.404	1.627	0.841
362T125-68	0.0713	33	0.436	1.48	0.921	0.475	1.454	0.060	0.370	0.895	0.455	8.98	3104	0.7382	0.156	-0.641	0.399	1.631	0.846
362T125-68	0.0713	50	0.436	1.48	0.921	0.475	1.454	0.060	0.370	0.861	0.428	12.82	4703	0.7382	0.156	-0.641	0.399	1.631	0.846
362T125-97	0.1017	33	0.621	2.11	1.344	0.675	1.471	0.082	0.364	1.344	0.675	15.25	4370	2.1398	0.226	-0.626	0.390	1.640	0.854
362T125-97	0.1017	50	0.621	2.11	1.344	0.675	1.471	0.082	0.364	1.344	0.675	22.49	6622	2.1398	0.226	-0.626	0.390	1.640	0.854
362T150-27	0.0283	33	0.187	0.64	0.408	0.217	1.475	0.041	0.468	0.304	0.140	2.76	569	0.0500	0.102	-0.857	0.524	1.769	0.765
362T150-30	0.0312	33	0.207	0.70	0.450	0.239	1.475	0.045	0.467	0.342	0.158	3.12	762	0.0670	0.112	-0.856	0.523	1.768	0.766
362T150-33	0.0346	33	0.229	0.78	0.499	0.264	1.475	0.050	0.467	0.387	0.181	3.57	1024	0.0914	0.124	-0.854	0.522	1.768	0.766
362T150-43	0.0451	33	0.298	1.02	0.650	0.344	1.476	0.064	0.465	0.536	0.256	5.05	1740	0.2023	0.160	-0.850	0.519	1.766	0.768
362T150-54	0.0566	33	0.374	1.27	0.823	0.431	1.483	0.080	0.462	0.719	0.350	6.91	2480	0.3997	0.202	-0.844	0.516	1.768	0.772
362T150-54	0.0566	50	0.374	1.27	0.823	0.431	1.483	0.080	0.462	0.687	0.326	9.77	3372	0.3997	0.202	-0.844	0.516	1.768	0.772
362T150-68	0.0713	33	0.471	1.60	1.050	0.542	1.493	0.100	0.460	0.975	0.482	9.53	3104	0.7986	0.257	-0.836	0.511	1.771	0.777
362T150-68	0.0713	50	0.471	1.60	1.050	0.542	1.493	0.100	0.460	0.931	0.450	13.47	4703	0.7986	0.257	-0.836	0.511	1.771	0.777
362T150-97	0.1017	33	0.672	2.28	1.535	0.771	1.512	0.138	0.453	1.536	0.771	16.41	4370	2.3152	0.374	-0.820	0.501	1.779	0.787
362T150-97	0.1017	50	0.672	2.28	1.535	0.771	1.512	0.138	0.453	1.491	0.736	22.04	6622	2.3152	0.374	-0.820	0.501	1.779	0.787
362T200-33	0.0346	33	0.264	0.90	0.619	0.329	1.533	0.110	0.645	0.432	0.191	3.76	1024	0.1052	0.269	-1.270	0.754	2.092	0.631
362T200-43	0.0451	33	0.343	1.17	0.808	0.427	1.534	0.142	0.643	0.600	0.271	5.35	1740	0.2329	0.350	-1.265	0.752	2.090	0.633
362T200-54	0.0566	33	0.431	1.47	1.024	0.536	1.542	0.177	0.640	0.811	0.373	7.37	2480	0.4601	0.442	-1.259	0.748	2.091	0.638
362T200-54	0.0566	50	0.431	1.47	1.024	0.536	1.542	0.177	0.640	0.770	0.346	10.37	3372	0.4601	0.442	-1.259	0.748	2.091	0.638
362T200-68	0.0713	33	0.543	1.85	1.308	0.675	1.552	0.221	0.638	1.110	0.521	10.30	3104	0.9194	0.564	-1.250	0.743	2.093	0.643
362T200-68	0.0713	50	0.543	1.85	1.308	0.675	1.552	0.221	0.638	1.053	0.482	14.42	4703	0.9194	0.564	-1.250	0.743	2.093	0.643
362T200-97	0.1017	33	0.773	2.63	1.917	0.963	1.575	0.308	0.632	1.803	0.872	17.23	4370	2.6658	0.825	-1.232	0.732	2.097	0.655
362T200-97	0.1017	50	0.773	2.63	1.917	0.963	1.575	0.308	0.632	1.716	0.808	24.18	6622	2.6658	0.825	-1.232	0.732	2.097	0.655
400T125-18 ¹	0.0188	33	0.122	0.42	0.298	0.145	1.562	0.017	0.374	0.186	0.070	1.16	151	0.0144	0.052	-0.637	0.400	1.727	0.864
400T125-27	0.0283	33	0.184	0.63	0.449	0.217	1.562	0.025	0.372	0.360	0.156	3.08	515	0.0491	0.078	-0.633	0.398	1.726	0.866
400T125-30	0.0312	33	0.203	0.69	0.495	0.239	1.563	0.028	0.371	0.404	0.177	3.49	689	0.0658	0.085	-0.632	0.397	1.726	0.866
400T125-33	0.0346	33	0.225	0.76	0.549	0.265	1.563	0.031	0.371	0.457	0.201	3.98	939	0.0897	0.095	-0.630	0.396	1.725	0.867
400T125-43	0.0451	33	0.293	1.00	0.716	0.344	1.564	0.040	0.369	0.628	0.282	5.58	1740	0.1985	0.122	-0.626	0.394	1.724	0.868
400T125-54	0.0566	33	0.367	1.25	0.904	0.431	1.569	0.049	0.366	0.836	0.382	7.54	2740	0.3921	0.154	-0.621	0.390	1.727	0.871
400T125-54	0.0566	50	0.367	1.25	0.904	0.431	1.569	0.049	0.366	0.803	0.359	10.76	3372	0.3921	0.154	-0.621	0.390	1.727	0.871
400T125-68	0.0713	33	0.462	1.57	1.151	0.541	1.577	0.061	0.364	1.119	0.519	10.25	3435	0.7835	0.194	-0.614	0.386	1.731	0.874
400T125-68	0.0713	50	0.462	1.57	1.151	0.541	1.577	0.061	0.364	1.078	0.490	14.66	5205	0.7835	0.194	-0.614	0.386	1.731	0.874
400T125-97	0.1017	33	0.659	2.24	1.674	0.768	1.594	0.084	0.358	1.674	0.769	17.36	4842	2.2713	0.280	-0.600	0.377	1.740	0.881
400T125-97	0.1017	50	0.659	2.24	1.674	0.768	1.594	0.084	0.358	1.674	0.769	25.54	7337	2.2713	0.280	-0.600	0.377	1.740	0.881
400T150-27	0.0283	33	0.198	0.67	0.509	0.246	1.602	0.042	0.461	0.373	0.154	3.05	515	0.0529	0.127	-0.824	0.509	1.860	0.804
400T150-30	0.0312	33	0.218	0.74	0.561	0.271	1.603	0.046	0.461	0.431	0.183	3.61	689	0.0708	0.140	-0.823	0.508	1.860	0.804
400T150-33	0.0346	33	0.242	0.82	0.622	0.300	1.603	0.051	0.460	0.488	0.209	4.12	939	0.0966	0.155	-0.821	0.507	1.859	0.805
400T150-43	0.0451	33	0.315	1.07	0.811	0.390	1.604	0.066	0.458	0.674	0.294	5.81	1740	0.2138	0.200	-0.817	0.504	1.857	0.807
400T150-54	0.0566	33	0.396	1.35	1.026	0.489	1.610	0.082	0.456	0.901	0.400	7.90	2740	0.4223	0.252	-0.811	0.501	1.860	0.810
400T150-54	0.0566	50	0.396	1.35	1.026	0.489	1.610	0.082	0.456	0.861	0.375	11.22	3372	0.4223	0.252	-0.811	0.501	1.860	0.810
400T150-68	0.0713	33	0.498	1.69	1.306	0.615	1.619	0.102	0.453	1.215	0.549	10.85	3435	0.8439	0.320	-0.804	0.496	1.864	0.814
400T150-68	0.0713	50	0.498	1.69	1.306	0.615	1.619	0.102	0.453	1.163	0.514	15.40	5205	0.8439	0.320	-0.804	0.496	1.864	0.814
400T150-97	0.1017	33	0.710	2.41	1.904	0.874	1.638	0.142	0.447	1.904	0.874	18.56	4842	2.4466	0.463	-0.788	0.487	1.872	0.823
400T150-97	0.1017	50	0.710	2.41	1.904	0.874	1.638	0.142	0.447	1.850	0.836	25.02	7337	2.4466	0.463	-0.788	0.487	1.872	0.823
400T200-33	0.0346	33	0.277	0.94	0.768	0.371	1.666	0.113	0.639	0.543	0.220	4.35	939	0.1104	0.336	-1.229	0.737	2.167	0.678
400T200-43	0.0451	33	0.360	1.23	1.002	0.482	1.668	0.146	0.637	0.753	0.311	6.15	1740	0.2443	0.436	-1.224	0.734	2.164	0.680
400T200-54	0.0566	33	0.452	1.54	1.268	0.604	1.675	0.182	0.635	1.013	0.427	8.44	2740	0.4828	0.551	-1.217	0.730	2.166	0.684
400T200-54	0.0566	50	0.452	1.54	1.268	0.604	1.675	0.182	0.635	0.964	0.398	11.90	3372	0.4828	0.551	-1.217	0.730	2.166	0.684
400T200-68	0.0713	33	0.569	1.94	1.617	0.761	1.685	0.227	0.632	1.379	0.593	11.72	3435	0.9647	0.702	-1.209	0.725	2.168	0.689
400T200-68	0.0713	50	0.569	1.94	1.617	0.761	1.685	0.227	0.632	1.311	0.550	16.47	5205	0.9647	0.702	-1.209	0.725	2.168	0.689
400T200-97	0.1017	33	0.811	2.76	2.364	1.085	1.707	0.318	0.626	2.225	0.985	19.47	4842	2.7973	1.022	-1.192	0.715	2.174	0.699
400T200-97	0.1017	50	0.811	2.76	2.364	1.085	1.707	0.318	0.626	2.122	0.915	27.41	7337	2.7973	1.022	-1.192	0.715	2.174	0.699
550T125-27	0.0283	33	0.226	0.77	0.948	0.336	2.046	0.027	0.348	0.664	0.192	3.79	372	0.0604	0.160	-0.543	0.352	2.146	0.936
550T125-30	0.0312	33	0.250	0.85	1.045	0.371	2.047	0.030	0.347	0.767	0.227	4.48	499	0.0810	0.176	-0.542	0.351	2.145	0.936
550T125-33	0.0346	33	0.277	0.94	1.159	0.411	2.047	0.033	0.346	0.891	0.270	5.33	680	0.1104	0.195	-0.541	0.350	2.145	0.936
550T125-43	0.0451	33	0.360	1.23	1.510	0.534	2.047	0.043	0.344	1.294	0.417	8.24	1504	0.2443	0.252	-0.537	0.348	2.144	0.937
550T125-54	0.0566	33	0.452	1.54	1.904	0.668	2.052	0.053	0.342	1.770	0.598	11.82	2740	0.4828	0.3				

Section Properties

(T) Track Section Properties

Member	Design Thickness (in)	F _y (ksi)	Gross Properties							Effective Properties				Torsional Properties					
			Area (in ²)	Weight (lb/ft)	I _x (in ⁴)	S _x (in ³)	R _x (in)	I _y (in ⁴)	R _y (in)	I _x (in ⁴)	S _x (in ³)	M _a (in-k)	V _a (lb)	Jx1000 (in ⁴)	C _w (in ⁶)	X _o (in)	m (in)	R _o (in)	β
550T150-27	0.0283	33	0.241	0.82	1.059	0.376	2.099	0.046	0.436	0.718	0.208	4.10	372	0.0642	0.263	-0.716	0.456	2.260	0.900
550T150-30	0.0312	33	0.265	0.90	1.168	0.414	2.099	0.050	0.435	0.842	0.252	4.97	499	0.0860	0.289	-0.715	0.455	2.259	0.900
550T150-33	0.0346	33	0.294	1.00	1.295	0.459	2.099	0.055	0.434	0.999	0.310	6.13	680	0.1173	0.320	-0.714	0.455	2.259	0.900
550T150-43	0.0451	33	0.383	1.30	1.688	0.596	2.100	0.072	0.432	1.436	0.469	9.26	1504	0.2596	0.414	-0.709	0.452	2.258	0.901
550T150-54	0.0566	33	0.480	1.63	2.129	0.747	2.105	0.089	0.430	1.899	0.629	12.43	2740	0.5130	0.519	-0.704	0.449	2.261	0.903
550T150-54	0.0566	50	0.480	1.63	2.129	0.747	2.105	0.089	0.430	1.828	0.595	17.83	2980	0.5130	0.519	-0.704	0.449	2.261	0.903
550T150-68	0.0713	33	0.605	2.06	2.700	0.939	2.113	0.111	0.427	2.532	0.852	16.83	4348	1.0251	0.655	-0.698	0.445	2.266	0.905
550T150-68	0.0713	50	0.605	2.06	2.700	0.939	2.113	0.111	0.427	2.438	0.805	24.12	5352	1.0251	0.655	-0.698	0.445	2.266	0.905
550T150-97	0.1017	33	0.862	2.93	3.905	1.334	2.128	0.153	0.421	3.906	1.334	28.14	6730	2.9726	0.937	-0.684	0.436	2.275	0.909
550T150-97	0.1017	50	0.862	2.93	3.905	1.334	2.128	0.153	0.421	3.804	1.282	38.37	10197	2.9726	0.937	-0.684	0.436	2.275	0.909
550T200-33	0.0346	33	0.329	1.12	1.567	0.555	2.184	0.123	0.613	1.060	0.307	6.07	680	0.1311	0.694	-1.088	0.674	2.516	0.813
550T200-43	0.0451	33	0.428	1.46	2.044	0.722	2.185	0.160	0.611	1.590	0.496	9.80	1504	0.2902	0.900	-1.083	0.671	2.514	0.814
550T200-54	0.0566	33	0.537	1.83	2.579	0.905	2.191	0.199	0.609	2.113	0.670	13.23	2740	0.5734	1.133	-1.077	0.668	2.517	0.817
550T200-54	0.0566	50	0.537	1.83	2.579	0.905	2.191	0.199	0.609	2.027	0.631	18.88	2980	0.5734	1.133	-1.077	0.668	2.517	0.817
550T200-68	0.0713	33	0.676	2.30	3.275	1.139	2.201	0.248	0.606	2.840	0.916	18.09	4348	1.1459	1.434	-1.070	0.663	2.521	0.820
550T200-68	0.0713	50	0.676	2.30	3.275	1.139	2.201	0.248	0.606	2.718	0.859	25.72	5352	1.1459	1.434	-1.070	0.663	2.521	0.820
550T200-97	0.1017	33	0.964	3.28	4.747	1.621	2.219	0.347	0.600	4.492	1.487	29.39	6730	3.3232	2.067	-1.055	0.653	2.529	0.826
550T200-97	0.1017	50	0.964	3.28	4.747	1.621	2.219	0.347	0.600	4.306	1.395	41.76	10197	3.3232	2.067	-1.055	0.653	2.529	0.826
600T125-27 ¹	0.0283	33	0.241	0.82	1.169	0.381	2.204	0.028	0.340	0.803	0.211	3.48	341	0.0642	0.196	-0.519	0.339	2.290	0.949
600T125-30	0.0312	33	0.265	0.90	1.288	0.420	2.204	0.031	0.340	0.928	0.249	4.92	456	0.0860	0.215	-0.518	0.338	2.290	0.949
600T125-33	0.0346	33	0.294	1.00	1.429	0.465	2.205	0.034	0.339	1.080	0.297	5.87	622	0.1173	0.238	-0.516	0.337	2.289	0.949
600T125-43	0.0451	33	0.383	1.30	1.862	0.604	2.205	0.044	0.337	1.575	0.462	9.12	1377	0.2596	0.307	-0.513	0.335	2.289	0.950
600T125-54	0.0566	33	0.480	1.63	2.345	0.757	2.209	0.054	0.335	2.163	0.666	13.17	2728	0.5130	0.384	-0.508	0.332	2.292	0.951
600T125-54	0.0566	50	0.480	1.63	2.345	0.757	2.209	0.054	0.335	2.016	0.593	17.76	2728	0.5130	0.384	-0.508	0.332	2.292	0.951
600T125-68	0.0713	33	0.605	2.06	2.970	0.951	2.216	0.067	0.332	2.899	0.917	18.12	4348	1.0251	0.483	-0.503	0.329	2.296	0.952
600T125-68	0.0713	50	0.605	2.06	2.970	0.951	2.216	0.067	0.332	2.784	0.860	25.74	5352	1.0251	0.483	-0.503	0.329	2.296	0.952
600T125-97	0.1017	33	0.862	2.93	4.282	1.348	2.229	0.092	0.327	4.282	1.348	30.44	7359	2.9726	0.685	-0.491	0.321	2.305	0.955
600T125-97	0.1017	50	0.862	2.93	4.282	1.348	2.229	0.092	0.327	4.282	1.348	44.43	10888	2.9726	0.685	-0.491	0.321	2.305	0.955
600T150-27 ¹	0.0283	33	0.255	0.87	1.301	0.424	2.260	0.047	0.427	0.839	0.214	3.53	341	0.0680	0.320	-0.686	0.441	2.400	0.918
600T150-30	0.0312	33	0.281	0.96	1.434	0.467	2.260	0.051	0.427	0.971	0.254	5.01	456	0.0911	0.352	-0.685	0.440	2.400	0.918
600T150-33	0.0346	33	0.311	1.06	1.590	0.517	2.260	0.057	0.426	1.133	0.303	5.99	622	0.1242	0.390	-0.684	0.439	2.400	0.919
600T150-43	0.0451	33	0.405	1.38	2.073	0.673	2.261	0.073	0.424	1.662	0.474	9.37	1377	0.2749	0.504	-0.680	0.437	2.399	0.920
600T150-54	0.0566	33	0.509	1.73	2.612	0.843	2.266	0.091	0.422	2.298	0.690	13.64	2728	0.5432	0.632	-0.675	0.434	2.402	0.921
600T150-54	0.0566	50	0.509	1.73	2.612	0.843	2.266	0.091	0.422	2.130	0.610	18.27	2728	0.5432	0.632	-0.675	0.434	2.402	0.921
600T150-68	0.0713	33	0.641	2.18	3.310	1.059	2.273	0.113	0.419	3.111	0.965	19.06	4348	1.0855	0.797	-0.669	0.430	2.406	0.923
600T150-68	0.0713	50	0.641	2.18	3.310	1.059	2.273	0.113	0.419	2.963	0.893	26.72	5352	1.0855	0.797	-0.669	0.430	2.406	0.923
600T150-97	0.1017	33	0.913	3.11	4.780	1.504	2.288	0.156	0.414	4.780	1.504	31.69	7359	3.1479	1.138	-0.656	0.421	2.416	0.926
600T150-97	0.1017	50	0.913	3.11	4.780	1.504	2.288	0.156	0.414	4.660	1.447	43.33	10888	3.1479	1.138	-0.656	0.421	2.416	0.926
600T200-33	0.0346	33	0.346	1.18	1.913	0.623	2.352	0.126	0.604	1.269	0.334	6.59	622	0.1380	0.847	-1.048	0.655	2.645	0.843
600T200-43	0.0451	33	0.451	1.53	2.494	0.810	2.353	0.163	0.602	1.960	0.565	11.17	1377	0.3055	1.098	-1.044	0.652	2.644	0.844
600T200-54	0.0566	33	0.565	1.92	3.146	1.015	2.359	0.203	0.600	2.596	0.760	15.02	2728	0.6037	1.381	-1.038	0.649	2.646	0.846
600T200-54	0.0566	50	0.565	1.92	3.146	1.015	2.359	0.203	0.600	2.495	0.718	21.51	2728	0.6037	1.381	-1.038	0.649	2.646	0.846
600T200-68	0.0713	33	0.712	2.42	3.991	1.277	2.368	0.254	0.597	3.477	1.035	20.46	4348	1.2064	1.746	-1.031	0.644	2.651	0.849
600T200-68	0.0713	50	0.712	2.42	3.991	1.277	2.368	0.254	0.597	3.335	0.974	29.17	5352	1.2064	1.746	-1.031	0.644	2.651	0.849
600T200-97	0.1017	33	1.015	3.45	5.774	1.817	2.385	0.355	0.591	5.472	1.672	33.03	7359	3.4985	2.510	-1.016	0.635	2.659	0.854
600T200-97	0.1017	50	1.015	3.45	5.774	1.817	2.385	0.355	0.591	5.254	1.572	47.07	10888	3.4985	2.510	-1.016	0.635	2.659	0.854
800T125-33 ¹	0.0346	33	0.363	1.24	2.897	0.711	2.824	0.036	0.313	2.040	0.407	6.71	465	0.1449	0.456	-0.439	0.294	2.875	0.977
800T125-43	0.0451	33	0.473	1.61	3.774	0.925	2.824	0.046	0.311	3.016	0.641	12.66	1030	0.3208	0.589	-0.436	0.292	2.875	0.977
800T125-54	0.0566	33	0.594	2.02	4.747	1.158	2.828	0.057	0.309	4.193	0.941	18.60	2039	0.6339	0.735	-0.432	0.289	2.877	0.977
800T125-54	0.0566	50	0.594	2.02	4.747	1.158	2.828	0.057	0.309	3.862	0.825	24.69	2039	0.6339	0.735	-0.432	0.289	2.877	0.977
800T125-68	0.0713	33	0.748	2.54	6.000	1.455	2.833	0.070	0.307	5.761	1.358	26.84	4086	1.2668	0.920	-0.427	0.286	2.881	0.978
800T125-68	0.0713	50	0.748	2.54	6.000	1.455	2.833	0.070	0.307	5.398	1.217	36.44	4086	1.2668	0.920	-0.427	0.286	2.881	0.978
800T125-97	0.1017	33	1.066	3.63	8.617	2.062	2.844	0.097	0.301	8.615	2.062	46.58	8846	3.6738	1.296	-0.417	0.279	2.890	0.979
800T125-97	0.1017	50	1.066	3.63	8.617	2.062	2.844	0.097	0.301	8.615	2.062	64.03	10888	3.6738	1.296	-0.417	0.279	2.890	0.979
800T150-33 ¹	0.0346	33	0.380	1.29	3.181	0.781	2.892	0.060	0.397	2.124	0.414	6.83	465	0.1518	0.751	-0.588	0.388	2.977	0.961
800T150-43	0.0451	33	0.496	1.69	4.145	1.016	2.892	0.077	0.395	3.157	0.656	12.96	1030	0.3361	0.972	-0.584	0.386	2.977	0.961
800T150-54	0.0566	33	0.622	2.12	5.216	1.272	2.896	0.096	0.393	4.414	0.970	19.17	2039	0.6641	1.				

Section Properties

(T) Track Section Properties

Member	Design Thickness (in)	F _y (ksi)	Gross Properties							Effective Properties				Torsional Properties					
			Area (in ²)	Weight (lb/ft)	I _x (in ⁴)	S _x (in ³)	R _x (in)	I _y (in ⁴)	R _y (in)	I _x (in ⁴)	S _x (in ³)	M _a (in-k)	V _a (lb)	Jx1000 (in ⁴)	C _w (in ⁶)	X _o (in)	m (in)	R _o (in)	β
800T200-33 ¹	0.0346	33	0.415	1.41	3.750	0.921	3.006	0.135	0.571	2.267	0.424	6.99	465	0.1656	1.638	-0.917	0.589	3.194	0.918
800T200-43	0.0451	33	0.541	1.84	4.888	1.198	3.006	0.175	0.569	3.396	0.676	13.37	1030	0.3667	2.124	-0.913	0.587	3.193	0.918
800T200-54	0.0566	33	0.679	2.31	6.154	1.501	3.012	0.218	0.567	4.791	1.010	19.96	2039	0.7245	2.664	-0.908	0.584	3.196	0.919
800T200-54	0.0566	50	0.679	2.31	6.154	1.501	3.012	0.218	0.567	4.359	0.873	26.12	2039	0.7245	2.664	-0.908	0.584	3.196	0.919
800T200-68	0.0713	33	0.854	2.91	7.789	1.888	3.019	0.272	0.564	6.704	1.492	29.49	4086	1.4480	3.357	-0.902	0.580	3.201	0.921
800T200-68	0.0713	50	0.854	2.91	7.789	1.888	3.019	0.272	0.564	6.191	1.312	39.28	4086	1.4480	3.357	-0.902	0.580	3.201	0.921
800T200-97	0.1017	33	1.218	4.14	11.215	2.684	3.034	0.379	0.558	10.686	2.495	49.30	8846	4.1998	4.792	-0.889	0.571	3.211	0.923
800T200-97	0.1017	50	1.218	4.14	11.215	2.684	3.034	0.379	0.558	10.279	2.352	70.41	10888	4.1998	4.792	-0.889	0.571	3.211	0.923
1000T125-43 ¹	0.0451	33	0.563	1.92	6.633	1.306	3.431	0.047	0.290	4.982	0.820	13.53	822	0.3819	0.973	-0.379	0.259	3.465	0.988
1000T125-54	0.0566	33	0.707	2.40	8.337	1.635	3.434	0.059	0.288	6.995	1.217	24.05	1627	0.7548	1.212	-0.376	0.256	3.467	0.988
1000T125-54	0.0566	50	0.707	2.40	8.337	1.635	3.434	0.059	0.288	6.381	1.056	31.62	1627	0.7548	1.212	-0.376	0.256	3.467	0.988
1000T125-68	0.0713	33	0.890	3.03	10.526	2.054	3.439	0.073	0.286	9.714	1.782	35.22	3260	1.5084	1.515	-0.372	0.253	3.471	0.989
1000T125-68	0.0713	50	0.890	3.03	10.526	2.054	3.439	0.073	0.286	9.009	1.576	47.19	3260	1.5084	1.515	-0.372	0.253	3.471	0.989
1000T125-97	0.1017	33	1.269	4.32	15.083	2.913	3.448	0.100	0.281	15.066	2.907	57.45	8846	4.3751	2.123	-0.363	0.247	3.478	0.989
1000T125-97	0.1017	50	1.269	4.32	15.083	2.913	3.448	0.100	0.281	14.645	2.754	82.45	9505	4.3751	2.123	-0.363	0.247	3.478	0.989
1000T150-43 ¹	0.0451	33	0.586	1.99	7.210	1.419	3.508	0.080	0.370	5.185	0.837	13.82	822	0.3972	1.612	-0.513	0.345	3.565	0.979
1000T150-54	0.0566	33	0.735	2.50	9.065	1.778	3.512	0.100	0.368	7.318	1.250	24.71	1627	0.7850	2.013	-0.509	0.342	3.567	0.980
1000T150-54	0.0566	50	0.735	2.50	9.065	1.778	3.512	0.100	0.368	6.647	1.080	32.32	1627	0.7850	2.013	-0.509	0.342	3.567	0.980
1000T150-68	0.0713	33	0.926	3.15	11.450	2.234	3.517	0.124	0.366	10.231	1.848	36.52	3260	1.5688	2.522	-0.505	0.339	3.572	0.980
1000T150-68	0.0713	50	0.926	3.15	11.450	2.234	3.517	0.124	0.366	9.438	1.623	48.58	3260	1.5688	2.522	-0.505	0.339	3.572	0.980
1000T150-97	0.1017	33	1.320	4.49	16.420	3.171	3.527	0.172	0.361	16.403	3.166	62.55	8846	4.5504	3.557	-0.495	0.332	3.580	0.981
1000T150-97	0.1017	50	1.320	4.49	16.420	3.171	3.527	0.172	0.361	15.614	2.906	87.00	9505	4.5504	3.557	-0.495	0.332	3.580	0.981
1000T200-43 ¹	0.0451	33	0.631	2.15	8.364	1.646	3.641	0.183	0.539	5.531	0.861	14.21	822	0.4278	3.540	-0.813	0.534	3.769	0.953
1000T200-54	0.0566	33	0.792	2.69	10.520	2.063	3.645	0.228	0.537	7.864	1.297	25.62	1627	0.8454	4.434	-0.809	0.531	3.772	0.954
1000T200-54	0.0566	50	0.792	2.69	10.520	2.063	3.645	0.228	0.537	7.099	1.112	33.29	1627	0.8454	4.434	-0.809	0.531	3.772	0.954
1000T200-68	0.0713	33	0.997	3.39	13.296	2.595	3.652	0.284	0.534	11.100	1.939	38.31	3260	1.6896	5.576	-0.803	0.527	3.777	0.955
1000T200-68	0.0713	50	0.997	3.39	13.296	2.595	3.652	0.284	0.534	10.162	1.686	50.48	3260	1.6896	5.576	-0.803	0.527	3.777	0.955
1000T200-97	0.1017	33	1.422	4.84	19.093	3.687	3.665	0.397	0.528	18.213	3.432	67.81	8846	4.9010	7.924	-0.791	0.519	3.786	0.956
1000T200-97	0.1017	50	1.422	4.84	19.093	3.687	3.665	0.397	0.528	17.096	3.086	92.39	9505	4.9010	7.924	-0.791	0.519	3.786	0.956
1200T125-54 ¹	0.0566	33	0.820	2.79	13.341	2.187	4.034	0.060	0.271	10.603	1.493	24.63	1354	0.8756	1.820	-0.333	0.230	4.056	0.993
1200T125-54 ¹	0.0566	50	0.820	2.79	13.341	2.187	4.034	0.060	0.271	9.600	1.287	32.18	1354	0.8756	1.820	-0.333	0.230	4.056	0.993
1200T125-68	0.0713	33	1.033	3.51	16.834	2.749	4.037	0.074	0.268	14.856	2.208	43.64	2712	1.7501	2.270	-0.329	0.227	4.060	0.993
1200T125-68	0.0713	50	1.033	3.51	16.834	2.749	4.037	0.074	0.268	13.663	1.935	57.95	2712	1.7501	2.270	-0.329	0.227	4.060	0.993
1200T125-97	0.1017	33	1.472	5.01	24.090	3.899	4.045	0.102	0.264	23.391	3.691	72.93	7901	5.0763	3.171	-0.322	0.222	4.066	0.994
1200T125-97	0.1017	50	1.472	5.01	24.090	3.899	4.045	0.102	0.264	22.521	3.443	103.09	7901	5.0763	3.171	-0.322	0.222	4.066	0.994
1200T150-54 ¹	0.0566	33	0.848	2.89	14.384	2.358	4.118	0.103	0.348	11.042	1.531	25.26	1354	0.9059	3.033	-0.454	0.310	4.157	0.988
1200T150-54 ¹	0.0566	50	0.848	2.89	14.384	2.358	4.118	0.103	0.348	9.960	1.314	32.85	1354	0.9059	3.033	-0.454	0.310	4.157	0.988
1200T150-68	0.0713	33	1.068	3.63	18.156	2.964	4.122	0.127	0.345	15.567	2.283	45.12	2712	1.8105	3.795	-0.450	0.307	4.161	0.988
1200T150-68	0.0713	50	1.068	3.63	18.156	2.964	4.122	0.127	0.345	14.248	1.988	59.53	2712	1.8105	3.795	-0.450	0.307	4.161	0.988
1200T150-97	0.1017	33	1.523	5.18	25.999	4.208	4.131	0.176	0.340	25.307	3.997	78.99	7901	5.2516	5.335	-0.441	0.301	4.169	0.989
1200T150-97	0.1017	50	1.523	5.18	25.999	4.208	4.131	0.176	0.340	23.878	3.620	108.38	7901	5.2516	5.335	-0.441	0.301	4.169	0.989
1200T200-54 ¹	0.0566	33	0.905	3.08	16.470	2.700	4.266	0.236	0.510	11.781	1.583	26.12	1354	0.9663	6.714	-0.730	0.487	4.358	0.972
1200T200-54 ¹	0.0566	50	0.905	3.08	16.470	2.700	4.266	0.236	0.510	10.566	1.351	33.77	1354	0.9663	6.714	-0.730	0.487	4.358	0.972
1200T200-68	0.0713	33	1.140	3.88	20.799	3.396	4.272	0.294	0.508	16.751	2.386	47.14	2712	1.9313	8.431	-0.725	0.483	4.363	0.972
1200T200-68	0.0713	50	1.140	3.88	20.799	3.396	4.272	0.294	0.508	15.827	2.060	61.68	2712	1.9313	8.431	-0.725	0.483	4.363	0.972
1200T200-97	0.1017	33	1.625	5.53	29.816	4.826	4.284	0.410	0.502	27.221	4.303	85.02	7901	5.6022	11.945	-0.714	0.476	4.372	0.973
1200T200-97	0.1017	50	1.625	5.53	29.816	4.826	4.284	0.410	0.502	25.911	3.824	114.50	7901	5.6022	11.945	-0.714	0.476	4.372	0.973
1200T200-118	0.1242	33	1.984	6.75	36.544	5.878	4.292	0.492	0.498	36.215	5.800	114.62	13193	10.2007	14.513	-0.706	0.471	4.378	0.974
1200T200-118	0.1242	50	1.984	6.75	36.544	5.878	4.292	0.492	0.498	34.290	5.285	158.23	14431	10.2007	14.513	-0.706	0.471	4.378	0.974
1400T125-54 ¹	0.0566	33	0.933	3.17	19.987	2.815	4.628	0.061	0.256	15.043	1.768	29.17	1160	0.9965	2.559	-0.299	0.209	4.645	0.996
1400T125-54 ¹	0.0566	50	0.933	3.17	19.987	2.815	4.628	0.061	0.256	13.538	1.518	37.95	1160	0.9965	2.559	-0.299	0.209	4.645	0.996
1400T125-68	0.0713	33	1.175	4.00	25.208	3.538	4.631	0.076	0.254	21.231	2.634	52.04	2322	1.9917	3.189	-0.296	0.206	4.648	0.996
1400T125-68	0.0713	50	1.175	4.00	25.208	3.538	4.631	0.076	0.254	19.395	2.294	68.69	2322	1.9917	3.189	-0.296	0.206	4.648	0.996
1400T125-97	0.1017	33	1.676	5.70	36.043	5.021	4.638	0.104	0.249	33.862	4.481	88.55	6759	5.7776	4.444	-0.289	0.201	4.653	0.996
1400T125-97	0.1017	50	1.676	5.70	36.043	5.021	4.638	0.104	0.249	32.347	4.135	123.81	6759	5.7776	4.444	-0.289	0.201	4.653	0.996
1400T125-118	0.1242	33	2.046	6.96	44.090	6.109	4.642	0.124	0.246	43.084	5.855	115.70	12342	10.520					

Section Properties

(T) Track Section Properties

Member	Design Thickness (in)	F _y (ksi)	Gross Properties							Effective Properties				Torsional Properties					
			Area (in ²)	Weight (lb/ft)	I _x (in ⁴)	S _x (in ³)	R _x (in)	I _y (in ⁴)	R _y (in)	I _x (in ⁴)	S _x (in ³)	M _a (in-k)	V _a (lb)	Jx1000 (in ⁴)	C _w (in ⁶)	X _o (in)	m (in)	R _o (in)	β
1400T150-97	0.1017	50	1.727	5.87	38.626	5.381	4.730	0.180	0.323	34.153	4.336	129.82	6759	5.9529	7.503	-0.399	0.275	4.757	0.993
1400T150-118	0.1242	33	2.108	7.17	47.269	6.549	4.735	0.215	0.319	46.269	6.292	124.34	12342	10.8394	9.048	-0.393	0.270	4.762	0.993
1400T150-118	0.1242	50	2.108	7.17	47.269	6.549	4.735	0.215	0.319	44.638	5.888	176.28	12342	10.8394	9.048	-0.393	0.270	4.762	0.993
1400T200-54 ¹	0.0566	33	1.018	3.46	24.232	3.413	4.879	0.242	0.487	16.565	1.870	30.85	1160	1.0872	9.520	-0.665	0.449	4.948	0.982
1400T200-54 ¹	0.0566	50	1.018	3.46	24.232	3.413	4.879	0.242	0.487	14.779	1.590	39.75	1160	1.0872	9.520	-0.665	0.449	4.948	0.982
1400T200-68	0.0713	33	1.282	4.36	30.583	4.293	4.884	0.301	0.485	23.703	2.833	55.97	2322	2.1729	11.942	-0.661	0.446	4.952	0.982
1400T200-68	0.0713	50	1.282	4.36	30.583	4.293	4.884	0.301	0.485	21.417	2.434	72.87	2322	2.1729	11.942	-0.661	0.446	4.952	0.982
1400T200-97	0.1017	33	1.828	6.22	43.791	6.101	4.894	0.420	0.479	39.789	5.179	102.34	6759	6.3035	16.883	-0.651	0.439	4.960	0.983
1400T200-97	0.1017	50	1.828	6.22	43.791	6.101	4.894	0.420	0.479	36.804	4.563	136.62	6759	6.3035	16.883	-0.651	0.439	4.960	0.983
1400T200-118	0.1242	33	2.232	7.59	53.628	7.430	4.901	0.505	0.476	52.154	7.069	139.69	12342	11.4780	20.479	-0.644	0.434	4.966	0.983
1400T200-118	0.1242	50	2.232	7.59	53.628	7.430	4.901	0.505	0.476	49.001	6.361	190.46	12342	11.4780	20.479	-0.644	0.434	4.966	0.983
1600T125-54 ¹	0.0566	33	1.046	3.56	28.500	3.519	5.219	0.062	0.243	20.334	2.043	33.71	1014	1.1174	3.432	-0.272	0.191	5.232	0.997
1600T125-54 ¹	0.0566	50	1.046	3.56	28.500	3.519	5.219	0.062	0.243	18.210	1.749	43.72	1014	1.1174	3.432	-0.272	0.191	5.232	0.997
1600T125-68 ¹	0.0713	33	1.318	4.48	35.935	4.423	5.222	0.077	0.241	28.878	3.059	50.48	2029	2.2333	4.273	-0.268	0.189	5.234	0.997
1600T125-68 ¹	0.0713	50	1.318	4.48	35.935	4.423	5.222	0.077	0.241	26.230	2.653	66.32	2029	2.2333	4.273	-0.268	0.189	5.234	0.997
1600T125-97	0.1017	33	1.879	6.39	51.349	6.279	5.227	0.105	0.237	46.565	5.274	104.22	5906	6.4788	5.945	-0.262	0.184	5.239	0.997
1600T125-97	0.1017	50	1.879	6.39	51.349	6.279	5.227	0.105	0.237	44.178	4.826	144.50	5906	6.4788	5.945	-0.262	0.184	5.239	0.997
1600T125-118	0.1242	33	2.294	7.81	62.789	7.641	5.231	0.125	0.234	59.659	6.966	137.65	10781	11.7973	7.126	-0.257	0.181	5.243	0.998
1600T125-118	0.1242	50	2.294	7.81	62.789	7.641	5.231	0.125	0.234	56.954	6.422	192.27	10781	11.7973	7.126	-0.257	0.181	5.243	0.998
1600T150-54 ¹	0.0566	33	1.075	3.66	30.343	3.747	5.314	0.106	0.314	21.050	2.091	34.50	1014	1.1476	5.757	-0.374	0.260	5.336	0.995
1600T150-54 ¹	0.0566	50	1.075	3.66	30.343	3.747	5.314	0.106	0.314	18.788	1.783	44.56	1014	1.1476	5.757	-0.374	0.260	5.336	0.995
1600T150-68 ¹	0.0713	33	1.354	4.60	38.268	4.710	5.317	0.132	0.312	30.062	3.154	52.03	2029	2.2938	7.188	-0.371	0.258	5.339	0.995
1600T150-68 ¹	0.0713	50	1.354	4.60	38.268	4.710	5.317	0.132	0.312	27.186	2.719	67.97	2029	2.2938	7.188	-0.371	0.258	5.339	0.995
1600T150-97	0.1017	33	1.930	6.57	54.708	6.690	5.324	0.183	0.308	49.970	5.676	112.15	5906	6.6541	10.066	-0.363	0.253	5.345	0.995
1600T150-97	0.1017	50	1.930	6.57	54.708	6.690	5.324	0.183	0.308	46.496	5.051	151.22	5906	6.6541	10.066	-0.363	0.253	5.345	0.995
1600T150-118	0.1242	33	2.356	8.02	66.919	8.144	5.329	0.218	0.304	63.812	7.461	147.44	10781	12.1166	12.124	-0.358	0.249	5.350	0.996
1600T150-118	0.1242	50	2.356	8.02	66.919	8.144	5.329	0.218	0.304	61.141	6.913	206.98	10781	12.1166	12.124	-0.358	0.249	5.350	0.996
1600T200-54 ¹	0.0566	33	1.131	3.85	34.030	4.202	5.485	0.246	0.467	22.236	2.156	35.57	1014	1.2081	12.864	-0.612	0.417	5.538	0.988
1600T200-54 ¹	0.0566	50	1.131	3.85	34.030	4.202	5.485	0.246	0.467	19.751	1.828	45.71	1014	1.2081	12.864	-0.612	0.417	5.538	0.988
1600T200-68 ¹	0.0713	33	1.425	4.85	42.933	5.284	5.489	0.307	0.464	31.988	3.280	54.11	2029	2.4146	16.123	-0.607	0.414	5.542	0.988
1600T200-68 ¹	0.0713	50	1.425	4.85	42.933	5.284	5.489	0.307	0.464	28.758	2.808	70.19	2029	2.4146	16.123	-0.607	0.414	5.542	0.988
1600T200-97	0.1017	33	2.032	6.91	61.425	7.511	5.498	0.428	0.459	54.205	6.058	119.71	5906	7.0047	22.755	-0.598	0.408	5.550	0.988
1600T200-97	0.1017	50	2.032	6.91	61.425	7.511	5.498	0.428	0.459	49.843	5.303	158.77	5906	7.0047	22.755	-0.598	0.408	5.550	0.988
1600T200-118	0.1242	33	2.481	8.44	75.179	9.149	5.505	0.515	0.455	71.446	8.338	164.77	10781	12.7552	27.568	-0.592	0.403	5.556	0.989
1600T200-118	0.1242	50	2.481	8.44	75.179	9.149	5.505	0.515	0.455	66.716	7.441	222.78	10781	12.7552	27.568	-0.592	0.403	5.556	0.989

¹ Web-height to thickness ratio exceeds 200. Web stiffeners are required at all support points and concentrated loads.

See Section Properties Table Notes

Section Properties

Web Depth-to-Thickness Ratios for Stud and Joist Members ^{2, 3}										
Style	Web Depth (in)	18Mil 0.0188	27Mil 0.0283	30Mil 0.0312	33Mil 0.0346	43Mil 0.0451	54Mil 0.0566	68Mil 0.0713	97Mil 0.1017	118Mil 0.1242
162S	1.625	75	50	45	41	31	24	18	11	8
250S	2.500	122	81	73	66	50	39	30	20	15
350S	3.500	175	116	105	95	72	57	44	29	23
362S	3.625	182	120	109	98	75	59	46	31	24
400S	4.000	202 ¹	134	121	109	84	66	51	34	27
550S	5.500	-	187	169	153	117	92	72	49	39
600S	6.000	-	204 ¹	185	167	128	101	79	54	43
800S	8.000	-	-	249 ¹	225 ¹	172	136	107	74	59
1000S	10.000	-	-	-	-	217 ¹	172	135	93	76
1200S	12.000	-	-	-	-	-	207 ¹	163	113	92
1400S	14.000	-	-	-	-	-	242 ¹	191	133	108
1600S	16.000	-	-	-	-	-	-	219 ¹	152	124

¹ h/t exceeds 200

² h value used for h/t calculations is the flat width of the web. For Stud members, this is the out-to-out member size, minus twice the thickness, minus twice the inside bend radius.

³ h/t values exceeding 260 are marked with a dash (-)

Members with h/t between 200 and 260			
Member	h/t	Member	h/t
400S__18	202	1000__43	217
600S__27	204	1200S__54	207
800S__30	249	1400S__54	242
800S__33	225	1600S__68	219

Limiting Wall Height Tables - Non-Composite

Interior Non-Structural Non-Composite Table Notes

1. 5 psf, 7.5 psf, and 10 psf loads have NOT been reduced for strength or deflection checks. Full lateral load is applied.
2. Calculated properties are based on AISI S100-16/S1-18, North American Specification for Cold-Formed Steel Structural Members with Supplement 1.
3. Limiting heights are based on continuous support of each flange over the full length of the stud.
4. Limiting heights are based on steel properties only (non-composite).
5. Web crippling checks are based on end-one flange loading condition using 1-inch end bearing.
6. Allowable Flexural Strength is based on lateral and torsional bracing at a maximum spacing of 4 feet on center.

Interior Non-Structural Non-Composite

Stud Member	Spacing, in, oc	Fy, ksi	5 psf			7.5 psf			10 psf		
			L/120	L/240	L/360	L/120	L/240	L/360	L/120	L/240	L/360
162S125-18	12	33	8'-4"	7'-4"	6'-5"	6'-10"	6'-5"	5'-7"	5'-11"	5'-10"	5'-1"
	16		7'-3"	6'-8"	5'-10"	5'-11"	5'-10"	5'-1"	5'-1"	5'-1"	4'-7"
	24		5'-11"	5'-10"	5'-1"	4'-10"	4'-10"	4'-5"	4'-2"	4'-2"	4'-0"
162S125-27	12	33	10'-10"	8'-7"	7'-6"	8'-11"	7'-6"	6'-6"	7'-9"	6'-10"	5'-11"
	16		9'-6"	7'-9"	6'-10"	7'-9"	6'-10"	5'-11"	6'-9"	6'-2"	5'-5"
	24		7'-9"	6'-10"	5'-11"	6'-4"	5'-11"	5'-2"	5'-6"	5'-5"	4'-9"
162S125-30	12	33	11'-3"	8'-11"	7'-9"	9'-7"	7'-9"	6'-9"	8'-4"	7'-1"	6'-2"
	16		10'-2"	8'-1"	7'-1"	8'-4"	7'-1"	6'-2"	7'-2"	6'-5"	5'-7"
	24		8'-4"	7'-1"	6'-2"	6'-9"	6'-2"	5'-5"	5'-10"	5'-7"	4'-11"
162S125-33	12	33	11'-8"	9'-3"	8'-1"	10'-2"	8'-1"	7'-1"	8'-11"	7'-4"	6'-5"
	16		10'-7"	8'-5"	7'-4"	8'-11"	7'-4"	6'-5"	7'-9"	6'-8"	5'-10"
	24		8'-11"	7'-4"	6'-5"	7'-4"	6'-5"	5'-7"	6'-4"	5'-10"	5'-1"
250S125-18	12	33	11'-1"	10'-3"	8'-11"	9'-1"	8'-11"	7'-10"	7'-10"	7'-10"	7'-1"
	16		9'-7"	9'-4"	8'-1"	7'-10"	7'-10"	7'-1"	6'-10"	6'-10"	6'-5"
	24		7'-10"	7'-10"	7'-1"	6'-5"	6'-5"	6'-2"	5'-7"	5'-7"	5'-7"
250S125-27	12	33	14'-7"	11'-11"	10'-5"	11'-10"	10'-5"	9'-1"	10'-3"	9'-6"	8'-3"
	16		12'-7"	10'-10"	9'-6"	10'-3"	9'-6"	8'-3"	8'-11"	8'-7"	7'-6"
	24		10'-3"	9'-6"	8'-3"	8'-5"	8'-3"	7'-3"	7'-3"	7'-3"	6'-7"
250S125-30	12	33	15'-6"	12'-5"	10'-10"	12'-8"	10'-10"	9'-6"	11'-0"	9'-10"	8'-7"
	16		13'-5"	11'-3"	9'-10"	11'-0"	9'-10"	8'-7"	9'-6"	8'-11"	7'-10"
	24		11'-0"	9'-10"	8'-7"	9'-0"	8'-7"	7'-6"	7'-9"	7'-9"	6'-10"
250S125-33	12	33	16'-3"	12'-11"	11'-3"	13'-7"	11'-3"	9'-10"	11'-9"	10'-3"	8'-11"
	16		14'-5"	11'-9"	10'-3"	11'-9"	10'-3"	8'-11"	10'-2"	9'-4"	8'-2"
	24		11'-9"	10'-3"	8'-11"	9'-7"	8'-11"	7'-10"	8'-4"	8'-2"	7'-1"
250S125-43	12	33	18'-0"	14'-3"	12'-6"	15'-9"	12'-6"	10'-11"	13'-8"	11'-4"	9'-11"
	16		16'-4"	13'-0"	11'-4"	13'-8"	11'-4"	9'-11"	11'-10"	10'-4"	9'-0"
	24		13'-8"	11'-4"	9'-11"	11'-2"	9'-11"	8'-8"	9'-8"	9'-0"	7'-10"
250S125-54	12	33	19'-3"	15'-3"	13'-4"	16'-10"	13'-4"	11'-8"	15'-3"	12'-2"	10'-7"
	16		17'-6"	13'-11"	12'-2"	15'-3"	12'-2"	10'-7"	13'-3"	11'-0"	9'-8"
	24		15'-3"	12'-2"	10'-7"	12'-6"	10'-7"	9'-3"	10'-10"	9'-8"	8'-5"
350S125-18	12	33	12'-11"	12'-10"	11'-2"	10'-7"	10'-7"	9'-9"	9'-2"	9'-2"	8'-11"
	16		11'-2"	11'-2"	10'-2"	9'-2"	9'-2"	8'-11"	7'-11"	7'-11"	7'-11"
	24		9'-2"	9'-2"	8'-11"	7'-5"	7'-5"	7'-5"	6'-6"	6'-6"	6'-6"
350S125-27	12	33	17'-4"	15'-2"	13'-3"	14'-2"	13'-3"	11'-7"	12'-3"	12'-1"	10'-6"
	16		15'-0"	13'-10"	12'-1"	12'-3"	12'-1"	10'-6"	10'-8"	10'-8"	9'-7"
	24		12'-3"	12'-1"	10'-6"	10'-0"	10'-0"	9'-2"	8'-8"	8'-8"	8'-4"
350S125-30	12	33	18'-8"	15'-10"	13'-10"	15'-3"	13'-10"	12'-1"	13'-2"	12'-7"	11'-0"
	16		16'-2"	14'-5"	12'-7"	13'-2"	12'-7"	11'-0"	11'-5"	11'-5"	10'-0"
	24		13'-2"	12'-7"	11'-0"	10'-9"	10'-9"	9'-7"	9'-4"	9'-4"	8'-9"
350S125-33	12	33	20'-1"	16'-6"	14'-5"	16'-5"	14'-5"	12'-7"	14'-3"	13'-1"	11'-5"
	16		17'-5"	15'-0"	13'-1"	14'-3"	13'-1"	11'-5"	12'-4"	11'-11"	10'-5"
	24		14'-3"	13'-1"	11'-5"	11'-7"	11'-5"	10'-0"	10'-1"	10'-1"	9'-1"
350S125-43	12	33	23'-2"	18'-5"	16'-1"	19'-3"	16'-1"	14'-0"	16'-8"	14'-7"	12'-9"
	16		20'-5"	16'-9"	14'-7"	16'-8"	14'-7"	12'-9"	14'-6"	13'-3"	11'-7"
	24		16'-8"	14'-7"	12'-9"	13'-8"	12'-9"	11'-2"	11'-10"	11'-7"	10'-1"
350S125-54	12	33	24'-10"	19'-9"	17'-3"	21'-7"	17'-3"	15'-1"	18'-8"	15'-8"	13'-8"
	16		22'-7"	17'-11"	15'-8"	18'-8"	15'-8"	13'-8"	16'-2"	14'-3"	12'-5"
	24		18'-8"	15'-8"	13'-8"	15'-3"	13'-8"	11'-11"	13'-2"	12'-5"	10'-10"

^{1, 2}, see section property table footnotes

Limiting Wall Height Tables - Non-Composite

Interior Non-Structural Non-Composite

Stud Member	Spacing, in, oc	Fy, ksi	5 psf			7.5 psf			10 psf		
			L/120	L/240	L/360	L/120	L/240	L/360	L/120	L/240	L/360
362S125-18	12	33	13'-2"	13'-2"	11'-6"	10'-9"	10'-9"	10'-0"	9'-4"	9'-4"	9'-1"
	16		11'-5"	11'-5"	10'-5"	9'-4"	9'-4"	9'-1"	8'-1"	8'-1"	8'-1"
	24		9'-4"	9'-4"	9'-1"	7'-7"	7'-7"	7'-7"	6'-7"	6'-7"	6'-7"
362S125-27	12	33	17'-9"	15'-7"	13'-8"	14'-6"	13'-8"	11'-11"	12'-6"	12'-5"	10'-10"
	16		15'-4"	14'-2"	12'-5"	12'-6"	12'-5"	10'-10"	10'-10"	10'-10"	9'-10"
	24		12'-6"	12'-5"	10'-10"	10'-3"	10'-3"	9'-5"	8'-10"	8'-10"	8'-7"
362S125-30	12	33	19'-1"	16'-3"	14'-2"	15'-7"	14'-2"	12'-5"	13'-6"	12'-11"	11'-3"
	16		16'-6"	14'-9"	12'-11"	13'-6"	12'-11"	11'-3"	11'-8"	11'-8"	10'-3"
	24		13'-6"	12'-11"	11'-3"	11'-0"	11'-0"	9'-10"	9'-6"	9'-6"	8'-11"
362S125-33	12	33	20'-7"	17'-0"	14'-10"	16'-9"	14'-10"	12'-11"	14'-6"	13'-6"	11'-9"
	16		17'-10"	15'-5"	13'-6"	14'-6"	13'-6"	11'-9"	12'-7"	12'-3"	10'-8"
	24		14'-6"	13'-6"	11'-9"	11'-10"	11'-9"	10'-3"	10'-3"	10'-3"	9'-4"
362S125-43	12	33	23'-10"	18'-11"	16'-6"	19'-8"	16'-6"	14'-5"	17'-1"	15'-0"	13'-1"
	16		20'-11"	17'-2"	15'-0"	17'-1"	15'-0"	13'-1"	14'-9"	13'-8"	11'-11"
	24		17'-1"	15'-0"	13'-1"	13'-11"	13'-1"	11'-5"	12'-1"	11'-11"	10'-5"
362S125-54	12	33	25'-7"	20'-4"	17'-9"	22'-1"	17'-9"	15'-6"	19'-1"	16'-1"	14'-1"
	16		23'-3"	18'-5"	16'-1"	19'-1"	16'-1"	14'-1"	16'-7"	14'-8"	12'-10"
	24		19'-1"	16'-1"	14'-1"	15'-7"	14'-1"	12'-4"	13'-6"	12'-10"	11'-2"
400S125-18 ¹	12	33	12'-9"	12'-9"	12'-4"	10'-5"	10'-5"	10'-5"	9'-0"	9'-0"	9'-0"
	16		11'-0"	11'-0"	11'-0"	9'-0"	9'-0"	9'-0"	7'-9"	7'-9"	7'-9"
	24		9'-0"	9'-0"	9'-0"	7'-4"	7'-4"	7'-4"	6'-4"	6'-4"	6'-4"
400S125-27	12	33	18'-9"	16'-10"	14'-8"	15'-4"	14'-8"	12'-10"	13'-3"	13'-3"	11'-8"
	16		16'-3"	15'-3"	13'-4"	13'-3"	13'-3"	11'-8"	11'-6"	11'-6"	10'-7"
	24		13'-3"	13'-3"	11'-8"	10'-10"	10'-10"	10'-2"	9'-5"	9'-5"	9'-3"
400S125-30	12	33	20'-2"	17'-6"	15'-4"	16'-6"	15'-4"	13'-5"	14'-3"	13'-11"	12'-2"
	16		17'-6"	15'-11"	13'-11"	14'-3"	13'-11"	12'-2"	12'-4"	12'-4"	11'-1"
	24		14'-3"	13'-11"	12'-2"	11'-8"	11'-8"	10'-7"	10'-1"	10'-1"	9'-8"
400S125-33	12	33	21'-10"	18'-4"	16'-0"	17'-10"	16'-0"	14'-0"	15'-5"	14'-6"	12'-8"
	16		18'-11"	16'-8"	14'-6"	15'-5"	14'-6"	12'-8"	13'-4"	13'-2"	11'-6"
	24		15'-5"	14'-6"	12'-8"	12'-7"	12'-7"	11'-1"	10'-11"	10'-11"	10'-1"
400S125-43	12	33	25'-8"	20'-5"	17'-10"	20'-11"	17'-10"	15'-7"	18'-2"	16'-3"	14'-2"
	16		22'-3"	18'-7"	16'-3"	18'-2"	16'-3"	14'-2"	15'-8"	14'-9"	12'-10"
	24		18'-2"	16'-3"	14'-2"	14'-10"	14'-2"	12'-4"	12'-10"	12'-10"	11'-3"
400S125-54	12	33	27'-8"	22'-0"	19'-2"	23'-7"	19'-2"	16'-9"	20'-5"	17'-5"	15'-5"
	16		25'-1"	20'-0"	17'-5"	20'-5"	17'-5"	15'-3"	17'-9"	15'-10"	13'-10"
	24		20'-5"	17'-5"	15'-3"	16'-8"	15'-3"	13'-4"	14'-6"	13'-10"	12'-1"
550S125-18 ²	12	33	15'-4"	15'-4"	15'-4"	12'-7"	12'-7"	12'-7"	10'-10"	10'-10"	10'-10"
	16		13'-4"	13'-4"	13'-4"	10'-10"	10'-10"	10'-10"	9'-5"	9'-5"	9'-5"
	24		10'-10"	10'-10"	10'-10"	8'-10"	8'-10"	8'-10"	7'-8"	7'-8"	7'-8"
550S125-27	12	33	22'-9"	21'-7"	18'-10"	18'-7"	18'-7"	16'-6"	16'-1"	16'-1"	15'-0"
	16		19'-9"	19'-7"	17'-2"	16'-1"	16'-1"	15'-0"	13'-11"	13'-11"	13'-7"
	24		16'-1"	16'-1"	15'-0"	13'-2"	13'-2"	13'-1"	11'-5"	11'-5"	11'-5"
550S125-30	12	33	24'-6"	22'-6"	19'-8"	20'-0"	19'-8"	17'-2"	17'-4"	17'-4"	15'-7"
	16		21'-2"	20'-5"	17'-10"	17'-4"	17'-4"	15'-7"	15'-0"	15'-0"	14'-2"
	24		17'-4"	17'-4"	15'-7"	14'-2"	14'-2"	13'-8"	12'-3"	12'-3"	12'-3"
550S125-33	12	33	26'-5"	23'-6"	20'-7"	21'-7"	20'-7"	17'-11"	18'-8"	18'-8"	16'-4"
	16		22'-10"	21'-4"	18'-8"	18'-8"	18'-8"	16'-4"	16'-2"	16'-2"	14'-10"
	24		18'-8"	18'-8"	16'-4"	15'-3"	15'-3"	14'-3"	13'-2"	13'-2"	12'-11"
550S125-30	12	33	24'-6"	22'-6"	19'-8"	20'-0"	19'-8"	17'-2"	17'-4"	17'-4"	15'-7"
	16		21'-2"	20'-5"	17'-10"	17'-4"	17'-4"	15'-7"	15'-0"	15'-0"	14'-2"
	24		17'-4"	17'-4"	15'-7"	14'-2"	14'-2"	13'-8"	12'-3"	12'-3"	12'-3"
550S125-33	12	33	26'-5"	23'-6"	20'-7"	21'-7"	20'-7"	17'-11"	18'-8"	18'-8"	16'-4"
	16		22'-10"	21'-4"	18'-8"	18'-8"	18'-8"	16'-4"	16'-2"	16'-2"	14'-10"
	24		18'-8"	18'-8"	16'-4"	15'-3"	15'-3"	14'-3"	13'-2"	13'-2"	12'-11"

See Interior Non-Structural Non-Composite Table Notes

¹, ², see section property table footnotes

Limiting Wall Height Tables - Non-Composite

Interior Non-Structural Non-Composite

Stud Member	Spacing, in, oc	Fy, ksi	5 psf			7.5 psf			10 psf		
			L/120	L/240	L/360	L/120	L/240	L/360	L/120	L/240	L/360
550S125-43	12	33	32'-1"	26'-5"	23'-1"	26'-2"	23'-1"	20'-2"	22'-8"	20'-11"	18'-4"
	16		27'-9"	24'-0"	20'-11"	22'-8"	20'-11"	18'-4"	19'-8"	19'-1"	16'-8"
	24		22'-8"	20'-11"	18'-4"	18'-6"	18'-4"	16'-0"	16'-0"	16'-0"	14'-6"
550S125-54	12	33	35'-11"	28'-6"	24'-11"	29'-5"	24'-11"	21'-9"	25'-5"	22'-8"	19'-9"
	16		31'-2"	25'-11"	22'-8"	25'-5"	22'-8"	19'-9"	22'-1"	20'-7"	18'-0"
	24		25'-5"	22'-8"	19'-9"	20'-9"	19'-9"	17'-3"	18'-0"	18'-0"	15'-8"
600S125-18 ²	12	33	16'-0"	16'-0"	16'-0"	13'-1"	13'-1"	13'-1"	11'-4"	11'-4"	11'-4"
	16		13'-10"	13'-10"	13'-10"	11'-4"	11'-4"	11'-4"	9'-10"	9'-10"	9'-10"
	24		11'-4"	11'-4"	11'-4"	9'-3"	9'-3"	9'-3"	8'-0"	8'-0"	8'-0"
600S125-27 ¹	12	33	21'-9"	21'-9"	20'-1"	17'-9"	17'-9"	17'-7"	15'-4"	15'-4"	15'-4"
	16		18'-10"	18'-10"	18'-3"	15'-4"	15'-4"	15'-4"	13'-4"	13'-4"	13'-4"
	24		15'-4"	15'-4"	15'-4"	12'-7"	12'-7"	12'-7"	10'-10"	10'-10"	10'-10"
600S125-30	12	33	25'-7"	24'-0"	21'-0"	20'-11"	20'-11"	18'-4"	18'-1"	18'-1"	16'-8"
	16		22'-2"	21'-10"	19'-1"	18'-1"	18'-1"	16'-8"	15'-8"	15'-8"	15'-2"
	24		18'-1"	18'-1"	16'-8"	14'-9"	14'-9"	14'-7"	12'-9"	12'-9"	12'-9"
600S125-33	12	33	27'-8"	25'-2"	22'-0"	22'-7"	22'-0"	19'-2"	19'-7"	19'-7"	17'-5"
	16		23'-11"	22'-10"	19'-11"	19'-7"	19'-7"	17'-5"	16'-11"	16'-11"	15'-10"
	24		19'-7"	19'-7"	17'-5"	15'-11"	15'-11"	15'-3"	13'-10"	13'-10"	13'-10"
600S125-43	12	33	33'-8"	28'-3"	24'-8"	27'-6"	24'-8"	21'-7"	23'-10"	22'-5"	19'-7"
	16		29'-2"	25'-8"	22'-5"	23'-10"	22'-5"	19'-7"	20'-7"	20'-4"	17'-10"
	24		23'-10"	22'-5"	19'-7"	19'-5"	19'-5"	17'-1"	16'-10"	16'-10"	15'-7"
600S125-54	12	33	38'-3"	30'-7"	26'-9"	31'-2"	26'-9"	23'-4"	27'-0"	24'-4"	21'-3"
	16		33'-1"	27'-10"	24'-4"	27'-0"	24'-4"	21'-3"	23'-5"	22'-1"	19'-3"
	24		27'-0"	24'-4"	21'-3"	22'-1"	21'-3"	18'-7"	19'-1"	19'-1"	16'-10"
800S125-33 ¹	12	33	28'-11"	28'-11"	27'-4"	23'-7"	23'-7"	23'-7"	20'-5"	20'-5"	20'-5"
	16		25'-1"	25'-1"	24'-10"	20'-5"	20'-5"	20'-5"	17'-9"	17'-9"	17'-9"
	24		20'-5"	20'-5"	20'-5"	16'-8"	16'-8"	16'-8"	14'-6"	14'-6"	14'-6"
800S125-43	12	33	38'-11"	35'-3"	30'-9"	31'-9"	30'-9"	26'-11"	27'-6"	27'-6"	24'-5"
	16		33'-9"	32'-0"	28'-0"	27'-6"	27'-6"	24'-5"	23'-10"	23'-10"	22'-2"
	24		27'-6"	27'-6"	24'-5"	22'-6"	22'-6"	21'-4"	19'-6"	19'-6"	19'-5"
800S125-54	12	33	45'-6"	38'-5"	33'-7"	37'-2"	33'-7"	29'-4"	32'-2"	30'-6"	26'-8"
	16		39'-5"	34'-11"	30'-6"	32'-2"	30'-6"	26'-8"	27'-10"	27'-8"	24'-2"
	24		32'-2"	30'-6"	26'-8"	26'-3"	26'-3"	23'-3"	22'-9"	22'-9"	21'-2"

See Interior Non-Structural Non-Composite Table Notes

¹, ², see section property table footnotes

Limiting Wall Height Tables - Composite

Interior Non-Structural Composite Table Notes

- 1 Allowable composite limiting heights are calculated using ICC-ES AC86-2012.
- 2 Minimum safety factor for strength = 1,508 for 5 to 10 psf, and 2,327 for 15 psf.
- 3 The gypsum board must be applied full height to each stud flange and installed using minimum No. 6 Type S Drywall screws spaced a maximum of 12 in. on-center for studs at 24-in spacing, and 16 in. on-center for studs at 16 and 12 in. spacing.
- 4 No fasteners are required for attaching the stud to the track.
- 5 Stud end bearing must be a minimum of 1 inch.
- 6 Minimum material yield strength equals 33 ksi.
- 7 'f' adjacent to the height value indicates that flexural stress controls the allowable wall height.

Interior Non-Structural Composite

Stud Member	Spacing, in. oc	Fy, ksi	5 psf			7.5 psf			10 psf			15 psf		
			L/120	L/240	L/360	L/120	L/240	L/360	L/120	L/240	L/360	L/120	L/240	L/360
162S125-18	12	33	13'-0" f	11'-1"	9'-10"	10'-8" f	9'-8"	8'-7"	9'-3" f	8'-9"	7'-9"	---	---	---
	16		11'-3" f	10'-1"	8'-11"	9'-3" f	8'-9"	7'-9"	8'-0" f	7'-11"	---	---	---	---
	24		9'-3" f	8'-9"	7'-9"	---	---	---	---	---	---	---	---	---
162S125-27	12	33	14'-9"	11'-8"	10'-2"	12'-10"	10'-2"	8'-7"	11'-8"	9'-1"	7'-6"	8'-6"	---	---
	16		13'-4"	10'-7"	9'-1"	11'-8"	9'-1"	7'-6"	10'-7"	7'-11"	---	---	---	---
	24		11'-8"	9'-1"	---	10'-2"	---	---	9'-1"	---	---	---	---	---
162S125-30	12	33	14'-11"	11'-10"	10'-4"	13'-1"	10'-4"	8'-11"	11'-10"	9'-4"	7'-11"	9'-10" f	7'-11"	---
	16		13'-7"	10'-9"	9'-4"	11'-10"	9'-4"	7'-11"	10'-9"	8'-3"	---	8'-6"	---	---
	24		11'-10"	9'-4"	7'-11"	10'-4"	7'-11"	---	9'-4"	---	---	---	---	---
250S125-18	12	33	16'-4" f	14'-2"	12'-9"	13'-4" f	12'-4"	11'-2"	11'-7" f	11'-3"	10'-2"	---	---	---
	16		14'-2" f	12'-10"	11'-7"	11'-7" f	11'-3"	10'-2"	10'-0" f	10'-0" f	9'-0"	---	---	---
	24		11'-7" f	11'-3"	10'-2"	9'-5" f	9'-5" f	8'-6"	8'-2" f	8'-2" f	---	---	---	---
250S125-27	12	33	18'-7"	15'-4"	13'-9"	16'-3"	13'-5"	11'-12"	14'-9"	12'-2"	10'-11"	10'-6" f	10'-6" f	9'-4" f
	16		16'-10"	13'-11"	12'-5"	14'-9"	12'-2"	10'-11"	13'-5"	11'-1"	9'-11"	9'-1" f	9'-1" f	8'-1" f
	24		14'-9"	12'-2"	10'-11"	12'-11"	10'-8"	9'-4"	11'-3" f	9'-8"	8'-1"	---	---	---
250S125-30	12	33	18'-5"	15'-10"	14'-1"	16'-1"	13'-10"	12'-4"	14'-7"	12'-7"	11'-2"	11'-0" f	11'-0" f	9'-9" f
	16		16'-9"	14'-5"	12'-10"	14'-7"	12'-7"	11'-2"	13'-3"	11'-5"	10'-2"	9'-6" f	9'-6" f	8'-8" f
	24		14'-7"	12'-7"	11'-2"	12'-9"	11'-0"	9'-9"	11'-7"	10'-0"	8'-8"	7'-9" f	7'-9" f	---
250S125-33	12	33	19'-8"	15'-8"	13'-8"	17'-3"	13'-8"	11'-11"	15'-8"	12'-5"	10'-10"	11'-5" f	10'-10"	9'-5" f
	16		17'-11"	14'-3"	12'-5"	15'-8"	12'-5"	10'-10"	14'-3"	11'-3"	9'-10"	9'-11" f	9'-10"	8'-4" f
	24		15'-8"	12'-5"	10'-10"	13'-8"	10'-10"	9'-5"	12'-4"	9'-10"	8'-4"	8'-1" f	8'-1" f	---
350S125-18	12	33	18'-3" f	16'-4"	14'-4"	14'-11" f	14'-4"	12'-6"	12'-11" f	12'-11" f	11'-4"	8'-5" f	8'-5" f	8'-5" f
	16		15'-10" f	14'-10"	13'-0"	12'-11" f	12'-11" f	11'-4"	11'-2" f	11'-2" f	10'-3"	---	---	---
	24		12'-11" f	12'-11" f	11'-4"	10'-7" f	10'-7" f	9'-11"	9'-2" f	9'-2" f	9'-0"	---	---	---
350S125-27	12	33	22'-6"	17'-11"	15'-7"	19'-8"	15'-7"	13'-8"	17'-11"	14'-2"	12'-4"	12'-0" f	12'-0" f	10'-8" f
	16		20'-6"	16'-3"	14'-2"	17'-11"	14'-2"	12'-4"	15'-10" f	12'-11"	11'-2"	10'-5" f	10'-5" f	---
	24		17'-11"	14'-2"	12'-4"	14'-11" f	12'-4"	10'-8"	12'-11" f	11'-2"	---	---	---	---
350S125-30	12	33	22'-6"	17'-11"	15'-8"	19'-8"	15'-8"	13'-8"	17'-11"	14'-2"	12'-4"	12'-10" f	12'-4"	10'-7" f
	16		20'-6"	16'-3"	14'-2"	17'-11"	14'-2"	12'-4"	16'-3"	12'-11"	11'-1"	11'-1" f	11'-1" f	---
	24		17'-11"	14'-2"	12'-4"	15'-8"	12'-4"	10'-7"	13'-9" f	11'-1"	---	---	---	---
350S125-33	12	33	23'-0"	18'-3"	15'-11"	20'-1"	15'-11"	13'-11"	18'-3"	14'-6"	12'-8"	13'-3" f	12'-8"	10'-10"
	16		20'-11"	16'-7"	14'-6"	18'-3"	14'-6"	12'-8"	16'-7"	13'-2"	11'-4"	11'-6" f	11'-4"	9'-8" f
	24		18'-3"	14'-6"	12'-8"	15'-11"	12'-8"	10'-10"	14'-4" f	11'-4"	9'-8"	---	---	---
362S125-18	12	33	18'-8" f	16'-8"	14'-7"	15'-3" f	14'-7"	12'-9"	13'-2" f	13'-2" f	11'-6"	8'-8" f	8'-8" f	8'-8" f
	16		16'-2" f	15'-2"	13'-3"	13'-2" f	13'-2" f	11'-6"	11'-5" f	11'-5" f	10'-4"	---	---	---
	24		13'-2" f	13'-2" f	11'-6"	10'-9" f	10'-9" f	9'-11"	9'-4" f	9'-4" f	8'-11"	---	---	---
362S125-27	12	33	22'-10"	18'-2"	15'-10"	19'-11"	15'-10"	13'-10"	18'-2"	14'-5"	12'-6"	12'-0" f	12'-0" f	10'-7" f
	16		20'-9"	16'-6"	14'-5"	18'-2"	14'-5"	12'-6"	15'-9" f	13'-1"	12'-2"	10'-5" f	10'-5" f	---
	24		18'-2"	14'-5"	12'-6"	14'-11" f	12'-6"	10'-7"	12'-11" f	11'-1"	---	---	---	---
362S125-30	12	33	22'-10"	18'-3"	16'-4"	19'-11"	16'-0"	14'-3"	18'-1"	14'-6"	12'-11"	12'-8" f	12'-8" f	10'-11" f
	16		20'-8"	16'-7"	14'-10"	18'-1"	14'-6"	12'-11"	16'-5"	13'-2"	11'-6"	11'-0" f	11'-0" f	---
	24		18'-1"	14'-6"	12'-11"	15'-9" f	12'-8"	10'-11"	13'-8" f	11'-4"	---	---	---	---
362S125-33	12	33	24'-2"	19'-2"	16'-9"	21'-1"	16'-9"	14'-8"	19'-2"	15'-3"	13'-4"	13'-5" f	13'-4"	11'-4"
	16		21'-11"	17'-5"	15'-3"	19'-2"	15'-3"	13'-4"	17'-5"	13'-10"	11'-11"	11'-8" f	11'-8" f	10'-1" f
	24		19'-2"	15'-3"	13'-4"	16'-8" f	13'-4"	11'-4"	14'-5" f	11'-11"	10'-1"	---	---	---
400S125-18	12	33	19'-3" f	17'-6"	15'-4"	15'-9" f	15'-4"	13'-4"	13'-8" f	13'-8" f	12'-2"	8'-11" f	8'-11" f	8'-11" f
	16		16'-8" f	15'-11"	13'-11"	13'-8" f	13'-8" f	12'-2"	11'-10" f	11'-10" f	11'-0"	7'-9" f	7'-9" f	7'-9" f
	24		13'-8" f	13'-8" f	12'-2"	11'-2" f	11'-2" f	10'-7"	9'-8" f	9'-8" f	9'-7"	---	---	---
400S125-27	12	33	24'-6"	19'-5"	17'-0"	21'-5"	17'-0"	14'-10"	18'-8" f	15'-5"	13'-6"	12'-3" f	12'-3" f	11'-8" f
	16		22'-3"	17'-8"	15'-5"	18'-8" f	15'-5"	13'-6"	16'-2" f	14'-0"	12'-2"	10'-8" f	10'-8" f	10'-6" f
	24		18'-8" f	15'-5"	13'-6"	15'-3" f	13'-6"	11'-8"	13'-3" f	12'-2"	10'-6"	---	---	---

Limiting Wall Height Tables - Composite

Interior Non-Structural Composite

Stud Member	Spacing, in, oc	Fy, ksi	5 psf			7.5 psf			10 psf			15 psf		
			L/120	L/240	L/360	L/120	L/240	L/360	L/120	L/240	L/360	L/120	L/240	L/360
400S125-30	12	33	24'-6"	19'-5"	17'-0"	21'-5"	17'-0"	14'-10"	19'-5"	15'-5"	13'-6"	13'-2"	13'-2"	11'-7"
	16		22'-3"	17'-8"	15'-5"	19'-5"	15'-5"	13'-6"	17'-5"	f	14'-0"	12'-2"	11'-5"	f
	24		19'-5"	15'-5"	13'-6"	16'-5"	f	13'-6"	14'-2"	f	12'-2"	10'-4"	---	---
400S125-33	12	33	25'-3"	20'-1"	17'-6"	22'-1"	17'-6"	20'-1"	20'-1"	15'-11"	13'-11"	13'-11"	f	13'-11"
	16		22'-11"	18'-3"	15'-11"	20'-1"	15'-11"	18'-3"	18'-3"	14'-5"	12'-7"	12'-1"	f	12'-1"
	24		20'-1"	15'-11"	13'-11"	17'-3"	f	13'-11"	15'-0"	f	12'-7"	10'-9"	9'-10"	f
550S125-18	12	33	21'-11"	f	21'-11"	f	21'-10"	17'-10"	15'-6"	f	15'-6"	f	15'-6"	f
	16		14'-6"	f	19'-0"	f	17'-9"	15'-6"	13'-5"	f	13'-5"	f	13'-5"	f
	24		11'-10"	f	15'-6"	f	15'-6"	12'-8"	---	---	---	---	---	---
550S125-27	12	33	30'-4"	24'-8"	21'-10"	26'-9"	f	21'-10"	23'-2"	f	20'-0"	17'-8"	---	---
	16		27'-11"	22'-8"	20'-0"	23'-2"	f	20'-0"	20'-1"	f	18'-4"	16'-0"	---	---
	24		23'-2"	f	20'-0"	18'-11"	f	17'-8"	16'-5"	f	16'-0"	---	---	---
550S125-30	12	33	30'-5"	24'-10"	22'-0"	27'-0"	22'-0"	19'-5"	24'-10"	20'-2"	17'-10"	16'-4"	f	16'-4"
	16		28'-0"	22'-9"	20'-2"	24'-10"	f	20'-2"	21'-7"	f	18'-6"	16'-2"	---	---
	24		24'-10"	20'-2"	17'-10"	20'-4"	f	17'-10"	17'-7"	f	16'-2"	---	---	---
600S125-18	12	33	23'-2"	f	22'-9"	18'-11"	f	18'-11"	16'-4"	f	16'-4"	f	15'-10"	---
	16		20'-1"	f	20'-1"	16'-4"	f	16'-4"	14'-2"	f	14'-2"	f	14'-2"	---
	24		16'-4"	f	16'-4"	13'-4"	f	13'-4"	---	---	---	---	---	---
600S125-27	12	33	32'-5"	f	26'-9"	23'-5"	26'-5"	f	22'-11"	f	21'-3"	16'-10"	---	---
	16		28'-1"	f	24'-4"	21'-3"	22'-11"	f	19'-10"	f	19'-4"	14'-7"	---	---
	24		22'-11"	f	21'-3"	18'-7"	18'-8"	f	16'-2"	f	16'-2"	---	---	---
600S125-30	12	33	34'-2"	27'-1"	23'-8"	28'-11"	f	23'-8"	25'-0"	f	21'-6"	18'-9"	16'-5"	f
	16		30'-8"	f	24'-7"	25'-0"	f	21'-6"	21'-8"	f	19'-6"	17'-1"	---	---
	24		25'-0"	f	21'-6"	20'-5"	f	18'-9"	17'-8"	f	17'-1"	---	---	---
600S125-33	12	33	35'-4"	28'-1"	24'-6"	30'-10"	24'-6"	21'-5"	27'-10"	f	22'-3"	19'-5"	18'-4"	f
	16		32'-1"	f	25'-6"	27'-10"	f	22'-3"	24'-1"	f	20'-3"	17'-8"	15'-10"	f
	24		27'-10"	f	22'-3"	22'-9"	f	19'-5"	19'-8"	f	17'-8"	---	---	---

See Interior Non-Structural Composite Table Notes

Limiting Wall Height Tables - Non-Composite

Interior Non-Structural Non-Composite Table Notes

1. 5 psf, 7.5 psf, and 10 psf loads have NOT been reduced for strength or deflection checks. Full lateral load is applied.
2. Calculated properties are based on AISI S100-16/S1-18, North American Specification for Cold-Formed Steel Structural Members with Supplement 1.
3. Limiting heights are based on continuous support of each flange over the full length of the stud.
4. Limiting heights are based on steel properties only (non-composite).
5. Web crippling checks are based on end-one flange loading condition using 1-inch end bearing.
6. Limiting heights are based on continuous support of each flange over the full length of the stud.

Interior Non-Structural Non-Composite

Stud Member	Spacing, in, oc	Fy, ksi	5 psf			7.5 psf			10 psf		
			L/120	L/240	L/360	L/120	L/240	L/360	L/120	L/240	L/360
162S125-18	12	33	9'-1"	7'-4"	6'-5"	7'-5"	6'-5"	5'-7"	6'-5"	5'-10"	5'-1"
	16		7'-10"	6'-8"	5'-10"	6'-5"	5'-10"	5'-1"	5'-7"	5'-3"	4'-7"
	24		6'-5"	5'-10"	5'-1"	5'-3"	5'-1"	4'-5"	4'-6"	4'-6"	4'-0"
162S125-27	12	33	10'-10"	8'-7"	7'-6"	9'-5"	7'-6"	6'-6"	8'-4"	6'-10"	5'-11"
	16		9'-10"	7'-9"	6'-10"	8'-4"	6'-10"	5'-11"	7'-3"	6'-2"	5'-5"
	24		8'-4"	6'-10"	5'-11"	6'-10"	5'-11"	5'-2"	5'-11"	5'-5"	4'-9"
162S125-30	12	33	11'-3"	8'-11"	7'-9"	9'-10"	7'-9"	6'-9"	8'-11"	7'-1"	6'-2"
	16		10'-2"	8'-1"	7'-1"	8'-11"	7'-1"	6'-2"	7'-9"	6'-5"	5'-7"
	24		8'-11"	7'-1"	6'-2"	7'-4"	6'-2"	5'-5"	6'-4"	5'-7"	4'-11"
162S125-33	12	33	11'-8"	9'-3"	8'-1"	10'-2"	8'-1"	7'-1"	9'-3"	7'-4"	6'-5"
	16		10'-7"	8'-5"	7'-4"	9'-3"	7'-4"	6'-5"	8'-4"	6'-8"	5'-10"
	24		9'-3"	7'-4"	6'-5"	7'-10"	6'-5"	5'-7"	6'-9"	5'-10"	5'-1"
250S125-18	12	33	12'-4"	10'-3"	8'-11"	10'-1"	8'-11"	7'-10"	8'-9"	8'-1"	7'-1"
	16		10'-8"	9'-4"	8'-1"	8'-9"	8'-1"	7'-1"	7'-7"	7'-5"	6'-5"
	24		8'-9"	8'-1"	7'-1"	7'-1"	7'-1"	6'-2"	6'-2"	6'-2"	5'-8"
250S125-27	12	33	15'-1"	11'-11"	10'-5"	12'-11"	10'-5"	9'-1"	11'-3"	9'-6"	8'-11"
	16		13'-8"	10'-10"	9'-6"	11'-3"	9'-6"	8'-3"	9'-9"	8'-7"	7'-6"
	24		11'-3"	9'-6"	8'-3"	9'-2"	8'-3"	7'-3"	7'-11"	7'-6"	6'-7"
250S125-30	12	33	15'-7"	12'-5"	10'-10"	13'-8"	10'-10"	9'-6"	11'-11"	9'-10"	8'-7"
	16		14'-2"	11'-3"	9'-10"	11'-11"	9'-10"	8'-7"	10'-4"	8'-11"	7'-10"
	24		11'-11"	9'-10"	8'-7"	9'-9"	8'-7"	7'-6"	8'-5"	7'-10"	6'-10"
250S125-33	12	33	16'-3"	12'-11"	11'-3"	14'-2"	11'-3"	9'-10"	12'-9"	10'-3"	8'-11"
	16		14'-9"	11'-9"	10'-3"	12'-9"	10'-3"	8'-11"	11'-1"	9'-4"	8'-2"
	24		12'-9"	10'-3"	8'-11"	10'-5"	8'-11"	7'-10"	9'-0"	8'-2"	7'-1"
250S125-43	12	33	18'-0"	14'-3"	12'-6"	15'-9"	12'-6"	10'-11"	14'-3"	11'-4"	9'-11"
	16		16'-4"	13'-0"	11'-4"	14'-3"	11'-4"	9'-11"	13'-0"	10'-4"	9'-0"
	24		14'-3"	11'-4"	9'-11"	12'-5"	9'-11"	8'-8"	10'-9"	9'-0"	7'-10"
250S125-54	12	33	19'-3"	15'-3"	13'-4"	16'-10"	13'-4"	11'-8"	15'-3"	12'-2"	10'-7"
	16		17'-6"	13'-11"	12'-2"	15'-3"	12'-2"	10'-7"	13'-11"	11'-0"	9'-8"
	24		15'-3"	12'-2"	10'-7"	13'-4"	10'-7"	9'-3"	11'-11"	9'-8"	8'-5"
350S125-18	12	33	14'-0"	12'-10"	11'-2"	11'-6"	11'-2"	9'-9"	9'-11"	9'-11"	8'-11"
	16		12'-2"	11'-8"	10'-2"	9'-11"	9'-11"	8'-11"	8'-7"	8'-7"	8'-1"
	24		9'-11"	9'-11"	8'-11"	8'-1"	8'-1"	7'-9"	7'-0"	7'-0"	7'-0"
350S125-27	12	33	18'-10"	15'-2"	13'-3"	15'-5"	13'-3"	11'-7"	13'-4"	12'-1"	10'-6"
	16		16'-4"	13'-10"	12'-1"	13'-4"	12'-1"	10'-6"	11'-7"	11'-0"	9'-7"
	24		13'-4"	12'-1"	10'-6"	10'-11"	10'-6"	9'-2"	9'-5"	9'-5"	8'-4"
350S125-30	12	33	19'-11"	15'-10"	13'-10"	16'-6"	13'-10"	12'-1"	14'-4"	12'-7"	11'-0"
	16		17'-6"	14'-5"	12'-7"	14'-4"	12'-7"	11'-0"	12'-5"	11'-5"	10'-0"
	24		14'-4"	12'-7"	11'-0"	11'-8"	11'-0"	9'-7"	10'-1"	10'-0"	8'-9"
350S125-33	12	33	20'-10"	16'-6"	14'-5"	17'-10"	14'-5"	12'-7"	15'-5"	13'-1"	11'-5"
	16		18'-11"	15'-0"	13'-1"	15'-5"	13'-1"	11'-5"	13'-4"	11'-11"	10'-5"
	24		15'-5"	13'-1"	11'-5"	12'-7"	11'-5"	10'-0"	10'-11"	10'-5"	9'-1"
350S125-43	12	33	23'-2"	18'-5"	16'-1"	20'-3"	16'-1"	14'-0"	18'-5"	14'-7"	12'-9"
	16		21'-1"	16'-9"	14'-7"	18'-5"	14'-7"	12'-9"	16'-2"	13'-3"	11'-7"
	24		18'-5"	14'-7"	12'-9"	15'-3"	12'-9"	11'-2"	13'-3"	11'-7"	10'-1"
350S125-54	12	33	24'-10"	19'-9"	17'-3"	21'-9"	17'-3"	15'-1"	19'-9"	15'-8"	13'-8"
	16		22'-7"	17'-11"	15'-8"	19'-9"	15'-8"	13'-8"	17'-11"	14'-3"	12'-5"
	24		19'-9"	15'-8"	13'-8"	17'-1"	13'-8"	11'-11"	14'-10"	12'-5"	10'-10"
362S125-18	12	33	14'-4"	13'-2"	11'-6"	11'-8"	11'-6"	10'-0"	10'-1"	10'-1"	9'-1"
	16		12'-5"	11'-11"	10'-5"	10'-1"	10'-1"	9'-1"	8'-9"	8'-9"	8'-3"
	24		10'-1"	10'-1"	9'-1"	8'-3"	8'-3"	8'-0"	7'-2"	7'-2"	7'-2"
362S125-27	12	33	19'-3"	15'-7"	13'-8"	15'-9"	13'-8"	11'-11"	13'-7"	12'-5"	10'-10"
	16		16'-8"	14'-2"	12'-5"	13'-7"	12'-5"	10'-10"	11'-9"	11'-3"	9'-10"
	24		13'-7"	12'-5"	10'-10"	11'-1"	10'-10"	9'-5"	9'-8"	9'-8"	8'-7"
362S125-30	12	33	20'-6"	16'-3"	14'-2"	16'-11"	14'-2"	12'-5"	14'-7"	12'-11"	11'-3"
	16		17'-11"	14'-9"	12'-11"	14'-7"	12'-11"	11'-3"	12'-8"	11'-9"	10'-3"
	24		14'-7"	12'-11"	11'-3"	11'-11"	11'-3"	9'-10"	10'-4"	10'-3"	8'-11"
362S125-33	12	33	21'-5"	17'-0"	14'-10"	18'-3"	14'-10"	12'-11"	15'-9"	13'-6"	11'-9"
	16		19'-4"	15'-5"	13'-6"	15'-9"	13'-6"	11'-9"	13'-8"	12'-3"	10'-8"
	24		15'-9"	13'-6"	11'-9"	12'-11"	11'-9"	10'-3"	11'-2"	10'-8"	9'-4"

Limiting Wall Height Tables - Non-Composite

Interior Non-Structural Non-Composite

Stud Member	Spacing, in, oc	Fy, ksi	5 psf			7.5 psf			10 psf		
			L/120	L/240	L/360	L/120	L/240	L/360	L/120	L/240	L/360
362S125-43	12	33	23'-10"	18'-11"	16'-6"	20'-10"	16'-6"	14'-5"	18'-11"	15'-0"	13'-1"
	16		21'-8"	17'-2"	15'-0"	18'-11"	15'-0"	13'-1"	16'-7"	13'-8"	11'-11"
	24		18'-11"	15'-0"	13'-1"	15'-7"	13'-1"	11'-5"	13'-6"	11'-11"	10'-5"
362S125-54	12	33	25'-7"	20'-4"	17'-9"	22'-4"	17'-9"	15'-6"	20'-4"	16'-1"	14'-1"
	16		23'-3"	18'-5"	16'-1"	20'-4"	16'-1"	14'-1"	18'-5"	14'-8"	12'-10"
	24		20'-4"	16'-1"	14'-1"	17'-6"	14'-1"	12'-4"	15'-2"	12'-10"	11'-2"
400S125-18 ¹	12	33	13'-10"	13'-10"	12'-4"	11'-3"	11'-3"	10'-9"	9'-9"	9'-9"	9'-9"
	16		12'-0"	12'-0"	11'-3"	9'-9"	9'-9"	9'-9"	8'-6"	8'-6"	8'-6"
	24		9'-9"	9'-9"	9'-9"	8'-0"	8'-0"	8'-0"	6'-11"	6'-11"	6'-11"
400S125-27	12	33	20'-5"	16'-10"	14'-8"	16'-8"	14'-8"	12'-10"	14'-5"	13'-4"	11'-8"
	16		17'-8"	15'-3"	13'-4"	14'-5"	13'-4"	11'-8"	12'-6"	12'-2"	10'-7"
	24		14'-5"	13'-4"	11'-8"	11'-9"	11'-8"	10'-2"	10'-2"	10'-2"	9'-3"
400S125-30	12	33	21'-11"	17'-6"	15'-4"	17'-11"	15'-4"	13'-5"	15'-6"	13'-11"	12'-2"
	16		19'-0"	15'-11"	13'-11"	15'-6"	13'-11"	12'-2"	13'-5"	12'-8"	11'-1"
	24		15'-6"	13'-11"	12'-2"	12'-8"	12'-2"	10'-7"	11'-0"	11'-0"	9'-8"
400S125-33	12	33	23'-1"	18'-4"	16'-0"	19'-4"	16'-0"	14'-0"	16'-9"	14'-6"	12'-8"
	16		20'-6"	16'-8"	14'-6"	16'-9"	14'-6"	12'-8"	14'-6"	13'-2"	11'-6"
	24		16'-9"	14'-6"	12'-8"	13'-8"	12'-8"	11'-1"	11'-10"	11'-6"	10'-1"
400S125-43	12	33	25'-9"	20'-5"	17'-10"	22'-6"	17'-10"	15'-7"	20'-4"	16'-3"	14'-2"
	16		23'-5"	18'-7"	16'-3"	20'-4"	16'-3"	14'-2"	17'-7"	14'-9"	12'-10"
	24		20'-4"	16'-3"	14'-2"	16'-7"	14'-2"	12'-4"	14'-5"	12'-10"	11'-3"
400S125-54	12	33	27'-8"	22'-0"	19'-2"	24'-2"	19'-2"	16'-9"	22'-0"	17'-5"	15'-3"
	16		25'-2"	20'-0"	17'-5"	22'-0"	17'-5"	15'-3"	19'-10"	15'-10"	13'-10"
	24		22'-0"	17'-5"	15'-3"	18'-9"	15'-3"	13'-4"	16'-3"	13'-10"	12'-1"
550S125-18 ²	12	33	16'-11"	16'-11"	15'-9"	13'-9"	13'-9"	13'-9"	11'-11"	11'-11"	11'-11"
	16		14'-7"	14'-7"	14'-4"	11'-11"	11'-11"	11'-11"	10'-4"	10'-4"	10'-4"
	24		11'-11"	11'-11"	11'-11"	9'-9"	9'-9"	9'-9"	8'-5"	8'-5"	8'-5"
550S125-27	12	33	25'-0"	21'-7"	18'-10"	20'-5"	18'-10"	16'-6"	17'-8"	17'-2"	15'-0"
	16		21'-8"	19'-7"	17'-2"	17'-8"	17'-2"	15'-0"	15'-4"	15'-4"	13'-7"
	24		17'-8"	17'-2"	15'-0"	14'-5"	14'-5"	13'-1"	12'-6"	12'-6"	11'-11"
550S125-30	12	33	26'-11"	22'-6"	19'-8"	22'-0"	19'-8"	17'-2"	19'-0"	17'-10"	15'-7"
	16		23'-4"	20'-5"	17'-10"	19'-0"	17'-10"	15'-7"	16'-6"	16'-3"	14'-2"
	24		19'-0"	17'-10"	15'-7"	15'-7"	15'-7"	13'-8"	13'-6"	13'-6"	12'-5"
550S125-33	12	33	29'-1"	23'-6"	20'-7"	23'-9"	20'-7"	17'-11"	20'-7"	18'-8"	16'-4"
	16		25'-2"	21'-4"	18'-8"	20'-7"	18'-8"	16'-4"	17'-10"	17'-0"	14'-10"
	24		20'-7"	18'-8"	16'-4"	16'-10"	16'-4"	14'-3"	14'-7"	14'-7"	12'-11"
550S125-43	12	33	33'-3"	26'-5"	23'-1"	29'-1"	23'-1"	20'-2"	25'-5"	20'-11"	18'-4"
	16		30'-3"	24'-0"	20'-11"	25'-5"	20'-11"	18'-4"	22'-1"	19'-1"	16'-8"
	24		25'-5"	20'-11"	18'-4"	20'-9"	18'-4"	16'-0"	18'-0"	16'-8"	14'-6"
550S125-54	12	33	35'-11"	28'-6"	24'-11"	31'-5"	24'-11"	21'-9"	28'-6"	22'-8"	19'-9"
	16		32'-8"	25'-11"	22'-8"	28'-6"	22'-8"	19'-9"	25'-2"	20'-7"	18'-0"
	24		28'-6"	22'-8"	19'-9"	23'-9"	19'-9"	17'-3"	20'-7"	18'-0"	15'-8"
600S125-18 ²	12	33	17'-8"	17'-8"	16'-10"	14'-5"	14'-5"	14'-5"	12'-6"	12'-6"	12'-6"
	16		15'-4"	15'-4"	15'-3"	12'-6"	12'-6"	12'-6"	10'-10"	10'-10"	10'-10"
	24		12'-6"	12'-6"	12'-6"	10'-3"	10'-3"	10'-3"	8'-2"	8'-2"	8'-2"
600S125-27 ¹	12	33	24'-0"	23'-0"	20'-1"	19'-7"	19'-7"	17'-7"	17'-0"	17'-0"	16'-0"
	16		20'-10"	20'-10"	18'-3"	17'-0"	17'-0"	16'-0"	14'-8"	14'-8"	14'-6"
	24		17'-0"	17'-0"	16'-0"	13'-10"	13'-10"	13'-10"	12'-0"	12'-0"	12'-0"
600S125-30	12	33	28'-3"	24'-0"	21'-0"	23'-1"	21'-0"	18'-4"	20'-0"	19'-1"	16'-8"
	16		24'-6"	21'-10"	19'-1"	20'-0"	19'-1"	16'-8"	17'-4"	17'-4"	15'-2"
	24		20'-0"	19'-1"	16'-8"	16'-4"	16'-4"	14'-7"	14'-2"	14'-2"	13'-3"
600S125-33	12	33	30'-7"	25'-2"	22'-0"	25'-0"	22'-0"	19'-2"	21'-7"	19'-11"	17'-5"
	16		26'-6"	22'-10"	19'-11"	21'-7"	19'-11"	17'-5"	18'-9"	18'-2"	15'-10"
	24		21'-7"	19'-11"	17'-5"	17'-8"	17'-5"	15'-3"	15'-3"	15'-3"	13'-10"
600S125-43	12	33	35'-7"	28'-3"	24'-8"	30'-11"	24'-8"	21'-7"	26'-9"	22'-5"	19'-7"
	16		32'-4"	25'-8"	22'-5"	26'-9"	22'-5"	19'-7"	23'-2"	20'-4"	17'-10"
	24		26'-9"	22'-5"	19'-7"	21'-10"	19'-7"	17'-1"	18'-11"	17'-10"	15'-7"
600S125-54	12	33	38'-7"	30'-7"	26'-9"	33'-8"	26'-9"	23'-4"	30'-7"	24'-4"	21'-3"
	16		35'-1"	27'-10"	24'-4"	30'-7"	24'-4"	21'-3"	26'-8"	22'-1"	19'-3"
	24		30'-7"	24'-4"	21'-3"	25'-2"	21'-3"	18'-7"	21'-9"	19'-3"	16'-10"
800S125-33 ¹	12	33	32'-11"	31'-3"	27'-4"	26'-10"	26'-10"	23'-10"	23'-3"	23'-3"	21'-8"
	16		28'-6"	28'-5"	24'-10"	23'-3"	23'-3"	21'-8"	20'-2"	20'-2"	19'-8"
	24		23'-3"	23'-3"	21'-8"	19'-0"	19'-0"	18'-11"	16'-5"	16'-5"	16'-5"
800S125-43	12	33	44'-5"	35'-3"	30'-9"	36'-4"	30'-9"	26'-11"	31'-5"	28'-0"	24'-5"
	16		38'-6"	32'-0"	28'-0"	31'-5"	28'-0"	24'-5"	27'-3"	25'-5"	22'-2"
	24		31'-5"	28'-0"	24'-5"	25'-8"	24'-5"	21'-4"	22'-3"	22'-2"	19'-5"
800S125-54	12	33	48'-5"	38'-5"	33'-7"	42'-3"	33'-7"	29'-4"	36'-7"	30'-6"	26'-8"
	16		44'-0"	34'-11"	30'-6"	36'-7"	30'-6"	26'-8"	31'-9"	27'-8"	24'-2"
	24		36'-7"	30'-6"	26'-8"	29'-11"	26'-8"	23'-3"	25'-11"	24'-2"	21'-2"

See Interior Non-Structural Non-Composite Table Notes

Limiting Wall Heights - Curtain Wall 1-span

Wall Height Table Notes

1. Lateral loads have not been modified for strength checks: full loads are applied.
2. Calculated properties are based on AISI S100-16/S1-18, North American Specification for Cold-Formed Steel Structural Members with Supplement 1.
3. The 5 psf live load has not been reduced for deflection checks. For 15 psf or higher wind pressure, read the note below.
IBC 2012/ASCE 7-10: Due to the change in the model building codes, design wind pressures determined using IBC 2012/ASCE 7-10 are strength level loads (LRFD) in comparison to those determined in earlier IBC codes which were service level loads (ASD). The load/span tables that follow are based on service level (ASD) wind loads. Therefore, to properly use the load/span tables in this catalog, multiply the IBC 2012/ASCE 7-10 design wind pressures by 0.6 (Reference section 2.4 ASCE 7-10) prior to entering the load/span tables.

- Example:
 * ASCE 7-10 Calculated Design Wind Pressure = 25 psf (Strength level loads, LRFD)
 * Convert to service level loads (ASD) = $25 \text{ psf} \times 0.6 = 15 \text{ psf}$
 * Use 15 psf as the Pressure Value used in this Table to determine the member span
Any Other Building Code: The load/span tables that follow are based on service level (ASD) wind loads. If the wind load being used meets this criterion, it does not need to be modified prior to using the tables.
3. 15 psf and higher wind pressures have been multiplied by 0.7 for deflection determination, in accordance with footnote f of IBC table 1604.3. The 5 psf live load has not been reduced for deflection checks.
4. Limiting heights are based on continuous support of each flange over the full length of the stud.
5. Limiting heights are based on steel properties alone (non-composite).
6. Web crippling checks are based on end-one flange loading condition using 1-inch end bearing.
7. End shear and web crippling capacity have not been reduced for punchouts. Punchouts are assumed to be atleast 10-inches from the end of members, in accordance with ASTM C955, section 4.6.
8. Where limiting heights are followed by "e", web stiffeners are required.

Limiting Wall Heights - Curtain Wall 1-span

Wall Height Table Notes

See Page 21 for detailed Table Notes for Curtain Wall 1-Span Limiting Wall Heights

Stud Member	Spacing, in, oc	Fy, ksi	5 psf			15 psf			20 psf			25 psf			30 psf			35 psf			40 psf		
			L/120	L/240	L/360	L/240	L/360	L/600	L/240	L/360	L/600	L/240	L/360	L/600	L/240	L/360	L/600	L/240	L/360	L/600	L/240	L/360	L/600
250S137-33	12	33	17'-4"	13'-9"	12'-0"	10'-9"	9'-5"	7'-11"	9'-9"	8'-6"	7'-2"	9'-1"	7'-11"	6'-8"	8'-3"	7'-5"	6'-3"	7'-8"	7'-1"	6'-0"	7'-2"	6'-9"	5'-8"
	16		15'-9"	12'-6"	10'-11"	9'-9"	8'-6"	7'-2"	8'-10"	7'-9"	6'-6"	7'-10"	7'-2"	6'-1"	7'-2"	6'-9"	5'-9"	6'-8"	6'-5"	5'-5"	6'-3"	6'-2"	5'-2"
	24		13'-9"	10'-11"	9'-7"	8'-3"	7'-5"	6'-3"	7'-2"	6'-9"	5'-9"	6'-5"	6'-3"	5'-4"	5'-10"	5'-10"	5'-0"	5'-5"	5'-5"	4'-9"	5'-1"	5'-1"	4'-6"
250S137-43	12	33	18'-11"	15'-0"	13'-2"	11'-9"	10'-3"	8'-8"	10'-8"	9'-4"	7'-10"	9'-11"	8'-8"	7'-4"	9'-4"	8'-2"	6'-10"	8'-10"	7'-9"	6'-6"	8'-5"	7'-5"	6'-3"
	16		17'-2"	13'-8"	11'-11"	10'-8"	9'-4"	7'-10"	9'-8"	8'-6"	7'-2"	9'-0"	7'-10"	6'-8"	8'-5"	7'-5"	6'-3"	7'-10"	7'-0"	5'-11"	7'-3"	6'-9"	5'-8"
	24		15'-0"	11'-11"	10'-5"	9'-4"	8'-2"	6'-10"	8'-5"	7'-5"	6'-3"	7'-6"	6'-10"	5'-9"	6'-10"	6'-6"	5'-5"	6'-4"	6'-2"	5'-2"	5'-11"	5'-10"	4'-11"
250S137-54	12	33	20'-3"	16'-1"	14'-0"	12'-7"	11'-0"	9'-3"	11'-5"	10'-0"	8'-5"	10'-7"	9'-3"	7'-10"	10'-0"	8'-8"	7'-4"	9'-6"	8'-3"	7'-0"	9'-1"	7'-11"	6'-8"
	16		18'-5"	14'-7"	12'-9"	11'-5"	10'-0"	8'-5"	10'-4"	9'-1"	7'-8"	9'-7"	8'-5"	7'-1"	8'-7"	7'-11"	6'-8"	8'-7"	7'-6"	6'-4"	8'-3"	7'-2"	6'-1"
	24		16'-1"	12'-9"	11'-2"	10'-0"	8'-8"	7'-4"	9'-1"	7'-11"	6'-8"	8'-5"	7'-4"	6'-2"	7'-11"	6'-11"	5'-10"	7'-5"	6'-7"	5'-6"	6'-11"	6'-3"	5'-3"
250S137-54	12	50	20'-2"	16'-0"	14'-0"	12'-6"	10'-11"	9'-2"	11'-4"	9'-11"	8'-4"	10'-6"	9'-2"	7'-9"	9'-11"	8'-8"	7'-4"	9'-5"	8'-3"	6'-11"	9'-0"	7'-10"	6'-8"
	16		18'-4"	14'-6"	12'-8"	11'-4"	9'-11"	8'-4"	10'-4"	9'-0"	7'-7"	9'-7"	8'-4"	7'-1"	9'-0"	7'-10"	6'-8"	8'-7"	7'-6"	6'-4"	8'-2"	7'-2"	6'-0"
	24		16'-0"	12'-8"	11'-1"	9'-11"	8'-8"	7'-4"	9'-0"	7'-10"	6'-8"	8'-4"	7'-4"	6'-2"	7'-10"	6'-10"	5'-10"	7'-6"	6'-6"	5'-6"	7'-2"	6'-3"	5'-3"
250S137-68	12	50	21'-7"	17'-2"	15'-0"	13'-5"	11'-8"	9'-10"	12'-2"	10'-7"	8'-11"	11'-3"	9'-10"	8'-4"	10'-7"	9'-3"	7'-10"	10'-1"	8'-10"	7'-5"	9'-8"	8'-5"	7'-1"
	16		19'-7"	15'-7"	13'-7"	12'-2"	10'-7"	8'-11"	11'-1"	9'-8"	8'-2"	10'-3"	8'-11"	7'-7"	9'-8"	8'-5"	7'-1"	9'-2"	8'-0"	6'-9"	8'-9"	7'-8"	6'-6"
	24		17'-2"	13'-7"	11'-11"	10'-7"	9'-3"	7'-10"	9'-8"	8'-5"	7'-1"	8'-11"	7'-10"	6'-7"	8'-5"	7'-4"	6'-3"	8'-0"	7'-0"	5'-11"	7'-8"	6'-8"	5'-8"
250S162-33	12	33	18'-2"	14'-5"	12'-7"	11'-3"	9'-10"	8'-4"	10'-3"	8'-11"	7'-6"	9'-6"	8'-4"	7'-0"	8'-10"	7'-10"	6'-7"	8'-3"	7'-5"	6'-3"	7'-8"	7'-1"	6'-0"
	16		16'-6"	13'-1"	11'-5"	10'-3"	8'-11"	7'-6"	9'-3"	8'-1"	6'-10"	8'-5"	7'-6"	6'-4"	7'-8"	7'-1"	6'-0"	7'-1"	6'-9"	5'-8"	6'-8"	6'-5"	5'-5"
	24		14'-5"	11'-5"	10'-0"	8'-10"	7'-10"	6'-7"	7'-8"	7'-1"	6'-0"	6'-10"	6'-7"	5'-7"	6'-3"	6'-2"	5'-3"	5'-10"	5'-10"	5'-0"	5'-5"	5'-5"	4'-9"
250S162-43	12	33	19'-11"	15'-10"	13'-10"	12'-4"	10'-9"	9'-1"	11'-2"	9'-9"	8'-3"	10'-5"	9'-1"	7'-8"	9'-9"	8'-7"	7'-3"	9'-4"	8'-1"	6'-10"	8'-11"	7'-9"	6'-7"
	16		18'-1"	14'-4"	12'-6"	11'-2"	9'-9"	8'-3"	10'-2"	8'-11"	7'-6"	9'-5"	8'-3"	7'-0"	8'-11"	7'-9"	6'-7"	8'-5"	7'-5"	6'-3"	8'-0"	7'-1"	5'-11"
	24		15'-10"	12'-6"	10'-11"	9'-9"	8'-7"	7'-3"	8'-11"	7'-9"	6'-7"	8'-3"	7'-3"	6'-1"	7'-7"	6'-9"	5'-9"	7'-0"	6'-5"	5'-5"	6'-7"	6'-2"	5'-2"
250S162-54	12	33	21'-3"	16'-11"	14'-9"	13'-2"	11'-6"	9'-9"	12'-0"	10'-6"	8'-10"	11'-2"	9'-9"	8'-2"	10'-6"	9'-2"	7'-9"	9'-11"	8'-8"	7'-4"	9'-6"	8'-4"	7'-0"
	16		19'-4"	15'-4"	13'-5"	12'-0"	10'-6"	8'-10"	10'-11"	9'-6"	8'-0"	10'-1"	8'-10"	7'-5"	9'-6"	8'-4"	7'-0"	9'-0"	7'-11"	6'-8"	8'-8"	7'-7"	6'-4"
	24		16'-11"	13'-5"	11'-9"	10'-6"	9'-2"	7'-9"	9'-6"	8'-4"	7'-0"	8'-10"	7'-9"	6'-6"	8'-4"	7'-3"	6'-1"	7'-11"	6'-11"	5'-10"	7'-5"	6'-7"	5'-7"
250S162-54	12	50	21'-2"	16'-10"	14'-8"	13'-2"	11'-6"	9'-8"	11'-11"	10'-5"	8'-10"	11'-1"	9'-8"	8'-2"	10'-5"	9'-1"	7'-8"	9'-11"	8'-8"	7'-4"	9'-6"	8'-3"	7'-0"
	16		19'-3"	15'-4"	13'-4"	11'-11"	10'-5"	8'-10"	10'-10"	9'-6"	8'-10"	10'-1"	8'-10"	7'-5"	9'-6"	8'-3"	7'-0"	9'-0"	7'-10"	6'-8"	8'-7"	7'-6"	6'-4"
	24		16'-10"	13'-4"	11'-8"	10'-5"	9'-1"	7'-8"	9'-6"	8'-3"	7'-0"	8'-10"	7'-8"	6'-6"	8'-3"	7'-3"	6'-1"	7'-10"	6'-10"	5'-10"	7'-6"	6'-7"	5'-7"
250S162-68	12	50	22'-9"	18'-1"	15'-9"	14'-1"	12'-4"	10'-5"	12'-10"	11'-2"	9'-5"	11'-11"	10'-5"	8'-9"	11'-2"	9'-9"	8'-3"	10'-7"	9'-3"	7'-10"	10'-2"	8'-11"	7'-6"
	16		20'-8"	16'-5"	14'-4"	12'-10"	11'-2"	9'-5"	11'-8"	10'-2"	8'-7"	10'-10"	9'-5"	7'-11"	10'-2"	8'-11"	7'-6"	9'-8"	8'-5"	7'-1"	9'-3"	8'-1"	6'-10"
	24		18'-1"	14'-4"	12'-6"	11'-2"	9'-9"	8'-3"	10'-2"	8'-11"	7'-6"	9'-5"	8'-3"	6'-11"	8'-11"	7'-9"	6'-6"	8'-5"	7'-4"	6'-3"	8'-1"	7'-1"	5'-11"
350S162-33	12	33	23'-3"	18'-6"	16'-2"	14'-5"	12'-7"	10'-8"	13'-1"	11'-5"	9'-8"	11'-10"	10'-8"	9'-0"	10'-9"	10'-0"	8'-5"	10'-0"	9'-6"	8'-0"	9'-4"	9'-1"	7'-8"
	16		21'-2"	16'-9"	14'-8"	13'-1"	11'-5"	9'-8"	10'-3"	10'-5"	8'-9"	11'-5"	10'-5"	8'-2"	9'-4"	8'-5"	7'-8"	8'-0"	8'-8"	7'-3"	8'-1"	8'-1"	7'-0"
	24		18'-6"	14'-8"	12'-10"	10'-9"	10'-0"	8'-5"	9'-4"	9'-1"	7'-8"	8'-4"	8'-4"	7'-1"	7'-7"	7'-7"	6'-8"	7'-1"	7'-1"	6'-4"	6'-7"	6'-7"	6'-1"
350S162-43	12	33	25'-7"	20'-4"	17'-9"	15'-10"	13'-10"	11'-8"	14'-5"	12'-7"	10'-7"	13'-5"	11'-8"	9'-10"	12'-7"	11'-0"	9'-3"	11'-8"	10'-5"	8'-10"	10'-11"	10'-0"	8'-5"
	16		23'-3"	18'-6"	16'-2"	14'-5"	12'-7"	10'-7"	13'-1"	11'-5"	9'-8"	12'-0"	10'-7"	9'-0"	10'-11"	10'-0"	8'-5"	10'-2"	9'-6"	8'-0"	9'-6"	9'-1"	7'-8"
	24		20'-4"	16'-2"	14'-1"	12'-7"	11'-0"	9'-3"	10'-11"	10'-0"	8'-5"	9'-9"	9'-3"	7'-10"	8'-11"	8'-9"	7'-4"	8'-3"	8'-3"	7'-0"	7'-9"	7'-9"	6'-8"
350S162-54	12	33	27'-5"	21'-9"	19'-10"	17'-0"	14'-10"	12'-6"	15'-5"	13'-6"	11'-5"	14'-4"	12'-6"	10'-7"	13'-6"	11'-10"	9'-11"	12'-10"	11'-2"	9'-5"	12'-3"	10'-9"	9'-0"
	16		24'-11"	19'-10"	17'-4"	15'-5"	13'-6"	11'-5"	14'-1"	12'-3"	10'-4"	13'-0"	11'-5"	9'-7"	12'-3"	10'-9"	9'-0"	11'-8"	10'-2"	8'-7"	11'-2"	9'-9"	8'-3"
	24		21'-9"	17'-4"	15'-1"	13'-6"	11'-10"	9'-11"	12'-3"	10'-9"	9'-0"	11'-5"	9'-11"	8'-5"	10'-7"	9'-4"	7'-11"	9'-9"	8'-11"	7'-6"	9'-2"	8'-6"	7'-2"
350S162-54	12	50	27'-4"	21'-8"	18'-11"	16'-11"	14'-9"	12'-6"	15'-4"	13'-5"	11'-4"	14'-3"	12'-6"	10'-6"	13'-5"	11'-9"	9'-11"	12'-9"	11'-2"	9'-5"	12'-2"	10'-8"	9'-0"
	16		24'-10"	19'-8"	17'-2"	15'-4"	13'-5"	11'-4"	14'-0"	12'-2"	10'-3"	13'-0"	11'-4"	9'-7"	12'-2"	10'-8"	9'-0"	11'-7"	10'-1"	8'-6"	11'-1"	9'-8"	8'-2"
	24		21'-8"	17'-2"	15'-0"	13'-5"	11'-9"	9'-11"	12'-2"	10'-8"	9'-0"	11'-4"	9'-11"	8'-4"	10'-8"	9'-4"	7'-10"	10'-1"	8'-10"	7'-6"	9'-8"	8'-6"	7'-2"
350S162-68	12	50	29'-4"	23'-4"	20'-4"	18'-2"	15'-11"	13'-5"	16'-6"	14'-5"	12'-2"	15'-4"	13'-5"	11'-4"	14'-5"	12'-7"	10'-8"	13'-9"	12'-0"	10'-1"	13'-1"	11'-6"	9'-8"
	16		26'-8"	21'-2"	18'-6"	16'-6"	14'-5"	12'-2"	15'-0"	13'-1"	11'-1"	13'-11"	12'-2"	10'-3"	13'-1"	11'-6"	9'-8"	12'-6"	10'-11"	9'-2"	11'-11"	10'-5"	8'-9"
	24		23'-4"	18'-6"	16'-2"	14'-5"	12'-7"	10'-8"	13'-1"	11'-6"	9'-8"	12'-2"	10'-8"	9'-0"	11'-6"	10'-0"	8'-5"	10'-11"	9'-6"	8'-0"	10'-5"	9'-1"	7'-8"
350S162-97	12	50	32'-4"	25'-8"	22'-5"	20'-1"	17'-6"	14'-9"	18'-3"	15'-11"	13'-5"	16'-11"	14'-9"	12'-6"	15'-11"	13'-11"	11'-9"	15'-2"	13'-3"	11'-2"	14'-6"	12'-8"	10'-8"
	16		29'-5"	23'-4"	20'-5"	18'-3"	15'-11"	13'-5"	16'-7"	14'-6"	12'-2"	15'-5"	13'-5"	11'-4"	14'-6"	12'-8"	10'-8"	13'-9"	12'-0"	10'-2"	13'-2"	11'-6"	9'-8"
	24		25'-8"	20'-5"	17'-10"	15'-11"	13'-11"	11'-9"	14'-6"	12'-8"	10'-8"	13'-5"	11'-9"	9'-11"	12'-8"	11'-0"	9'-4"	12'-0"	10'-6"	8'-10"	11'-6"	10'-0"	8'-6"
350S200-43	12	33	26'-11"	21'-4"	18'-8"	16'-8"	14'-7"	12'-4"	15'-2"	13'-3"	11'-2"	14'-1"	12'-4"	10'-4"	13'-3"	11'-7"	9'-9"	12'-6"	11'-0"	9'-3"	11'-9"	10'-6"	8'-10"
	16		24'-6"	19'-5"	17'-0"	15'-2"	13'-3"	11'-2"	13'-9"	12'-0"	10'-2"	12'-9"	11'-2"	9'-5"	11'-9"	10'-6"	8'-10"	10'-10"	10'-0"	8'-5"	10'-2"	9'-7"	8'-1"
	24		21'-4"	17'-0"	14'-10"	13'-3"	3																

Limiting Wall Heights - Curtain Wall 1-span

Stud Member	Spacing, in. oc	Fy, ksi	5 psf			15 psf			20 psf			25 psf			30 psf			35 psf			40 psf		
			L/120	L/240	L/360	L/240	L/360	L/600	L/240	L/360	L/600	L/240	L/360	L/600	L/240	L/360	L/600	L/240	L/360	L/600	L/240	L/360	L/600
362S162-54	12	33	28'-3"	22'-5"	19'-7"	17'-6"	15'-3"	12'-11"	15'-11"	13'-11"	11'-9"	14'-9"	12'-11"	10'-10"	13'-11"	12'-2"	10'-3"	13'-2"	11'-6"	9'-9"	12'-7"	11'-0"	9'-4"
	16		25'-8"	20'-4"	17'-9"	15'-11"	13'-11"	11'-9"	14'-5"	12'-7"	10'-8"	13'-5"	11'-9"	9'-11"	12'-7"	11'-0"	9'-4"	12'-0"	10'-6"	8'-10"	11'-4"	10'-0"	8'-5"
	24		22'-5"	17'-9"	15'-6"	13'-11"	12'-2"	10'-3"	12'-7"	11'-0"	9'-4"	11'-8"	10'-3"	8'-8"	10'-8"	9'-8"	8'-1"	9'-11"	9'-2"	7'-9"	9'-3"	8'-9"	7'-5"
362S162-54	12	50	28'-1"	22'-3"	19'-5"	17'-5"	15'-2"	12'-10"	15'-10"	13'-10"	11'-8"	14'-8"	12'-10"	10'-10"	13'-10"	12'-1"	10'-2"	13'-1"	11'-5"	9'-8"	12'-6"	10'-11"	9'-3"
	16		25'-6"	20'-3"	17'-8"	15'-10"	13'-10"	11'-8"	14'-4"	12'-6"	10'-7"	13'-4"	11'-8"	9'-10"	12'-6"	10'-11"	9'-3"	11'-11"	10'-5"	8'-9"	11'-5"	9'-11"	8'-5"
	24		22'-3"	17'-8"	15'-5"	13'-10"	12'-1"	10'-2"	12'-6"	10'-11"	9'-3"	11'-8"	10'-2"	8'-7"	10'-11"	9'-7"	8'-1"	10'-5"	9'-1"	7'-8"	9'-11"	8'-8"	7'-4"
362S162-68	12	50	30'-2"	24'-0"	20'-11"	18'-9"	16'-4"	13'-9"	17'-0"	14'-10"	12'-6"	15'-9"	13'-9"	11'-8"	14'-10"	13'-0"	10'-11"	14'-1"	12'-4"	10'-5"	13'-6"	11'-9"	9'-11"
	16		27'-5"	21'-9"	19'-0"	17'-0"	14'-10"	12'-6"	15'-5"	13'-6"	11'-5"	14'-4"	12'-6"	10'-7"	13'-6"	11'-9"	9'-11"	12'-10"	11'-2"	9'-5"	12'-3"	10'-9"	9'-0"
	24		24'-0"	19'-0"	16'-7"	14'-10"	13'-0"	10'-11"	13'-6"	11'-9"	9'-11"	12'-6"	10'-11"	9'-3"	11'-9"	10'-4"	8'-8"	11'-2"	9'-9"	8'-3"	10'-9"	9'-4"	7'-11"
362S162-97	12	50	33'-4"	26'-5"	23'-1"	20'-8"	18'-0"	15'-2"	18'-9"	16'-5"	13'-10"	17'-5"	15'-2"	12'-10"	16'-5"	14'-4"	12'-1"	15'-7"	13'-7"	11'-6"	14'-11"	13'-0"	11'-0"
	16		30'-3"	24'-0"	21'-0"	18'-9"	16'-5"	13'-10"	17'-0"	14'-11"	12'-7"	15'-10"	13'-10"	11'-8"	14'-11"	13'-0"	11'-0"	14'-2"	12'-4"	10'-5"	13'-6"	11'-10"	10'-0"
	24		26'-5"	21'-0"	18'-4"	16'-5"	14'-4"	12'-1"	14'-11"	13'-0"	11'-0"	13'-10"	12'-1"	10'-2"	13'-0"	11'-4"	9'-7"	12'-4"	10'-9"	9'-1"	11'-10"	10'-4"	8'-8"
362S200-33	12	33	24'-11"	19'-9"	17'-3"	15'-5"	13'-6"	11'-4"	14'-0"	12'-3"	10'-4"	12'-7"	11'-4"	9'-7"	11'-6"	10'-8"	9'-0"	10'-8"	10'-2"	8'-7"	10'-0"	9'-9"	8'-2"
	16		22'-7"	17'-11"	15'-8"	14'-0"	12'-3"	10'-4"	12'-2"	11'-1"	9'-5"	10'-11"	10'-4"	8'-8"	10'-0"	9'-9"	8'-2"	9'-3"	8'-3"	7'-9"	8'-8"	8'-8"	7'-5"
	24		19'-9"	15'-8"	13'-8"	11'-6"	10'-8"	9'-0"	10'-0"	9'-9"	8'-2"	8'-11"	8'-11"	7'-7"	8'-2"	8'-2"	7'-2"	7'-6"	7'-6"	6'-10"	7'-1"	7'-1"	6'-6"
362S200-43	12	33	27'-8"	21'-11"	19'-2"	17'-2"	15'-0"	12'-8"	15'-7"	13'-7"	11'-6"	14'-5"	12'-8"	10'-8"	13'-7"	11'-11"	10'-0"	12'-10"	11'-3"	9'-6"	12'-0"	10'-10"	9'-1"
	16		25'-2"	19'-11"	17'-5"	15'-7"	13'-7"	11'-6"	14'-2"	12'-4"	10'-5"	13'-2"	11'-6"	9'-8"	12'-0"	10'-10"	9'-1"	11'-1"	10'-3"	8'-8"	10'-5"	9'-10"	8'-3"
	24		21'-11"	17'-5"	15'-3"	13'-7"	11'-11"	10'-0"	12'-0"	10'-10"	9'-1"	10'-9"	10'-0"	8'-5"	9'-9"	9'-5"	7'-11"	9'-1"	9'-0"	7'-7"	8'-6"	8'-6"	7'-3"
362S200-54	12	33	29'-10"	23'-8"	20'-8"	18'-6"	16'-2"	13'-8"	16'-10"	14'-8"	12'-5"	15'-7"	13'-8"	11'-6"	14'-8"	12'-10"	10'-10"	13'-11"	12'-2"	10'-3"	13'-4"	11'-8"	9'-10"
	16		27'-1"	21'-6"	18'-10"	16'-10"	14'-8"	12'-5"	15'-3"	13'-4"	11'-3"	14'-2"	12'-5"	10'-5"	13'-4"	11'-8"	9'-10"	12'-8"	11'-1"	9'-4"	12'-1"	10'-7"	8'-11"
	24		23'-8"	18'-10"	16'-5"	14'-8"	12'-10"	10'-10"	13'-4"	11'-8"	9'-10"	12'-5"	10'-10"	9'-2"	11'-7"	10'-2"	8'-7"	10'-9"	9'-8"	8'-2"	10'-1"	9'-3"	7'-10"
362S200-54	12	50	29'-4"	23'-3"	20'-4"	18'-2"	15'-10"	13'-5"	16'-6"	14'-5"	12'-2"	15'-4"	13'-5"	11'-3"	14'-5"	12'-7"	10'-7"	13'-8"	12'-0"	10'-1"	13'-1"	11'-5"	9'-8"
	16		26'-7"	21'-2"	18'-5"	16'-6"	14'-5"	12'-2"	15'-0"	13'-1"	11'-1"	13'-11"	12'-2"	10'-3"	13'-1"	11'-5"	9'-8"	12'-5"	10'-10"	9'-2"	11'-11"	10'-5"	8'-9"
	24		23'-3"	18'-5"	16'-1"	14'-5"	12'-7"	10'-7"	13'-1"	11'-5"	9'-8"	12'-2"	10'-7"	8'-11"	11'-5"	10'-0"	8'-5"	10'-10"	9'-6"	8'-0"	10'-5"	9'-1"	7'-8"
362S200-68	12	50	31'-10"	25'-4"	22'-1"	19'-9"	17'-3"	14'-7"	17'-11"	15'-8"	13'-3"	16'-8"	14'-7"	12'-3"	15'-8"	13'-8"	11'-7"	14'-11"	13'-0"	11'-0"	14'-3"	12'-5"	10'-6"
	16		28'-11"	23'-0"	20'-1"	17'-11"	15'-8"	13'-3"	16'-4"	14'-3"	12'-0"	15'-2"	13'-3"	11'-2"	14'-3"	12'-5"	10'-6"	13'-6"	11'-10"	10'-0"	12'-11"	11'-4"	9'-6"
	24		25'-4"	20'-1"	17'-6"	15'-8"	13'-8"	11'-7"	14'-3"	12'-5"	10'-6"	13'-3"	11'-7"	9'-9"	12'-5"	10'-10"	9'-2"	11'-10"	10'-4"	8'-9"	11'-4"	9'-11"	8'-4"
362S200-97	12	50	35'-4"	28'-1"	24'-6"	21'-11"	19'-2"	16'-2"	19'-11"	17'-5"	14'-8"	18'-6"	16'-2"	13'-7"	17'-5"	15'-2"	12'-10"	16'-6"	14'-5"	12'-2"	15'-10"	13'-10"	11'-8"
	16		32'-1"	25'-6"	22'-3"	19'-11"	17'-5"	14'-8"	18'-1"	15'-10"	13'-4"	16'-9"	14'-8"	12'-4"	15'-10"	13'-10"	11'-8"	15'-0"	13'-1"	11'-1"	14'-4"	12'-6"	10'-7"
	24		28'-1"	22'-3"	19'-5"	17'-5"	15'-2"	12'-10"	15'-10"	13'-10"	11'-8"	14'-8"	12'-10"	10'-10"	13'-10"	12'-1"	10'-2"	13'-1"	11'-5"	9'-8"	12'-6"	10'-11"	9'-3"
362S250-43	12	33	28'-7"	22'-8"	19'-10"	17'-9"	15'-6"	13'-1"	16'-1"	14'-1"	11'-10"	14'-11"	13'-1"	11'-0"	14'-1"	12'-3"	10'-4"	13'-2"	11'-8"	9'-10"	12'-4"	11'-2"	9'-5"
	16		26'-0"	20'-7"	18'-0"	16'-1"	14'-1"	11'-10"	14'-8"	12'-9"	10'-9"	13'-6"	11'-10"	10'-0"	12'-4"	11'-2"	9'-5"	11'-5"	10'-7"	8'-11"	10'-8"	10'-2"	8'-7"
	24		22'-8"	18'-0"	15'-9"	14'-1"	12'-3"	10'-4"	12'-4"	11'-2"	9'-5"	11'-0"	10'-4"	8'-9"	10'-0"	9'-9"	8'-3"	9'-4"	9'-3"	7'-10"	8'-8"	8'-8"	7'-6"
362S250-54	12	33	30'-11"	24'-7"	21'-5"	19'-2"	16'-9"	14'-1"	17'-5"	15'-3"	12'-10"	16'-2"	14'-1"	11'-11"	15'-3"	13'-4"	11'-3"	14'-5"	12'-8"	10'-8"	13'-10"	12'-1"	10'-2"
	16		28'-1"	22'-4"	19'-6"	17'-5"	15'-3"	12'-10"	15'-10"	13'-10"	11'-8"	14'-8"	12'-10"	10'-10"	13'-10"	12'-1"	10'-2"	12'-11"	11'-6"	9'-8"	12'-1"	11'-0"	9'-3"
	24		24'-7"	19'-6"	17'-0"	15'-3"	13'-4"	11'-3"	13'-10"	12'-1"	10'-2"	12'-6"	11'-3"	9'-5"	11'-5"	10'-7"	8'-11"	10'-7"	10'-0"	8'-5"	9'-10"	9'-7"	8'-1"
362S250-54	12	50	30'-3"	24'-0"	21'-0"	18'-9"	16'-5"	13'-10"	17'-0"	14'-11"	12'-7"	15'-10"	13'-10"	11'-8"	14'-11"	13'-0"	11'-0"	14'-2"	12'-4"	10'-5"	13'-6"	11'-10"	10'-0"
	16		27'-6"	21'-10"	19'-1"	17'-0"	14'-11"	12'-7"	15'-6"	13'-6"	11'-5"	14'-4"	12'-7"	10'-7"	13'-6"	11'-10"	10'-0"	12'-10"	11'-3"	9'-6"	12'-3"	10'-9"	9'-1"
	24		24'-0"	19'-1"	16'-8"	14'-11"	13'-0"	11'-0"	13'-6"	11'-10"	10'-0"	12'-7"	11'-0"	9'-8"	11'-10"	10'-4"	8'-8"	11'-3"	9'-10"	8'-3"	10'-9"	9'-4"	7'-11"
362S250-68	12	50	32'-11"	26'-1"	22'-10"	20'-5"	17'-10"	15'-0"	18'-6"	16'-2"	13'-8"	17'-2"	15'-0"	12'-8"	16'-2"	14'-2"	11'-11"	15'-4"	13'-5"	11'-4"	14'-8"	12'-10"	10'-10"
	16		29'-11"	23'-9"	20'-9"	18'-6"	16'-2"	13'-8"	16'-10"	14'-8"	12'-5"	15'-8"	13'-8"	11'-6"	14'-8"	12'-10"	10'-10"	14'-0"	12'-2"	10'-4"	13'-4"	11'-8"	9'-10"
	24		26'-1"	20'-9"	18'-1"	16'-2"	14'-2"	11'-11"	14'-8"	12'-10"	10'-10"	13'-8"	11'-11"	10'-1"	12'-10"	11'-3"	9'-6"	12'-2"	10'-8"	9'-0"	11'-8"	10'-2"	8'-7"
362S250-97	12	50	37'-2"	29'-6"	25'-9"	23'-1"	20'-2"	17'-0"	20'-11"	18'-4"	15'-5"	19'-5"	17'-0"	14'-4"	18'-4"	16'-0"	13'-6"	17'-5"	15'-2"	12'-10"	16'-7"	14'-6"	12'-3"
	16		33'-9"	26'-10"	23'-5"	20'-11"	18'-4"	15'-5"	19'-0"	16'-7"	14'-0"	17'-8"	15'-5"	13'-0"	16'-7"	14'-6"	12'-3"	15'-9"	13'-10"	11'-8"	15'-1"	13'-2"	11'-2"
	24		29'-6"	23'-5"	20'-6"	18'-4"	16'-0"	13'-6"	16'-7"	14'-6"	12'-3"	15'-5"	13'-6"	11'-4"	14'-6"	12'-8"	10'-8"	13'-10"	12'-1"	10'-2"	13'-2"	11'-6"	9'-9"
362S300-33 ²	12	33	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	16		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	24		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
362S300-43 ²	12	33	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

Limiting Wall Heights - Curtain Wall 1-span

Stud Member	Spacing, in. oc	Fy, ksi	5 psf			15 psf			20 psf			25 psf			30 psf			35 psf			40 psf		
			L/120	L/240	L/360	L/240	L/360	L/600	L/240	L/360	L/600	L/240	L/360	L/600	L/240	L/360	L/600	L/240	L/360	L/600	L/240	L/360	L/600
400S162-54	12	33	30'-6"	24'-2"	21'-2"	18'-11"	16'-6"	13'-11"	17'-2"	15'-0"	12'-8"	15'-11"	13'-11"	11'-9"	15'-0"	13'-1"	11'-1"	14'-3"	12'-5"	10'-6"	13'-4"	11'-11"	10'-0"
	16		27'-8"	22'-0"	19'-2"	17'-2"	15'-0"	12'-8"	15'-7"	13'-7"	11'-6"	14'-6"	12'-8"	10'-8"	13'-4"	11'-11"	10'-0"	12'-4"	11'-4"	9'-6"	11'-6"	10'-10"	9'-1"
	24		24'-2"	19'-2"	16'-9"	15'-0"	13'-1"	11'-1"	13'-4"	11'-11"	10'-0"	11'-11"	11'-1"	9'-4"	10'-10"	10'-5"	8'-9"	10'-1"	9'-11"	8'-4"	9'-5"	9'-5"	8'-0"
400S162-54	12	50	30'-3"	24'-0"	21'-0"	18'-9"	16'-5"	13'-10"	17'-0"	14'-11"	12'-7"	15'-10"	13'-10"	11'-8"	14'-11"	13'-0"	11'-0"	14'-2"	12'-4"	10'-5"	13'-6"	11'-10"	10'-0"
	16		27'-6"	21'-10"	19'-1"	17'-0"	14'-11"	12'-7"	15'-6"	13'-6"	11'-5"	14'-4"	12'-7"	10'-7"	13'-6"	11'-10"	10'-0"	12'-10"	11'-3"	9'-6"	12'-3"	10'-9"	9'-1"
	24		24'-0"	19'-1"	16'-8"	14'-11"	13'-0"	11'-0"	13'-6"	11'-10"	10'-0"	12'-7"	11'-0"	9'-3"	11'-10"	10'-4"	8'-8"	11'-3"	9'-10"	8'-3"	10'-9"	9'-5"	7'-11"
400S162-68	12	50	32'-8"	25'-11"	22'-8"	20'-3"	17'-8"	14'-11"	18'-5"	16'-1"	13'-6"	17'-1"	14'-11"	12'-7"	16'-1"	14'-0"	11'-10"	15'-3"	13'-4"	11'-3"	14'-7"	12'-9"	10'-9"
	16		29'-8"	23'-6"	20'-7"	18'-5"	16'-1"	13'-6"	16'-8"	14'-7"	12'-4"	15'-6"	13'-6"	11'-5"	14'-7"	12'-9"	10'-9"	13'-10"	12'-1"	10'-3"	13'-3"	11'-7"	9'-9"
	24		25'-11"	20'-7"	18'-0"	16'-1"	14'-0"	11'-10"	14'-7"	12'-9"	10'-9"	13'-6"	11'-10"	10'-0"	12'-9"	11'-2"	9'-5"	12'-1"	10'-7"	8'-11"	11'-7"	10'-1"	8'-6"
400S162-97	12	50	36'-1"	28'-7"	25'-0"	22'-4"	19'-6"	16'-6"	20'-4"	17'-9"	14'-11"	18'-10"	16'-6"	13'-11"	17'-9"	15'-6"	13'-1"	16'-10"	14'-9"	12'-5"	16'-1"	14'-1"	11'-10"
	16		32'-9"	26'-0"	22'-8"	20'-4"	17'-9"	14'-11"	18'-5"	16'-1"	13'-7"	17'-1"	14'-11"	12'-7"	16'-1"	14'-1"	11'-10"	15'-4"	13'-4"	11'-3"	14'-8"	12'-9"	10'-9"
	24		28'-7"	22'-8"	19'-10"	17'-9"	15'-6"	13'-1"	16'-1"	14'-1"	11'-10"	14'-11"	13'-1"	11'-0"	14'-1"	12'-4"	10'-4"	13'-4"	11'-8"	9'-10"	12'-9"	11'-2"	9'-5"
400S200-33	12	33	26'-10"	21'-3"	18'-7"	16'-7"	14'-6"	12'-3"	14'-11"	13'-2"	11'-1"	13'-4"	12'-3"	10'-4"	12'-2"	11'-6"	9'-9"	11'-3"	10'-11"	9'-3"	10'-7"	10'-6"	8'-10"
	16		24'-4"	19'-4"	16'-11"	14'-11"	13'-2"	11'-1"	12'-11"	12'-0"	10'-1"	11'-7"	11'-1"	9'-5"	10'-7"	10'-6"	8'-10"	9'-9"	9'-9"	8'-5"	9'-2"	9'-2"	8'-0"
	24		21'-1"	16'-11"	14'-9"	12'-2"	11'-6"	9'-9"	10'-7"	10'-6"	8'-10"	9'-5"	9'-5"	8'-2"	8'-7"	8'-7"	7'-8"	8'-0"	8'-0"	7'-4"	7'-6"	7'-6"	7'-0"
400S200-43	12	33	29'-10"	23'-8"	20'-8"	18'-6"	16'-2"	13'-7"	16'-9"	14'-8"	12'-4"	15'-7"	13'-7"	11'-6"	14'-8"	12'-10"	10'-10"	13'-7"	12'-2"	10'-3"	12'-9"	11'-8"	9'-10"
	16		27'-1"	21'-6"	18'-9"	16'-9"	14'-8"	12'-4"	15'-3"	13'-4"	11'-3"	13'-11"	12'-4"	10'-5"	12'-9"	11'-8"	9'-10"	11'-9"	11'-1"	9'-4"	11'-0"	10'-7"	8'-11"
	24		23'-8"	18'-9"	16'-5"	14'-8"	12'-10"	10'-10"	12'-9"	11'-8"	9'-10"	11'-5"	10'-10"	9'-1"	10'-5"	10'-2"	8'-7"	9'-7"	9'-7"	8'-2"	9'-0"	9'-0"	7'-9"
400S200-54	12	33	32'-2"	25'-7"	22'-4"	20'-0"	17'-5"	14'-8"	18'-2"	15'-10"	13'-4"	16'-10"	14'-8"	12'-5"	15'-10"	13'-10"	11'-8"	15'-1"	13'-2"	11'-1"	14'-5"	12'-7"	10'-7"
	16		29'-3"	23'-3"	20'-3"	18'-2"	15'-10"	13'-4"	16'-6"	14'-5"	12'-2"	15'-4"	13'-4"	11'-3"	14'-5"	12'-7"	10'-7"	13'-5"	11'-11"	10'-1"	12'-6"	11'-5"	9'-8"
	24		25'-7"	20'-3"	17'-9"	15'-10"	13'-10"	11'-8"	14'-5"	12'-7"	10'-7"	12'-11"	11'-8"	9'-10"	11'-10"	11'-0"	9'-3"	10'-11"	10'-5"	8'-10"	10'-3"	10'-0"	8'-5"
400S200-54	12	50	31'-7"	25'-1"	21'-11"	19'-7"	17'-1"	14'-5"	17'-9"	15'-6"	13'-1"	16'-6"	14'-5"	12'-2"	15'-6"	13'-7"	11'-5"	14'-9"	12'-11"	10'-10"	14'-1"	12'-4"	10'-5"
	16		28'-8"	22'-9"	19'-11"	17'-9"	15'-6"	13'-1"	16'-2"	14'-1"	11'-11"	15'-0"	13'-1"	11'-1"	14'-1"	12'-4"	10'-5"	13'-5"	11'-9"	9'-11"	12'-10"	11'-2"	9'-5"
	24		25'-1"	19'-11"	17'-5"	15'-6"	13'-7"	11'-5"	14'-1"	12'-4"	10'-5"	13'-1"	11'-5"	9'-8"	12'-4"	10'-9"	9'-1"	11'-9"	10'-3"	8'-8"	11'-2"	9'-9"	8'-3"
400S200-68	12	50	34'-5"	27'-4"	23'-10"	21'-4"	18'-8"	15'-9"	19'-4"	16'-11"	14'-3"	18'-0"	15'-9"	13'-3"	16'-11"	14'-9"	12'-6"	16'-1"	14'-1"	11'-10"	15'-5"	13'-5"	11'-4"
	16		31'-3"	24'-10"	21'-8"	19'-4"	16'-11"	14'-3"	17'-7"	15'-5"	13'-0"	16'-4"	14'-3"	12'-0"	15'-5"	13'-5"	11'-4"	14'-7"	12'-9"	10'-9"	14'-0"	12'-2"	10'-4"
	24		27'-4"	21'-8"	18'-11"	16'-11"	14'-9"	12'-6"	15'-5"	13'-5"	11'-4"	14'-3"	12'-6"	10'-6"	13'-5"	11'-9"	9'-11"	12'-9"	11'-2"	9'-5"	12'-2"	10'-8"	9'-0"
400S200-97	12	50	38'-3"	30'-4"	26'-6"	23'-8"	20'-8"	17'-5"	21'-6"	18'-10"	15'-10"	20'-0"	17'-5"	14'-9"	18'-10"	16'-5"	13'-10"	17'-10"	15'-7"	13'-2"	17'-1"	14'-11"	12'-7"
	16		34'-9"	27'-7"	24'-1"	21'-6"	18'-10"	15'-10"	19'-7"	17'-1"	14'-5"	18'-2"	15'-10"	13'-4"	17'-1"	14'-11"	12'-7"	16'-3"	14'-2"	11'-11"	15'-6"	13'-7"	11'-5"
	24		30'-4"	24'-1"	21'-0"	18'-10"	16'-5"	13'-10"	17'-1"	14'-11"	12'-7"	15'-10"	13'-10"	11'-8"	14'-11"	13'-0"	11'-0"	14'-2"	12'-5"	10'-5"	13'-7"	11'-10"	10'-0"
400S250-33 ²	12	33	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	16		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	24		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
400S250-43	12	33	30'-9"	24'-5"	21'-4"	19'-1"	16'-8"	14'-1"	17'-4"	15'-2"	12'-9"	16'-1"	14'-1"	11'-10"	15'-1"	13'-3"	11'-2"	13'-11"	12'-7"	10'-7"	13'-0"	12'-0"	10'-2"
	16		28'-0"	22'-2"	19'-5"	17'-4"	15'-2"	12'-9"	15'-9"	13'-9"	11'-7"	14'-3"	12'-9"	10'-9"	13'-0"	12'-0"	10'-2"	12'-11"	11'-5"	9'-8"	11'-3"	10'-11"	9'-3"
	24		24'-5"	19'-5"	16'-11"	15'-1"	13'-3"	11'-2"	13'-0"	12'-0"	10'-2"	11'-8"	11'-2"	9'-5"	10'-8"	10'-6"	8'-10"	9'-10"	9'-10"	8'-5"	9'-3"	9'-3"	8'-1"
400S250-54	12	33	33'-4"	26'-5"	23'-1"	20'-8"	18'-0"	15'-3"	18'-9"	16'-5"	13'-10"	17'-5"	15'-3"	12'-10"	16'-5"	14'-4"	12'-1"	15'-7"	13'-7"	11'-6"	14'-10"	13'-0"	11'-0"
	16		30'-3"	24'-0"	21'-0"	18'-9"	16'-5"	13'-10"	17'-1"	14'-11"	12'-7"	15'-10"	13'-10"	11'-8"	14'-10"	13'-0"	11'-0"	13'-9"	12'-4"	10'-5"	12'-10"	11'-10"	10'-0"
	24		26'-5"	21'-0"	18'-4"	16'-5"	14'-4"	12'-1"	14'-10"	13'-0"	11'-0"	13'-3"	12'-1"	10'-2"	12'-1"	11'-4"	9'-7"	11'-3"	10'-10"	9'-1"	10'-6"	10'-4"	8'-8"
400S250-54	12	50	32'-7"	25'-10"	22'-7"	20'-2"	17'-8"	14'-10"	18'-4"	16'-0"	13'-6"	17'-0"	14'-10"	12'-6"	16'-0"	14'-0"	11'-10"	15'-3"	13'-3"	11'-3"	14'-7"	12'-9"	10'-9"
	16		29'-7"	23'-6"	20'-6"	18'-4"	16'-0"	13'-6"	16'-8"	14'-7"	12'-3"	15'-6"	13'-6"	11'-5"	14'-7"	12'-9"	10'-9"	13'-10"	12'-1"	10'-2"	13'-3"	11'-7"	9'-9"
	24		25'-10"	20'-6"	17'-11"	16'-0"	14'-0"	11'-10"	14'-7"	12'-9"	10'-9"	13'-6"	11'-10"	9'-11"	12'-9"	11'-1"	9'-4"	12'-1"	10'-7"	8'-11"	11'-7"	10'-1"	8'-6"
400S250-68	12	50	35'-6"	28'-2"	24'-7"	22'-0"	19'-2"	16'-2"	20'-0"	17'-5"	14'-9"	18'-6"	16'-2"	13'-8"	17'-5"	15'-3"	12'-10"	16'-7"	14'-6"	12'-3"	15'-10"	13'-10"	11'-8"
	16		32'-3"	25'-7"	22'-4"	20'-0"	17'-5"	14'-9"	18'-2"	15'-10"	13'-4"	16'-10"	14'-9"	12'-5"	15'-10"	13'-10"	11'-8"	15'-1"	13'-2"	11'-1"	14'-5"	12'-7"	10'-7"
	24		28'-2"	22'-4"	19'-6"	17'-5"	15'-3"	12'-10"	15'-10"	13'-10"	11'-8"	14'-9"	12'-10"	10'-10"	13'-10"	12'-1"	10'-2"	13'-2"	11'-6"	9'-8"	12'-7"	11'-0"	9'-3"
400S250-97	12	50	40'-1"	31'-10"	27'-10"	24'-10"	21'-9"	18'-4"	22'-7"	19'-9"	16'-8"	21'-0"	18'-4"	15'-5"	19'-9"	17'-3"	14'-7"	18'-9"	16'-5"	13'-10"	17'-11"	15'-8"	13'-3"
	16		36'-5"	28'-11"	25'-3"	22'-7"	19'-9"	16'-8"	20'-6"	17'-11"	15'-2"	19'-1"	16'-8"	14'-0"	17'-11"	15'-8"	13'-3"	17'-0"	14'-11"	12'-7"	16'-4"	14'-3"	12'-0"
	24		31'-10"	25'-3"	22'-1"	19'-9"	17'-3"	14'-7"	17'-11"	15'-8"	13'-3"	16'-8"	14'-7"	12'-3"	15'-8"	13'-8"	11'-7"	14'-11"	13'-0"	11'-0"	14'-3"	12'-5"	10'-6"
400S300-33 ²	12	33	-	-	-	-	-	-	-	-	-	-	-	-									

Limiting Wall Heights - Curtain Wall 1-span

Stud Member	Spacing, in. oc	Fy, ksi	5 psf			15 psf			20 psf			25 psf			30 psf			35 psf			40 psf		
			L/120	L/240	L/360	L/240	L/360	L/600	L/240	L/360	L/600	L/240	L/360	L/600	L/240	L/360	L/600	L/240	L/360	L/600	L/240	L/360	L/600
550S200-33	12	33	34'-8"	27'-6"	24'-0"	21'-6"	18'-9"	15'-10"	19'-1"	17'-0"	14'-4"	17'-1"	15'-10"	13'-4"	15'-7"	14'-11"	12'-7"	14'-5"	14'-2"	11'-11"	13'-6"	13'-6"	11'-5"
	16		31'-6"	25'-0"	21'-10"	19'-1"	17'-0"	14'-4"	16'-6"	15'-6"	13'-1"	14'-9"	14'-4"	12'-1"	13'-6"	13'-6"	11'-5"	12'-6"	12'-6"	10'-10"	11'-8"	11'-8"	10'-4"
	24		27'-0"	21'-10"	19'-1"	15'-7"	14'-11"	12'-7"	13'-6"	13'-6"	11'-5"	12'-1"	12'-1"	10'-7"	11'-0"	11'-0"	10'-0"	10'-2"	10'-2"	9'-6"	9'-6"	9'-1"	
550S200-43	12	33	38'-4"	30'-5"	26'-7"	23'-9"	20'-9"	17'-6"	21'-7"	18'-10"	15'-11"	20'-0"	17'-6"	14'-9"	18'-5"	16'-6"	13'-11"	17'-0"	15'-8"	13'-2"	15'-11"	15'-0"	12'-7"
	16		34'-10"	27'-8"	24'-2"	21'-7"	18'-10"	15'-11"	19'-6"	17'-1"	14'-5"	17'-6"	15'-11"	13'-5"	15'-11"	15'-0"	12'-7"	14'-9"	14'-3"	12'-0"	13'-10"	13'-7"	11'-6"
	24		30'-5"	24'-2"	21'-1"	18'-5"	16'-6"	13'-11"	15'-11"	15'-0"	12'-7"	14'-3"	13'-11"	11'-9"	13'-0"	13'-0"	11'-0"	12'-1"	12'-1"	10'-6"	11'-3"	11'-3"	10'-0"
550S200-54	12	33	41'-4"	32'-10"	28'-8"	25'-7"	22'-4"	18'-10"	23'-3"	20'-4"	17'-2"	21'-7"	18'-10"	15'-11"	20'-4"	17'-9"	15'-0"	19'-4"	16'-10"	14'-3"	18'-6"	16'-2"	13'-7"
	16		37'-7"	29'-10"	26'-0"	23'-3"	20'-4"	17'-2"	21'-2"	18'-6"	15'-7"	19'-8"	17'-2"	14'-6"	18'-6"	16'-2"	13'-7"	17'-5"	15'-4"	12'-11"	16'-4"	14'-8"	12'-4"
	24		32'-10"	26'-0"	22'-9"	20'-4"	17'-9"	15'-0"	18'-6"	16'-2"	13'-7"	16'-10"	15'-0"	12'-8"	15'-5"	14'-1"	11'-11"	14'-3"	13'-5"	11'-4"	13'-4"	12'-10"	10'-10"
550S200-54	12	50	40'-7"	32'-3"	28'-2"	25'-2"	22'-0"	18'-7"	22'-10"	20'-0"	16'-10"	21'-3"	18'-7"	15'-8"	20'-0"	17'-5"	14'-9"	19'-0"	16'-7"	14'-0"	18'-2"	15'-10"	13'-5"
	16		36'-11"	29'-3"	25'-7"	22'-10"	20'-0"	16'-10"	20'-9"	18'-2"	15'-4"	19'-3"	16'-10"	14'-3"	18'-2"	15'-10"	13'-5"	17'-3"	15'-1"	12'-8"	16'-6"	14'-5"	12'-2"
	24		32'-3"	25'-7"	22'-4"	20'-0"	17'-5"	14'-9"	18'-2"	15'-10"	13'-5"	16'-10"	14'-9"	12'-5"	15'-10"	13'-10"	11'-8"	15'-1"	13'-2"	11'-1"	14'-5"	12'-7"	10'-7"
550S200-68	12	50	44'-2"	35'-1"	30'-7"	27'-4"	23'-11"	20'-2"	24'-10"	21'-9"	18'-4"	23'-1"	20'-2"	17'-0"	21'-9"	19'-0"	16'-0"	20'-8"	18'-0"	15'-2"	19'-9"	17'-3"	14'-7"
	16		40'-1"	31'-10"	27'-10"	24'-10"	21'-9"	18'-4"	22'-7"	19'-9"	16'-8"	21'-0"	18'-4"	15'-5"	19'-9"	17'-3"	14'-7"	18'-9"	16'-5"	13'-10"	17'-11"	15'-8"	13'-3"
	24		35'-1"	27'-10"	24'-4"	21'-9"	19'-0"	16'-0"	19'-9"	17'-3"	14'-7"	18'-4"	16'-0"	13'-6"	17'-3"	15'-1"	12'-8"	16'-5"	14'-4"	12'-1"	15'-8"	13'-8"	11'-7"
550S200-97	12	50	49'-2"	39'-0"	34'-1"	30'-6"	26'-8"	22'-6"	27'-8"	24'-2"	20'-5"	25'-9"	22'-6"	18'-11"	24'-2"	21'-2"	17'-10"	23'-0"	20'-1"	16'-11"	22'-0"	19'-2"	16'-2"
	16		44'-8"	35'-6"	31'-0"	27'-8"	24'-2"	20'-5"	25'-2"	22'-0"	18'-6"	23'-4"	20'-5"	17'-3"	22'-0"	19'-2"	16'-2"	20'-11"	18'-3"	15'-5"	20'-0"	17'-5"	14'-9"
	24		39'-0"	31'-0"	27'-1"	24'-2"	21'-2"	17'-10"	22'-0"	19'-2"	16'-2"	20'-5"	17'-10"	15'-0"	19'-2"	16'-9"	14'-2"	18'-3"	15'-11"	13'-5"	17'-5"	15'-3"	12'-10"
600S137-33	12	33	33'-8"	26'-8"	23'-4"	19'-8"	18'-3"	15'-4"	17'-1"	16'-7"	13'-11"	15'-3"	15'-3"	12'-11"	13'-11"	13'-11"	12'-2"	12'-11"	12'-11"	11'-7"	12'-1"	12'-1"	11'-1"
	16		29'-6"	24'-3"	21'-2"	17'-1"	16'-7"	13'-11"	14'-9"	14'-9"	12'-8"	13'-3"	13'-3"	11'-9"	12'-1"	12'-1"	11'-1"	11'-2"	11'-2"	10'-6"	10'-5"	10'-5"	10'-1"
	24		24'-1"	21'-2"	18'-6"	13'-11"	13'-11"	12'-2"	12'-1"	12'-1"	11'-1"	10'-9"	10'-9"	10'-3"	9'-10"	9'-10"	9'-8"	9'-1"	9'-1"	9'-1"	8'-6"	8'-6"	8'-6"
600S137-43	12	33	37'-3"	29'-7"	25'-10"	23'-1"	20'-2"	17'-0"	20'-6"	18'-4"	15'-6"	18'-4"	17'-0"	14'-4"	16'-8"	16'-0"	13'-6"	15'-6"	15'-3"	12'-10"	14'-6"	14'-6"	12'-3"
	16		33'-10"	26'-11"	23'-6"	20'-6"	18'-4"	15'-6"	17'-9"	16'-8"	14'-1"	15'-10"	15'-6"	13'-1"	14'-6"	14'-6"	12'-3"	13'-5"	13'-5"	11'-8"	12'-6"	12'-6"	11'-2"
	24		28'-11"	23'-6"	20'-6"	16'-8"	16'-0"	13'-6"	14'-6"	14'-6"	12'-3"	12'-11"	12'-11"	11'-5"	11'-10"	11'-10"	10'-9"	10'-11"	10'-11"	10'-2"	10'-3"	10'-3"	9'-9"
600S137-54	12	33	40'-3"	32'-0"	27'-11"	25'-0"	21'-10"	18'-5"	22'-8"	19'-10"	16'-9"	20'-10"	18'-5"	15'-6"	19'-1"	17'-4"	14'-7"	17'-8"	16'-5"	13'-10"	16'-6"	15'-9"	13'-3"
	16		36'-7"	29'-1"	25'-4"	22'-8"	19'-10"	16'-9"	20'-2"	18'-0"	15'-2"	18'-1"	16'-9"	14'-1"	16'-6"	15'-9"	13'-3"	15'-3"	14'-11"	12'-7"	14'-3"	14'-3"	12'-1"
	24		32'-0"	25'-4"	22'-2"	19'-1"	17'-4"	14'-7"	16'-6"	15'-9"	13'-3"	14'-9"	14'-7"	12'-4"	13'-6"	13'-6"	11'-7"	12'-6"	12'-6"	11'-0"	11'-8"	11'-8"	10'-6"
600S137-54	12	50	39'-9"	31'-7"	27'-7"	24'-8"	21'-6"	18'-2"	22'-5"	19'-7"	16'-6"	20'-10"	18'-2"	15'-4"	19'-7"	17'-1"	14'-5"	18'-7"	16'-3"	13'-8"	17'-9"	15'-6"	13'-1"
	16		36'-2"	28'-8"	25'-1"	22'-5"	19'-7"	16'-6"	20'-4"	17'-9"	15'-0"	18'-11"	16'-6"	13'-11"	17'-9"	15'-6"	13'-1"	16'-11"	14'-9"	12'-5"	16'-2"	14'-1"	11'-11"
	24		31'-7"	25'-1"	21'-11"	19'-7"	17'-1"	14'-5"	17'-9"	15'-6"	13'-1"	16'-6"	14'-5"	12'-2"	15'-6"	13'-7"	11'-5"	14'-9"	12'-11"	10'-10"	13'-10"	12'-4"	10'-5"
600S137-68	12	50	43'-2"	34'-3"	29'-11"	26'-9"	23'-5"	19'-9"	24'-4"	21'-3"	17'-11"	22'-7"	19'-9"	16'-8"	21'-3"	18'-7"	15'-8"	20'-2"	17'-8"	14'-10"	19'-4"	16'-10"	14'-3"
	16		39'-3"	31'-2"	27'-3"	24'-4"	21'-3"	17'-11"	22'-1"	19'-4"	16'-3"	20'-6"	17'-11"	15'-1"	19'-4"	16'-10"	14'-3"	18'-4"	16'-0"	13'-6"	17'-6"	15'-4"	12'-11"
	24		34'-3"	27'-3"	23'-9"	21'-3"	18'-7"	15'-8"	19'-4"	16'-10"	14'-3"	17'-11"	15'-8"	13'-2"	16'-10"	14'-9"	12'-5"	16'-0"	14'-0"	11'-10"	15'-4"	13'-5"	11'-3"
600S137-97	12	50	47'-9"	37'-11"	33'-2"	29'-7"	25'-11"	21'-10"	26'-11"	23'-6"	19'-10"	25'-0"	21'-10"	18'-5"	23'-6"	20'-6"	17'-4"	22'-4"	19'-6"	16'-5"	21'-4"	18'-8"	15'-9"
	16		43'-5"	34'-6"	30'-1"	26'-11"	23'-6"	19'-10"	24'-5"	21'-4"	18'-0"	22'-8"	19'-10"	16'-9"	21'-4"	18'-8"	15'-9"	20'-3"	17'-9"	14'-11"	19'-5"	16'-11"	14'-4"
	24		37'-11"	30'-1"	26'-4"	23'-6"	20'-6"	17'-4"	21'-4"	18'-8"	15'-9"	19'-10"	17'-4"	14'-7"	18'-8"	16'-4"	13'-9"	17'-9"	15'-6"	13'-1"	16'-11"	14'-10"	12'-6"
600S162-33	12	33	35'-9"	28'-5"	24'-10"	22'-2"	19'-4"	16'-4"	19'-5"	17'-7"	14'-10"	17'-5"	16'-4"	13'-9"	15'-10"	15'-4"	13'-0"	14'-8"	14'-7"	12'-4"	13'-9"	13'-9"	11'-9"
	16		32'-6"	25'-10"	22'-6"	19'-5"	17'-7"	14'-10"	16'-10"	16'-0"	13'-6"	15'-4"	14'-10"	12'-9"	13'-9"	13'-9"	11'-9"	12'-9"	12'-9"	11'-2"	11'-11"	11'-11"	10'-8"
	24		27'-6"	22'-6"	19'-8"	15'-10"	15'-4"	13'-0"	13'-9"	13'-9"	11'-9"	12'-3"	12'-3"	10'-11"	11'-3"	11'-3"	10'-3"	10'-5"	10'-5"	9'-9"	9'-9"	9'-9"	9'-4"
600S162-43	12	33	39'-3"	31'-2"	27'-2"	24'-4"	21'-3"	17'-11"	22'-1"	19'-4"	16'-3"	20'-6"	17'-11"	15'-1"	19'-0"	16'-10"	14'-3"	17'-7"	16'-0"	13'-6"	16'-6"	15'-4"	12'-11"
	16		35'-8"	28'-4"	24'-9"	22'-1"	19'-4"	16'-3"	20'-1"	17'-6"	14'-9"	18'-1"	16'-3"	13'-9"	16'-6"	15'-4"	12'-11"	15'-3"	14'-7"	12'-3"	14'-3"	13'-11"	11'-9"
	24		31'-2"	24'-9"	21'-7"	19'-0"	16'-10"	14'-3"	16'-6"	15'-4"	12'-11"	14'-9"	14'-3"	12'-0"	13'-5"	13'-5"	11'-3"	12'-5"	12'-5"	10'-9"	11'-8"	11'-8"	10'-3"
600S162-54	12	33	42'-1"	33'-5"	29'-2"	26'-1"	22'-10"	19'-3"	23'-8"	20'-9"	17'-6"	22'-0"	19'-3"	16'-3"	20'-9"	18'-1"	15'-3"	19'-8"	17'-2"	14'-6"	18'-9"	16'-5"	13'-10"
	16		38'-3"	30'-4"	26'-6"	23'-8"	20'-9"	17'-6"	21'-6"	18'-10"	15'-10"	20'-0"	17'-6"	14'-9"	18'-9"	16'-5"	13'-10"	17'-4"	15'-7"	13'-2"	16'-3"	14'-11"	12'-7"
	24		33'-5"	26'-6"	23'-2"	20'-9"	18'-1"	15'-3"	18'-9"	16'-5"	13'-10"	16'-9"	15'-3"	12'-10"	15'-4"	14'-4"	12'-1"	14'-2"	13'-8"	11'-6"	13'-3"	13'-1"	11'-0"
600S162-54	12	50	41'-10"	33'-3"	29'-0"	25'-11"	22'-8"	19'-1"	23'-7"	20'-7"	17'-4"	21'-11"	19'-1"	16'-2"	20'-7"	18'-0"	15'-2"	19'-7"	17'-1"	14'-5"	18'-9"	16'-4"	13'-9"
	16		38'-1"	30'-2"	26'-5"	23'-7"	20'-7"	17'-4"	21'-5"	18'-9"	15'-9"	19'-11"	17'-4"	14'-8"	18'-9"	16'-4"	13'-9"	17'-9"	15'-6"	1			

Limiting Wall Heights - Curtain Wall 1-span

Stud Member	Spacing, in. oc	Fy, ksi	5 psf			15 psf			20 psf			25 psf			30 psf			35 psf			40 psf		
			L/120	L/240	L/360	L/240	L/360	L/600	L/240	L/360	L/600	L/240	L/360	L/600	L/240	L/360	L/600	L/240	L/360	L/600	L/240	L/360	L/600
600S250-54	12	50	44'-9"	35'-6"	31'-0"	27'-9"	24'-3"	20'-5"	25'-2"	22'-0"	18'-7"	23'-5"	20'-5"	17'-3"	22'-0"	19'-3"	16'-3"	20'-11"	18'-3"	15'-5"	20'-0"	17'-6"	14'-9"
	16		40'-8"	32'-3"	28'-2"	25'-2"	22'-0"	18'-7"	22'-11"	20'-0"	16'-10"	21'-3"	18'-7"	15'-8"	20'-0"	17'-6"	14'-9"	19'-0"	16'-7"	14'-0"	18'-2"	15'-10"	13'-5"
	24		35'-6"	28'-2"	24'-7"	22'-0"	19'-3"	16'-3"	20'-0"	17'-6"	14'-9"	18'-7"	16'-3"	13'-8"	17'-0"	15'-3"	12'-10"	16'-7"	14'-6"	12'-3"	15'-10"	13'-10"	11'-8"
600S250-68	12	50	48'-6"	38'-6"	33'-8"	30'-1"	26'-3"	22'-2"	27'-4"	23'-10"	20'-2"	25'-4"	22'-2"	18'-8"	23'-10"	20'-10"	17'-7"	22'-8"	19'-10"	16'-9"	21'-8"	18'-11"	16'-0"
	16		44'-1"	35'-0"	30'-7"	27'-4"	23'-10"	20'-2"	24'-10"	21'-8"	18'-4"	23'-1"	20'-2"	17'-0"	21'-8"	18'-11"	16'-0"	20'-7"	18'-0"	15'-2"	19'-8"	17'-3"	14'-6"
	24		38'-6"	30'-7"	26'-8"	23'-10"	20'-10"	17'-7"	21'-8"	18'-11"	16'-0"	20'-2"	17'-7"	14'-10"	18'-11"	16'-7"	14'-0"	18'-0"	15'-9"	13'-3"	17'-3"	15'-0"	12'-8"
600S250-97	12	50	54'-11"	43'-7"	38'-1"	34'-1"	29'-9"	25'-1"	30'-11"	27'-0"	22'-10"	28'-9"	25'-1"	21'-2"	27'-0"	23'-7"	19'-11"	25'-8"	22'-5"	18'-11"	24'-7"	21'-5"	18'-1"
	16		49'-11"	39'-7"	34'-7"	30'-11"	27'-0"	22'-10"	28'-1"	24'-7"	20'-9"	26'-1"	22'-10"	19'-3"	24'-7"	21'-5"	18'-1"	23'-4"	20'-5"	17'-2"	22'-4"	19'-6"	16'-5"
	24		43'-7"	34'-7"	30'-3"	27'-0"	23'-7"	19'-11"	24'-7"	21'-5"	18'-1"	22'-10"	19'-11"	16'-10"	21'-5"	18'-9"	15'-10"	20'-5"	17'-10"	15'-0"	19'-6"	17'-0"	14'-4"
600S250-118	12	50	58'-7"	46'-6"	40'-7"	36'-4"	31'-9"	26'-9"	33'-0"	28'-10"	24'-4"	30'-8"	26'-9"	22'-7"	28'-10"	25'-2"	21'-3"	27'-5"	23'-11"	20'-2"	26'-2"	22'-11"	19'-4"
	16		53'-3"	42'-3"	36'-11"	33'-0"	28'-10"	24'-4"	30'-0"	26'-2"	22'-1"	27'-10"	24'-4"	20'-6"	26'-2"	22'-11"	19'-4"	24'-10"	21'-9"	18'-4"	23'-9"	20'-9"	17'-6"
	24		46'-6"	36'-11"	32'-3"	28'-10"	25'-2"	21'-3"	26'-2"	22'-11"	19'-4"	24'-4"	21'-3"	17'-11"	22'-11"	20'-0"	16'-10"	21'-9"	19'-0"	16'-0"	20'-9"	18'-2"	15'-4"
600S300-54	12	33	46'-8"	37'-0"	32'-4"	28'-11"	25'-3"	21'-4"	26'-3"	22'-11"	19'-4"	24'-5"	21'-4"	18'-0"	22'-11"	20'-1"	16'-11"	21'-3"	19'-1"	16'-1"	19'-10"	18'-3"	15'-4"
	16		42'-5"	33'-8"	29'-5"	26'-3"	22'-11"	19'-4"	23'-10"	20'-10"	17'-7"	21'-9"	19'-4"	16'-4"	19'-10"	18'-3"	15'-4"	18'-5"	17'-4"	14'-7"	17'-2"	16'-7"	14'-0"
	24		37'-0"	29'-5"	25'-8"	22'-11"	20'-1"	16'-11"	19'-10"	18'-3"	15'-4"	17'-9"	16'-11"	14'-3"	16'-2"	15'-11"	13'-5"	15'-0"	15'-0"	12'-9"	14'-0"	14'-0"	12'-2"
600S300-54	12	50	45'-9"	36'-3"	31'-8"	28'-4"	24'-9"	20'-11"	25'-9"	22'-6"	19'-0"	23'-11"	20'-11"	17'-7"	22'-8"	19'-8"	16'-7"	21'-4"	18'-8"	15'-9"	20'-5"	17'-10"	15'-1"
	16		41'-7"	33'-0"	28'-10"	25'-9"	22'-6"	19'-0"	23'-5"	20'-5"	17'-3"	21'-9"	19'-0"	16'-0"	20'-5"	17'-10"	15'-1"	19'-5"	17'-0"	14'-4"	18'-7"	16'-3"	13'-8"
	24		36'-3"	28'-10"	25'-2"	22'-6"	19'-8"	16'-7"	20'-5"	17'-10"	15'-1"	19'-0"	16'-7"	14'-0"	17'-10"	15'-7"	13'-2"	17'-0"	15'-7"	12'-6"	16'-3"	14'-2"	11'-11"
600S300-68	12	50	49'-9"	39'-5"	34'-6"	30'-10"	26'-11"	22'-8"	28'-0"	24'-5"	20'-7"	26'-0"	22'-8"	19'-2"	24'-5"	21'-4"	18'-0"	23'-3"	20'-4"	17'-1"	22'-3"	19'-5"	16'-4"
	16		45'-2"	35'-10"	31'-4"	28'-0"	24'-5"	20'-7"	25'-5"	22'-3"	18'-9"	23'-7"	20'-7"	17'-5"	22'-3"	19'-5"	16'-4"	21'-1"	18'-5"	15'-7"	20'-2"	17'-8"	14'-10"
	24		39'-5"	31'-4"	27'-4"	24'-5"	21'-4"	18'-0"	22'-3"	19'-5"	16'-4"	20'-7"	18'-0"	15'-2"	19'-5"	16'-11"	14'-4"	18'-5"	16'-1"	13'-7"	17'-8"	15'-5"	13'-0"
600S300-97	12	50	56'-10"	45'-1"	39'-5"	35'-2"	30'-9"	25'-11"	32'-0"	27'-11"	23'-7"	29'-8"	25'-11"	21'-11"	27'-11"	24'-5"	20'-7"	26'-6"	23'-2"	19'-7"	25'-5"	22'-2"	18'-8"
	16		51'-7"	40'-11"	35'-9"	32'-0"	27'-11"	23'-7"	29'-1"	25'-5"	21'-5"	27'-0"	23'-7"	19'-10"	25'-5"	22'-2"	18'-8"	24'-1"	21'-1"	17'-9"	23'-1"	20'-2"	17'-0"
	24		45'-1"	35'-9"	31'-3"	27'-11"	24'-5"	20'-7"	25'-5"	22'-2"	18'-8"	23'-7"	20'-7"	17'-4"	22'-2"	19'-4"	16'-4"	21'-1"	18'-5"	15'-6"	20'-2"	17'-7"	14'-10"
600S300-118	12	50	60'-9"	48'-2"	42'-1"	37'-8"	32'-11"	27'-9"	34'-2"	29'-11"	25'-2"	31'-9"	27'-9"	23'-5"	29'-11"	26'-1"	22'-0"	28'-5"	24'-9"	20'-11"	27'-2"	23'-9"	20'-0"
	16		55'-2"	43'-10"	38'-3"	34'-2"	29'-11"	25'-2"	31'-1"	27'-2"	22'-11"	28'-10"	25'-2"	21'-3"	27'-2"	23'-9"	20'-0"	25'-9"	22'-6"	19'-0"	24'-8"	21'-7"	18'-2"
	24		48'-2"	38'-3"	33'-5"	29'-11"	26'-1"	22'-0"	27'-2"	23'-9"	20'-0"	25'-2"	22'-0"	18'-7"	23'-9"	20'-9"	17'-6"	22'-6"	19'-8"	16'-7"	21'-7"	18'-10"	15'-10"
600S350-54	12	50	48'-6"	38'-6"	33'-8"	30'-1"	26'-3"	22'-2"	27'-4"	23'-10"	20'-1"	25'-4"	22'-2"	18'-8"	23'-10"	20'-10"	17'-7"	22'-8"	19'-10"	16'-8"	21'-8"	18'-11"	16'-0"
	16		44'-1"	35'-0"	30'-7"	27'-4"	23'-10"	20'-1"	24'-10"	21'-8"	18'-3"	23'-0"	20'-1"	17'-0"	21'-8"	18'-11"	16'-0"	20'-7"	18'-0"	15'-2"	19'-8"	17'-2"	14'-6"
	24		38'-6"	30'-7"	26'-8"	23'-10"	20'-10"	17'-7"	21'-8"	18'-11"	16'-0"	20'-1"	17'-7"	14'-10"	18'-11"	16'-7"	13'-11"	18'-0"	15'-9"	13'-3"	17'-2"	15'-0"	12'-8"
600S350-68	12	50	52'-11"	42'-0"	36'-8"	32'-9"	28'-8"	24'-2"	29'-10"	26'-0"	21'-11"	27'-8"	24'-2"	20'-5"	26'-0"	22'-9"	19'-2"	24'-9"	21'-7"	18'-3"	23'-8"	20'-8"	17'-5"
	16		48'-1"	38'-2"	33'-4"	29'-10"	26'-0"	21'-11"	27'-1"	23'-8"	19'-11"	25'-2"	21'-11"	18'-6"	23'-8"	20'-8"	17'-5"	22'-6"	19'-7"	16'-7"	21'-6"	18'-9"	15'-10"
	24		42'-0"	33'-4"	29'-1"	26'-0"	22'-9"	19'-2"	23'-8"	20'-8"	17'-5"	21'-11"	19'-2"	16'-2"	20'-8"	18'-1"	15'-3"	19'-7"	17'-2"	14'-5"	18'-9"	16'-5"	13'-10"
600S350-97	12	50	59'-9"	47'-5"	41'-5"	37'-0"	32'-4"	27'-3"	33'-8"	29'-5"	24'-9"	31'-3"	27'-3"	23'-0"	29'-5"	25'-8"	21'-8"	27'-11"	24'-5"	20'-7"	26'-8"	23'-4"	19'-8"
	16		54'-3"	43'-1"	37'-8"	33'-8"	29'-5"	24'-9"	30'-7"	26'-8"	22'-6"	28'-4"	24'-9"	20'-11"	26'-8"	23'-4"	19'-8"	25'-4"	22'-2"	18'-8"	24'-3"	21'-2"	17'-10"
	24		47'-5"	37'-8"	32'-11"	29'-5"	25'-8"	21'-8"	26'-8"	23'-4"	19'-8"	24'-9"	21'-8"	18'-3"	23'-4"	20'-5"	17'-2"	22'-2"	19'-4"	16'-4"	21'-2"	18'-6"	15'-7"
600S350-118	12	50	64'-2"	50'-11"	44'-6"	39'-9"	34'-9"	29'-4"	36'-2"	31'-7"	26'-7"	33'-7"	29'-4"	24'-9"	31'-7"	27'-7"	23'-3"	30'-0"	26'-2"	22'-1"	28'-8"	25'-1"	21'-2"
	16		58'-4"	46'-3"	40'-5"	36'-2"	31'-7"	26'-7"	32'-10"	28'-8"	24'-2"	30'-6"	26'-7"	22'-5"	27'-3"	25'-1"	21'-2"	27'-3"	23'-10"	20'-1"	26'-5"	22'-9"	19'-2"
	24		50'-11"	40'-5"	35'-4"	31'-7"	27'-7"	23'-3"	28'-8"	25'-1"	21'-2"	26'-7"	23'-3"	19'-7"	25'-1"	21'-11"	18'-6"	23'-10"	20'-9"	17'-6"	22'-9"	19'-11"	16'-9"
800S137-33 ¹	12	33	36'-6"	33'-2"	28'-11"	21'-11"	21'-11"	19'-1"	18'-3"	18'-3"	17'-4"	16'-4"	16'-4"	16'-1"	14'-11"	14'-11"	14'-11"	13'-10"	13'-10"	13'-10"	12'-11"	12'-11"	12'-11"
	16		31'-8"	30'-1"	26'-4"	18'-3"	18'-3"	17'-4"	15'-10"	15'-10"	15'-9"	14'-2"	14'-2"	14'-2"	12'-11"	12'-11"	12'-11"	11'-11"	11'-11"	11'-11"	11'-2"	11'-2"	11'-2"
	24		25'-10"	25'-10"	23'-0"	14'-11"	14'-11"	14'-11"	12'-11"	12'-11"	12'-11"	11'-7"	11'-7"	11'-7"	10'-7"	10'-7"	10'-7"	9'-9"	9'-9"	9'-9"	9'-2"	9'-2"	9'-2"
800S137-43	12	33	46'-5"	36'-10"	32'-2"	27'-9"	25'-2"	21'-3"	24'-0"	22'-10"	19'-3"	21'-6"	21'-3"	17'-11"	19'-7"	18'-2"	16'-10"	18'-2"	18'-2"	16'-0"	17'-0"	17'-0"	15'-4"
	16		41'-7"	33'-6"	29'-3"	24'-0"	22'-10"	19'-3"	20'-10"	20'-9"	17'-6"	18'-7"	18'-7"	16'-3"	17'-0"	17'-0"	15'-4"	15'-9"	15'-9"	14'-6"	14'-9"	14'-9"	13'-11"
	24		34'-0"	29'-3"	25'-7"	19'-7"	19'-7"	16'-10"	17'-0"	17'-0"	15'-4"	15'-2"	15'-2"	14'-2"	13'-10"	13'-10"	13'-4"	12'-10"	12'-10"	12'-8"	12'-0"	12'-0"	12'-0"
800S137-54	12	33	50'-5"	40'-0"	34'-11"	31'-3"	27'-4"	23'-0"	27'-8"	24'-10"	20'-11"	24'-9"	23'-0"	19'-5"	22'-7"	21'-8"	18'-3"	20'-11"	20'-7"	17'-4"	19'-7"	19'-7"	16'-7"
	16		45'-10"	36'-4"	31'-9"	27'-8"	24'-10"	20'-11"	24'-0"	22'-6"	19'-0"	21'-5"	20'-11"	17'-8"									

Limiting Wall Heights - Curtain Wall 1-span

Stud Member	Spacing, in. oc	Fy, ksi	5 psf			15 psf			20 psf			25 psf			30 psf			35 psf			40 psf		
			L/120	L/240	L/360	L/240	L/360	L/600	L/240	L/360	L/600	L/240	L/360	L/600	L/240	L/360	L/600	L/240	L/360	L/600	L/240	L/360	L/600
800S200-54	12	33	55'-7"	44'-2"	38'-7"	34'-6"	30'-1"	25'-5"	31'-4"	27'-4"	23'-1"	29'-1"	25'-5"	21'-5"	27'-4"	23'-11"	20'-2"	26'-0"	22'-8"	19'-2"	24'-5"	21'-9"	18'-4"
	16		50'-6"	40'-1"	35'-0"	31'-4"	27'-4"	23'-1"	28'-5"	24'-10"	21'-0"	26'-5"	23'-1"	19'-6"	24'-5"	21'-9"	18'-4"	22'-7"	20'-7"	17'-5"	21'-1"	19'-9"	16'-8"
	24		44'-2"	35'-0"	30'-7"	27'-4"	23'-11"	20'-2"	24'-5"	21'-9"	18'-4"	21'-10"	20'-2"	17'-0"	19'-11"	19'-0"	16'-0"	18'-5"	18'-0"	15'-2"	17'-3"	17'-3"	14'-6"
800S200-54	12	50	54'-6"	43'-3"	37'-10"	33'-10"	29'-6"	24'-11"	30'-9"	26'-10"	22'-8"	28'-6"	24'-11"	21'-0"	26'-10"	23'-5"	19'-9"	25'-6"	22'-3"	18'-9"	24'-4"	21'-4"	18'-0"
	16		49'-7"	39'-4"	34'-4"	30'-9"	26'-10"	22'-8"	27'-11"	24'-4"	20'-7"	25'-11"	22'-8"	19'-1"	24'-4"	21'-4"	18'-0"	23'-2"	20'-3"	17'-1"	22'-2"	19'-4"	16'-4"
	24		43'-3"	34'-4"	30'-0"	26'-10"	23'-5"	19'-9"	24'-4"	21'-4"	18'-0"	22'-8"	19'-9"	16'-8"	21'-4"	18'-7"	15'-8"	20'-3"	17'-8"	14'-11"	19'-3"	16'-11"	14'-3"
800S200-68	12	50	59'-6"	47'-3"	41'-3"	36'-10"	32'-2"	27'-2"	33'-6"	29'-3"	24'-8"	31'-1"	27'-2"	22'-11"	29'-3"	25'-7"	21'-7"	27'-10"	24'-3"	20'-6"	26'-7"	23'-3"	19'-7"
	16		54'-0"	42'-11"	37'-6"	33'-6"	29'-3"	24'-8"	30'-5"	26'-7"	22'-5"	28'-3"	24'-8"	20'-10"	26'-7"	23'-3"	19'-7"	25'-3"	22'-1"	18'-7"	24'-2"	21'-1"	17'-10"
	24		47'-3"	37'-6"	32'-9"	29'-3"	25'-7"	21'-7"	26'-7"	23'-3"	19'-7"	24'-8"	21'-7"	18'-2"	23'-3"	20'-3"	17'-1"	22'-1"	19'-3"	16'-3"	21'-1"	18'-5"	15'-7"
800S200-97	12	50	66'-5"	52'-9"	46'-1"	41'-2"	36'-0"	30'-4"	37'-5"	32'-8"	27'-7"	34'-9"	30'-4"	25'-7"	32'-8"	28'-7"	24'-1"	31'-0"	27'-1"	22'-10"	29'-8"	25'-11"	21'-11"
	16		60'-4"	47'-11"	41'-10"	37'-5"	32'-8"	27'-7"	34'-0"	29'-8"	25'-0"	31'-7"	27'-7"	23'-3"	29'-8"	25'-11"	21'-11"	28'-2"	24'-8"	20'-9"	27'-0"	23'-7"	19'-11"
	24		52'-9"	41'-10"	36'-7"	32'-8"	28'-7"	24'-1"	29'-8"	25'-11"	21'-11"	27'-7"	24'-1"	20'-4"	25'-11"	22'-8"	19'-1"	24'-8"	21'-6"	18'-2"	23'-7"	20'-7"	17'-4"
800S200-118	12	50	70'-4"	55'-10"	48'-9"	43'-7"	38'-1"	32'-2"	39'-8"	34'-7"	29'-2"	36'-9"	32'-2"	27'-1"	34'-7"	30'-3"	25'-6"	32'-11"	28'-9"	24'-3"	31'-5"	27'-6"	23'-2"
	16		63'-11"	50'-9"	44'-4"	39'-8"	34'-7"	29'-2"	36'-0"	31'-5"	26'-6"	33'-5"	29'-2"	24'-7"	31'-5"	27'-6"	23'-2"	29'-11"	26'-1"	22'-0"	28'-7"	25'-0"	21'-1"
	24		55'-10"	44'-4"	38'-9"	34'-7"	30'-3"	25'-6"	31'-5"	27'-6"	23'-2"	29'-2"	25'-6"	21'-6"	27'-6"	24'-0"	20'-3"	26'-1"	22'-10"	19'-3"	25'-0"	21'-10"	18'-5"
800S250-43	12	33	52'-6"	41'-8"	36'-5"	32'-6"	28'-5"	24'-0"	29'-2"	25'-10"	21'-9"	26'-1"	24'-0"	20'-3"	23'-10"	22'-7"	19'-0"	22'-1"	21'-5"	18'-1"	20'-8"	20'-6"	17'-3"
	16		47'-8"	37'-10"	33'-1"	29'-2"	25'-10"	21'-9"	25'-3"	23'-5"	19'-9"	22'-7"	21'-9"	18'-4"	20'-8"	20'-6"	17'-3"	25'-11"	22'-8"	19'-2"	24'-10"	21'-8"	18'-4"
	24		41'-3"	33'-1"	28'-11"	23'-10"	22'-7"	19'-0"	20'-8"	20'-6"	17'-3"	18'-6"	18'-6"	16'-1"	16'-10"	16'-10"	15'-1"	15'-7"	15'-7"	14'-4"	14'-7"	14'-7"	13'-9"
800S250-54	12	33	57'-0"	45'-3"	39'-6"	35'-4"	30'-10"	26'-0"	32'-1"	28'-1"	23'-8"	29'-10"	26'-0"	21'-11"	27'-4"	24'-6"	20'-8"	25'-4"	23'-3"	19'-8"	23'-8"	22'-3"	18'-9"
	16		51'-9"	41'-1"	35'-11"	32'-1"	28'-1"	23'-8"	29'-0"	25'-6"	21'-6"	25'-11"	23'-8"	19'-11"	23'-8"	22'-3"	18'-9"	21'-11"	21'-2"	17'-10"	20'-6"	20'-3"	17'-1"
	24		45'-3"	35'-11"	31'-4"	27'-4"	24'-6"	20'-8"	23'-8"	22'-3"	18'-9"	21'-2"	20'-8"	17'-5"	19'-4"	19'-4"	16'-5"	17'-11"	17'-11"	15'-7"	16'-9"	16'-9"	14'-11"
800S250-54	12	50	55'-7"	44'-1"	38'-6"	34'-5"	30'-1"	25'-4"	31'-3"	27'-4"	23'-1"	29'-0"	25'-4"	21'-5"	27'-4"	23'-10"	20'-2"	25'-11"	22'-8"	19'-2"	24'-10"	21'-8"	18'-4"
	16		50'-6"	40'-1"	35'-0"	31'-3"	27'-4"	23'-1"	28'-5"	24'-10"	20'-11"	26'-5"	23'-1"	19'-5"	24'-10"	21'-8"	18'-4"	23'-7"	20'-7"	17'-5"	22'-7"	19'-8"	16'-7"
	24		44'-1"	35'-0"	30'-7"	27'-4"	23'-10"	20'-2"	24'-10"	21'-8"	18'-4"	23'-1"	20'-2"	17'-0"	21'-8"	18'-11"	16'-0"	20'-7"	18'-0"	15'-2"	19'-3"	17'-3"	14'-6"
800S250-68	12	50	60'-10"	48'-4"	42'-2"	37'-9"	32'-11"	27'-9"	34'-3"	29'-11"	25'-3"	31'-10"	27'-9"	23'-5"	29'-11"	26'-2"	22'-1"	28'-5"	24'-10"	20'-11"	27'-2"	23'-9"	20'-0"
	16		55'-3"	43'-11"	38'-4"	34'-3"	29'-11"	25'-3"	31'-2"	27'-2"	22'-11"	28'-11"	25'-3"	21'-4"	27'-2"	23'-9"	20'-0"	25'-10"	22'-7"	19'-0"	24'-9"	21'-7"	18'-2"
	24		48'-4"	38'-4"	33'-6"	29'-11"	26'-2"	22'-1"	27'-2"	23'-9"	20'-0"	25'-3"	22'-1"	18'-7"	23'-9"	20'-9"	17'-6"	22'-7"	19'-9"	16'-8"	21'-7"	18'-10"	15'-11"
800S250-97	12	50	68'-11"	54'-8"	47'-9"	42'-8"	37'-4"	31'-6"	38'-10"	33'-11"	28'-7"	36'-0"	31'-6"	26'-6"	33'-11"	29'-7"	25'-0"	32'-2"	28'-2"	23'-9"	30'-10"	26'-11"	22'-8"
	16		62'-7"	49'-8"	43'-5"	38'-10"	33'-11"	28'-7"	35'-3"	30'-10"	26'-0"	32'-9"	28'-7"	24'-1"	30'-10"	26'-11"	22'-8"	29'-3"	25'-7"	21'-7"	28'-0"	24'-5"	20'-7"
	24		54'-8"	43'-5"	37'-11"	33'-11"	29'-7"	25'-0"	30'-10"	26'-11"	22'-8"	28'-7"	25'-0"	21'-1"	26'-11"	23'-6"	19'-10"	25'-7"	22'-4"	18'-10"	24'-5"	21'-4"	18'-0"
800S250-118	12	50	73'-7"	58'-5"	51'-0"	45'-7"	39'-10"	33'-7"	41'-5"	36'-2"	30'-6"	38'-5"	33'-7"	28'-4"	36'-2"	31'-7"	26'-8"	34'-4"	30'-0"	25'-4"	32'-10"	28'-9"	24'-3"
	16		66'-10"	53'-0"	46'-4"	41'-5"	36'-2"	30'-6"	37'-8"	32'-10"	27'-9"	34'-11"	30'-6"	25'-9"	32'-10"	28'-9"	24'-3"	31'-3"	27'-3"	23'-0"	29'-10"	26'-1"	22'-0"
	24		58'-5"	46'-4"	40'-6"	36'-2"	31'-7"	26'-8"	32'-10"	28'-9"	24'-3"	30'-6"	26'-8"	22'-6"	28'-9"	25'-1"	21'-2"	27'-3"	23'-10"	20'-1"	26'-1"	22'-10"	19'-3"
800S300-54	12	50	56'-4"	44'-9"	39'-1"	34'-11"	30'-6"	25'-9"	31'-9"	27'-9"	23'-5"	29'-6"	25'-9"	21'-8"	27'-9"	24'-3"	20'-5"	26'-4"	23'-0"	19'-5"	25'-2"	22'-0"	18'-7"
	16		51'-2"	40'-8"	35'-6"	31'-9"	27'-9"	23'-5"	28'-10"	25'-2"	21'-3"	26'-9"	23'-5"	19'-9"	25'-2"	22'-0"	18'-7"	23'-11"	20'-11"	17'-8"	22'-11"	20'-0"	16'-10"
	24		44'-9"	35'-6"	31'-0"	27'-9"	24'-3"	20'-5"	25'-2"	22'-0"	18'-7"	23'-5"	20'-5"	17'-3"	22'-0"	19'-3"	16'-3"	20'-7"	18'-3"	15'-5"	19'-3"	17'-6"	14'-9"
800S300-68	12	50	62'-3"	49'-5"	43'-2"	38'-7"	33'-8"	28'-5"	35'-0"	30'-7"	25'-10"	32'-6"	28'-5"	24'-0"	30'-7"	26'-9"	22'-7"	29'-1"	25'-5"	21'-5"	27'-10"	24'-4"	20'-6"
	16		56'-6"	44'-10"	39'-2"	35'-0"	30'-7"	25'-10"	31'-10"	27'-10"	23'-5"	29'-7"	25'-10"	21'-9"	27'-10"	24'-4"	20'-6"	26'-5"	23'-1"	19'-6"	25'-3"	22'-1"	18'-7"
	24		49'-5"	39'-2"	34'-3"	30'-7"	26'-9"	22'-7"	27'-10"	24'-4"	20'-6"	25'-10"	22'-7"	19'-0"	24'-4"	21'-3"	17'-11"	23'-1"	20'-2"	17'-0"	22'-1"	19'-3"	16'-3"
800S300-97	12	50	71'-0"	56'-4"	49'-3"	44'-0"	38'-5"	32'-5"	40'-0"	34'-11"	29'-6"	37'-1"	32'-5"	27'-4"	34'-11"	30'-6"	25'-9"	33'-2"	29'-0"	24'-5"	31'-9"	27'-9"	23'-5"
	16		64'-6"	51'-2"	44'-9"	40'-0"	34'-11"	29'-6"	36'-4"	31'-9"	26'-9"	33'-9"	29'-6"	24'-10"	31'-9"	27'-9"	23'-5"	30'-2"	26'-4"	22'-3"	28'-10"	25'-2"	21'-3"
	24		56'-4"	44'-9"	39'-1"	34'-11"	30'-6"	25'-9"	31'-9"	27'-9"	23'-5"	29'-6"	25'-9"	21'-8"	27'-9"	24'-3"	20'-5"	26'-4"	23'-0"	19'-5"	25'-2"	22'-0"	18'-7"
800S300-118	12	50	76'-0"	60'-4"	52'-8"	47'-1"	41'-2"	34'-8"	42'-9"	37'-4"	31'-6"	39'-9"	34'-8"	29'-3"	37'-4"	32'-8"	27'-6"	35'-6"	31'-0"	26'-2"	33'-11"	29'-8"	25'-0"
	16		69'-0"	54'-9"	47'-10"	42'-9"	37'-4"	31'-6"	38'-10"	33'-11"	28'-8"	36'-1"	31'-6"	26'-7"	33'-11"	29'-8"	25'-0"	32'-3"	28'-2"	23'-9"	30'-10"	26'-11"	22'-9"
	24		60'-4"	47'-10"	41'-10"	37'-4"	32'-8"	27'-6"	33'-11"	29'-8"	25'-0"	31'-6"	27'-6"	23'-3"	29'-8"	25'-11"	21'-10"	28'-2"	24'-7"	20'-9"	26'-11"	23'-7"	19'-10"
800S350-54	12	33	61'-7"	48'-11"	42'-9"	38'-2"	33'-4"	28'-2"	34'-8"	30'-4"	25'-7"	32'-2"	28'-2"	23'-9"	30'-4"	26'-6"	22'-4"	28'-2"	25'-2"	21'-3"	26'-4"	24'-1"	20'-3"
	16		56'-0"	44'-5"	38'-10"	34'-8"	30'-4"	25'-7"	31'-6"	27'-6"	23'-3"	28'-11"	25'-7"	21'-7"	26'-4"	24'-1"	20'-3"	24'-5"	22'-10"	19'-3"	22'-10"	21'-10"	18'-5"
	24		48'-11"	38'-10"	33'-11"	30'-4"	26'-6"	22'-4"	26'-4"	24'-1"	20'-3"	23'-7"	22'-4"	18'-10"	21'-6"	21'-0"	17'-9"	19'-11"	19'-11"	16'-10"	18'-8"	18'-8"	16'-1"
800S350-54	12	50	59'-11"	47'-7"	41'-7"	37'-2"	32'-5"	27'-4"	33'-9"	29'-6"	24'-10"	31'-4"	27'-4"	23'-1"	29'-6"	25'-9"	21'-9"	28'-0"	24'-6"	20'-8"	26'-9"	23'-5"	19'-9"
	16		54'-5"	43'-3"	37'-9"	33'-9"	29'-6"	24'-10"	30'-8"	26'-9"	22'-7"	28'-6"	24'-10"	21'-0"	26'-9"	23'-5"	19'-9"	25'-5"	22'-3"	18'-9"	24'-4"	21'-3"	17'-11"
	24																						

Combined Axial and Lateral Load Table Notes

1. Allowable axial loads listed in kips (1 kip = 1000 pounds).
2. Allowable axial loads determined in accordance with AISI S240-15, assuming that all axial loads pass through the geometric center of the section
3. Listed lateral pressures and axial loads have not been modified for 1/3 stress increase based on wind/earthquake or multiple transient loads.
4. Allowable axial loads based on lateral and torsional bracing at a maximum spacing of 4 feet on center.
5. The 5 psf live load has not been reduced for deflection checks. For 15 psf or higher wind pressure, read the note below.
IBC 2018/ASCE 7-16: Due to the change in the model building codes, design wind pressures determined using IBC 2012/ASCE 7-10 are strength level loads (LRFD) in comparison to those determined in earlier IBC codes which were service level loads (ASD). The load/span tables that follow are based on service level (ASD) wind loads. Therefore, to properly use the load/span tables in this catalog, multiply the IBC 2012/ASCE 7-16 design wind pressures by 0.6 (Reference section 2.4 ASCE 7-16) prior to entering the load/span tables.

- Example:
* ASCE 7-10 Calculated Design Wind Pressure = 25 psf (Strength level loads, LRFD)
* Convert to service level loads (ASD) = 25 psf x 0.6 = 15 psf
* Use 15 psf as the Pressure Value used in this Table to determine the member span
Any Other Building Code: The load/span tables that follow are based on service level (ASD) wind loads. If the wind load being used meets this criterion, it does not need to be modified prior to using the tables.
6. Studs are assumed to be adequately braced at a maximum spacing of L_u to develop full allowable moment, M_a .
7. End supports have not been checked for web crippling. Refer web crippling capacity tables.
8. All tables are based on simple (single) span.
9. Cells marked with an " * " have $h/t > 200$, thus require bearing stiffeners. Cells are left blank when $h/t > 260$.
10. Cells marked with an a, b, c, d, e or f meets $L/720$, $L/600$, $L/480$, $L/360$, $L/240$, or $L/120$ respectively. Blank cells do not meet $L/120$.
11. Stud distortional buckling moment based on assumed $K\phi = 0$
12. Moment of inertia for deflection is optimized based on the maximum moment at service loads for the listed spans; therefore span values may be greater than spans based on effective moment of inertia listed in section property tables

Combined Axial and Lateral Load Tables

Combined Axial and Lateral Load Table Notes

See Page 41 for Detailed Combined Axial and Lateral Load Table Notes

5 psf Lateral Load (Interior Walls Only)

Wall Height (ft)	Spacing (in.) o.c.	362S137-(mils)				362S162-(mils)					362S200-(mils)					362S250-(mils)			
		33 ksi		50 ksi		33 ksi		50 ksi			33 ksi		50 ksi			33 ksi	50 ksi		
		33	43	54	68	33	43	54	68	97	33	43	54	68	97	43	54	68	97
8	12	1.46 a	2.08 a	3.11 a	4.05 a	1.86 a	2.52 a	3.98 a	5.11 a	7.48 a	2.26 a	3.26 a	5.05 a	7.99 a	9.2 a	3.72 a	5.74 a	7.52 a	10.57 a
	16	1.4 a	2.02 a	3.07 a	4.01 a	1.8 a	2.46 a	3.93 a	5.07 a	7.43 a	2.2 a	3.2 a	5 a	7.92 a	9.15 a	3.65 a	5.68 a	7.46 a	10.51 a
	24	1.29 a	1.91 a	2.98 a	3.93 a	1.68 a	2.35 a	3.84 a	4.98 a	7.35 a	2.06 a	3.07 a	4.88 a	7.79 a	9.06 a	3.51 a	5.55 a	7.34 a	10.41 a
9	12	1.38 a	1.98 a	2.93 a	3.82 a	1.75 a	2.38 a	3.74 a	4.78 a	6.97 a	2.14 a	3.09 a	4.72 a	7.48 a	8.54 a	3.56 a	5.44 a	7 a	9.83 a
	16	1.31 a	1.91 a	2.88 a	3.78 a	1.68 a	2.31 a	3.68 a	4.73 a	6.92 a	2.06 a	3.01 a	4.65 a	7.4 a	8.49 a	3.47 a	5.36 a	6.93 a	9.77 a
	24	1.17 a	1.78 a	2.77 a	3.68 a	1.53 a	2.17 a	3.56 a	4.63 a	6.81 a	1.9 a	2.85 a	4.52 a	7.24 a	8.38 a	3.3 a	5.22 a	6.79 a	9.64 a
10	12	1.28 a	1.87 a	2.72 a	3.55 a	1.63 a	2.09 a	3.47 a	4.42 a	6.41 a	2.01 a	2.9 a	4.35 a	6.88 a	7.83 a	3.38 a	5.1 a	6.43 a	9.05 a
	16	1.2 a	1.79 a	2.66 a	3.5 a	1.54 a	2.02 a	3.4 a	4.36 a	6.35 a	1.91 a	2.81 a	4.27 a	6.79 a	7.77 a	3.28 a	5.01 a	6.35 a	8.97 a
	24	1.04 a	1.62 a	2.54 a	3.39 a	1.37 a	1.86 a	3.26 a	4.24 a	6.23 a	1.72 a	2.62 a	4.12 a	6.61 a	7.64 a	3.08 a	4.84 a	6.2 a	8.83 a
12	12	1.08 a	1.6 a	2.29 a	2.98 a	1.37 a	1.99 a	2.84 a	3.62 a	5.2 a	1.71 a	2.48 a	3.54 a	5.58 a	6.33 a	2.91 a	4.17 a	5.25 a	7.39 a
	16	0.97 b	1.5 a	2.21 a	2.91 a	1.25 a	1.88 a	2.76 a	3.55 a	5.13 a	1.59 a	2.36 a	3.45 a	5.48 a	6.26 a	2.78 a	4.07 a	5.16 a	7.3 a
	24	0.76 d	1.28 c	2.05 b	2.78 a	1.03 c	1.66 b	2.59 a	3.41 a	4.99 a	1.33 c	2.13 a	3.27 a	5.27 a	6.11 a	2.52 a	3.86 a	4.97 a	7.13 a
14	12	0.85 c	1.31 b	1.86 a	2.43 a	1.09 b	1.63 a	2.28 a	2.93 a	4.17 a	1.38 a	2.05 a	2.82 a	4.45 a	5.08 a	2.42 a	3.33 a	4.22 a	5.95 a
	16	0.72 d	1.18 c	1.77 b	2.36 a	0.95 d	1.5 b	2.19 a	2.85 a	4.09 a	1.23 c	1.91 b	2.72 a	4.33 a	4.99 a	2.26 a	3.22 a	4.11 a	5.86 a
	24	0.47 e	0.93 e	1.59 d	2.21 c	0.69 e	1.23 d	2 c	2.68 b	3.93 a	0.93 d	1.63 d	2.52 c	4.1 a	4.83 a	1.95 c	2.99 b	3.9 a	5.66 a
16	12	0.63 d	1.01 d	1.49 c	1.96 b	0.82 d	1.28 c	1.82 b	2.35 a	3.35 a	1.05 c	1.62 b	2.25 a	3.56 a	4.09 a	1.93 a	2.66 a	3.4 a	4.82 a
	16	0.49 e	0.87 e	1.39 d	1.88 c	0.67 e	1.13 d	1.72 c	2.27 b	3.26 a	0.88 d	1.47 c	2.14 c	3.43 a	4 a	1.76 c	2.54 b	3.28 a	4.72 a
	24	0.2 f	0.59 f	1.2 e	1.72 e	0.37 f	0.84 e	1.52 e	2.09 d	3.1 c	0.55 e	1.16 e	1.92 d	3.18 c	3.83 b	1.41 d	2.29 d	3.06 c	4.51 a

5 psf Lateral Load (Interior Walls Only)

Wall Height (ft)	Spacing (in.) o.c.	362S300-(mils)			600S137-(mils)						600S162-(mils)						600S200-(mils)	
		50 ksi			33 ksi		50 ksi				33 ksi		50 ksi				33 ksi	
		54	68	97	33	43	54	68	97		33	43	54	68	97	118	33	43
8	12	5.79 a	8.01 a	11.82 a	1.77 a	2.51 a	3.8 a	5.03 a	7.52 a		2.44 a	3.4 a	5.59 a	7.42 a	11.35 a	14.19 a	2.86 a	4.29 a
	16	5.73 a	7.95 a	11.76 a	1.74 a	2.47 a	3.77 a	5 a	7.5 a		2.4 a	3.37 a	5.56 a	7.39 a	11.32 a	14.16 a	2.82 a	4.25 a
	24	5.61 a	7.83 a	11.65 a	1.67 a	2.41 a	3.71 a	4.95 a	7.45 a		2.33 a	3.3 a	5.49 a	7.33 a	11.25 a	14.09 a	2.74 a	4.17 a
9	12	5.49 a	7.51 a	11.15 a	1.75 a	2.48 a	3.77 a	5 a	7.5 a		2.4 a	3.37 a	5.57 a	7.4 a	11.32 a	14.17 a	2.81 a	4.22 a
	16	5.42 a	7.44 a	11.09 a	1.7 a	2.44 a	3.74 a	4.97 a	7.47 a		2.35 a	3.33 a	5.52 a	7.36 a	11.28 a	14.13 a	2.76 a	4.17 a
	24	5.28 a	7.29 a	10.96 a	1.61 a	2.36 a	3.67 a	4.9 a	7.41 a		2.26 a	3.24 a	5.44 a	7.28 a	11.2 a	14.04 a	2.66 a	4.06 a
10	12	5.17 a	6.99 a	10.28 a	1.71 a	2.45 a	3.75 a	4.98 a	7.48 a		2.35 a	3.32 a	5.52 a	7.37 a	11.29 a	14.14 a	2.75 a	4.14 a
	16	5.09 a	6.9 a	10.21 a	1.66 a	2.4 a	3.71 a	4.94 a	7.44 a		2.29 a	3.27 a	5.47 a	7.32 a	11.24 a	14.09 a	2.69 a	4.07 a
	24	4.92 a	6.74 a	10.06 a	1.55 a	2.3 a	3.62 a	4.86 a	7.37 a		2.18 a	3.16 a	5.37 a	7.22 a	11.14 a	13.98 a	2.57 a	3.95 a
12	12	4.55 a	5.93 a	8.45 a	1.64 a	2.38 a	3.69 a	4.93 a	7.43 a		2.23 a	3.18 a	5.29 a	7.16 a	11.23 a	14.07 a	2.61 a	3.94 a
	16	4.44 a	5.83 a	8.36 a	1.57 a	2.31 a	3.63 a	4.87 a	7.38 a		2.15 a	3.11 a	5.22 a	7.09 a	11.15 a	13.99 a	2.53 a	3.85 a
	24	4.22 a	5.62 a	8.18 a	1.41 a	2.16 a	3.51 a	4.75 a	7.27 a		1.99 a	2.96 a	5.07 a	6.96 a	11.01 a	13.84 a	2.36 a	3.67 a
14	12	3.8 a	4.85 a	6.85 a	1.56 a	2.3 a	3.63 a	4.86 a	7.37 a		2.07 a	3 a	4.96 a	6.75 a	10.8 a	13.99 a	2.44 a	3.68 a
	16	3.68 a	4.73 a	6.75 a	1.45 a	2.2 a	3.55 a	4.78 a	7.3 a		1.97 a	2.9 a	4.87 a	6.66 a	10.7 a	13.89 a	2.32 a	3.57 a
	24	3.42 a	4.5 a	6.54 a	1.24 a	2 a	3.38 a	4.62 a	7.15 a		1.76 a	2.71 a	4.68 a	6.49 a	10.51 a	13.68 a	2.1 a	3.34 a
16	12	3.07 a	3.92 a	5.58 a	1.45 a	2.2 a	3.55 a	4.79 a	7.3 a		1.89 a	2.78 a	4.54 a	6.22 a	9.94 a	12.85 a	2.23 a	3.38 a
	16	2.93 a	3.79 a	5.47 a	1.31 a	2.07 a	3.44 a	4.68 a	7.21 a		1.76 a	2.66 a	4.43 a	6.11 a	9.82 a	12.72 a	2.09 a	3.24 a
	24	2.66 c	3.54 b	5.25 a	1.04 b	1.81 a	3.23 a	4.47 a	7.02 a		1.5 b	2.41 a	4.21 a	5.89 a	9.59 a	12.48 a	1.81 a	2.96 a

Combined Axial and Lateral Load Tables

5 psf Lateral Load (Interior Walls Only)

Wall Height (ft)	Spacing (in.) o.c.	600S200-(mils)				600S250-(mils)					600S300-(mils)					600S350-(mils)				
		50 ksi				33 ksi	50 ksi				50 ksi				50 ksi					
		54	68	97	118	43	54	68	97	118	54	68	97	118	54	68	97	118		
8	12	7.35 a	9.77 a	15.24 a	19.54 a	4.65 a	7.59 a	10.93 a	17.91 a	22.79 a	7.9 a	11.11 a	19.22 a	24.9 a	10.21 a	14.72 a	23.85 a	31.42 a		
	16	7.31 a	9.73 a	15.2 a	19.5 a	4.61 a	7.55 a	10.88 a	17.86 a	22.75 a	7.86 a	11.07 a	19.17 a	24.85 a	10.17 a	14.68 a	23.8 a	31.36 a		
	24	7.23 a	9.65 a	15.12 a	19.42 a	4.52 a	7.48 a	10.8 a	17.77 a	22.65 a	7.78 a	10.98 a	19.08 a	24.76 a	10.09 a	14.59 a	23.7 a	31.26 a		
9	12	7.22 a	9.62 a	15.01 a	19.25 a	4.58 a	7.47 a	10.74 a	17.58 a	22.38 a	7.78 a	10.93 a	18.86 a	24.47 a	10.03 a	14.47 a	23.44 a	30.71 a		
	16	7.18 a	9.57 a	14.96 a	19.2 a	4.53 a	7.42 a	10.69 a	17.52 a	22.32 a	7.73 a	10.88 a	18.81 a	24.41 a	9.98 a	14.42 a	23.38 a	30.64 a		
	24	7.08 a	9.47 a	14.87 a	19.1 a	4.42 a	7.33 a	10.58 a	17.41 a	22.21 a	7.63 a	10.77 a	18.69 a	24.29 a	9.87 a	14.31 a	23.25 a	30.52 a		
10	12	7.07 a	9.43 a	14.73 a	18.9 a	4.5 a	7.33 a	10.53 a	17.2 a	21.89 a	7.63 a	10.72 a	18.45 a	23.97 a	9.82 a	14.19 a	22.97 a	29.9 a		
	16	7.01 a	9.37 a	14.67 a	18.83 a	4.44 a	7.27 a	10.46 a	17.13 a	21.82 a	7.57 a	10.66 a	18.38 a	23.89 a	9.75 a	14.12 a	22.9 a	29.82 a		
	24	6.89 a	9.25 a	14.56 a	18.71 a	4.31 a	7.15 a	10.33 a	16.99 a	21.68 a	7.45 a	10.53 a	18.24 a	23.75 a	9.63 a	13.98 a	22.75 a	29.67 a		
12	12	6.69 a	8.94 a	14 a	17.95 a	4.31 a	6.98 a	10.01 a	16.23 a	20.67 a	7.27 a	10.27 a	17.45 a	22.79 a	9.32 a	13.52 a	21.92 a	28.01 a		
	16	6.6 a	8.86 a	13.92 a	17.87 a	4.22 a	6.9 a	9.92 a	16.14 a	20.57 a	7.19 a	10.19 a	17.36 a	22.69 a	9.24 a	13.42 a	21.82 a	27.9 a		
	24	6.44 a	8.69 a	13.76 a	17.7 a	4.03 a	6.74 a	9.74 a	15.94 a	20.37 a	7.02 a	10.01 a	17.17 a	22.49 a	9.06 a	13.23 a	21.61 a	27.7 a		
14	12	6.19 a	8.3 a	13.04 a	16.69 a	4.08 a	6.6 a	9.38 a	15.04 a	19.14 a	6.84 a	9.74 a	16.28 a	21.48 a	8.75 a	12.73 a	20.52 a	25.83 a		
	16	6.08 a	8.19 a	12.94 a	16.59 a	3.95 a	6.49 a	9.27 a	14.92 a	19.01 a	6.73 a	9.63 a	16.16 a	21.35 a	8.63 a	12.6 a	20.38 a	25.7 a		
	24	5.87 a	7.98 a	12.73 a	16.37 a	3.71 a	6.28 a	9.03 a	14.67 a	18.76 a	6.51 a	9.39 a	15.92 a	21.09 a	8.41 a	12.36 a	20.12 a	25.44 a		
16	12	5.6 a	7.55 a	11.89 a	15.19 a	3.8 a	6.21 a	8.7 a	13.68 a	17.4 a	6.34 a	9.14 a	15.01 a	19.59 a	8.1 a	11.84 a	18.64 a	23.47 a		
	16	5.47 a	7.42 a	11.76 a	15.06 a	3.65 a	6.08 a	8.56 a	13.54 a	17.25 a	6.21 a	8.99 a	14.87 a	19.44 a	7.96 a	11.69 a	18.48 a	23.31 a		
	24	5.22 a	7.16 a	11.52 a	14.81 a	3.35 a	5.81 a	8.28 a	13.24 a	16.95 a	5.94 a	8.71 a	14.57 a	19.13 a	7.69 a	11.39 a	18.17 a	23 a		

5 psf Lateral Load (Interior Walls Only)

Wall Height (ft)	Spacing (in.) o.c.	800S137-(mils)					800S162-(mils)						800S200-(mils)					
		33 ksi		50 ksi			33 ksi		50 ksi				33 ksi		50 ksi			
		33	43	54	68	97	33	43	54	68	97	118	33	43	54	68	97	118
8	12	1.7 a*	2.43 a	3.56 a	4.73 a	7.23 a	2.38 a*	3.35 a	5.42 a	7.23 a	11.25 a	14.31 a	2.95 a*	4.49 a	7.74 a	10.27 a	15.96 a	20.43 a
	16	1.67 a*	2.4 a	3.54 a	4.72 a	7.21 a	2.35 a*	3.33 a	5.4 a	7.21 a	11.23 a	14.29 a	2.92 a*	4.46 a	7.72 a	10.24 a	15.93 a	20.41 a
	24	1.62 a*	2.36 a	3.5 a	4.68 a	7.18 a	2.28 a*	3.27 a	5.35 a	7.16 a	11.18 a	14.24 a	2.84 a*	4.4 a	7.66 a	10.19 a	15.88 a	20.35 a
9	12	1.68 a*	2.41 a	3.54 a	4.72 a	7.22 a	2.35 a*	3.33 a	5.4 a	7.21 a	11.23 a	14.29 a	2.92 a*	4.46 a	7.72 a	10.25 a	15.93 a	20.41 a
	16	1.64 a*	2.38 a	3.52 a	4.7 a	7.2 a	2.31 a*	3.3 a	5.37 a	7.18 a	11.2 a	14.26 a	2.88 a*	4.43 a	7.69 a	10.21 a	15.9 a	20.38 a
	24	1.57 a*	2.32 a	3.47 a	4.65 a	7.16 a	2.22 a*	3.23 a	5.31 a	7.12 a	11.15 a	14.21 a	2.78 a*	4.35 a	7.61 a	10.14 a	15.83 a	20.31 a
10	12	1.65 a*	2.39 a	3.53 a	4.7 a	7.2 a	2.32 a*	3.31 a	5.38 a	7.19 a	11.21 a	14.27 a	2.89 a*	4.44 a	7.7 a	10.22 a	15.91 a	20.39 a
	16	1.61 a*	2.35 a	3.5 a	4.68 a	7.18 a	2.27 a*	3.26 a	5.34 a	7.15 a	11.18 a	14.24 a	2.83 a*	4.39 a	7.65 a	10.18 a	15.87 a	20.34 a
	24	1.52 a*	2.28 a	3.44 a	4.62 a	7.13 a	2.16 a*	3.18 a	5.27 a	7.08 a	11.11 a	14.17 a	2.71 a*	4.3 a	7.56 a	10.09 a	15.79 a	20.26 a
12	12	1.59 a*	2.34 a	3.49 a	4.67 a	7.17 a	2.25 a*	3.25 a	5.33 a	7.14 a	11.17 a	14.23 a	2.8 a*	4.37 a	7.63 a	10.17 a	15.86 a	20.33 a
	16	1.53 a*	2.29 a	3.45 a	4.63 a	7.13 a	2.17 a*	3.19 a	5.28 a	7.09 a	11.12 a	14.18 a	2.72 a*	4.3 a	7.57 a	10.1 a	15.8 a	20.27 a
	24	1.4 a*	2.18 a	3.37 a	4.55 a	7.06 a	2.02 a*	3.06 a	5.17 a	6.98 a	11.02 a	14.08 a	2.55 a*	4.17 a	7.44 a	9.98 a	15.68 a	20.14 a
14	12	1.52 a*	2.28 a	3.44 a	4.62 a	7.13 a	2.17 a*	3.18 a	5.27 a	7.08 a	11.11 a	14.17 a	2.68 a*	4.23 a	7.39 a	9.91 a	15.7 a	20.26 a
	16	1.44 a*	2.21 a	3.39 a	4.57 a	7.08 a	2.06 a*	3.1 a	5.2 a	7.01 a	11.04 a	14.11 a	2.57 a*	4.14 a	7.3 a	9.83 a	15.62 a	20.18 a
	24	1.26 a*	2.07 a	3.28 a	4.46 a	6.98 a	1.85 a*	2.93 a	5.05 a	6.87 a	10.91 a	13.97 a	2.34 a*	3.97 a	7.14 a	9.66 a	15.46 a	20.01 a
16	12	1.44 a*	2.22 a	3.39 a	4.57 a	7.09 a	2.07 a*	3.1 a	5.2 a	7.02 a	11.05 a	14.11 a	2.53 a*	4.05 a	7.05 a	9.49 a	15.09 a	19.6 a
	16	1.33 a*	2.13 a	3.32 a	4.5 a	7.02 a	1.93 a*	2.99 a	5.11 a	6.92 a	10.96 a	14.02 a	2.38 a*	3.94 a	6.95 a	9.39 a	14.99 a	19.49 a
	24	1.1 a*	1.94 a	3.17 a	4.36 a	6.9 a	1.65 a*	2.77 a	4.91 a	6.73 a	10.79 a	13.85 a	2.09 a*	3.72 a	6.73 a	9.18 a	14.78 a	19.28 a

5 psf Lateral Load (Interior Walls Only)

Wall Height (ft)	Spacing (in.) o.c.	800S250-(mils)					800S300-(mils)				800S350-(mils)			
		33 ksi		50 ksi			50 ksi				50 ksi			
		43	54	68	97	118	54	68	97	118	54	68	97	118
8	12	4.89 a	8.13 a	11.73 a	19.55 a	25.43 a	8.48 a	12 a	21.32 a	27.8 a	10.93 a	15.73 a	25.86 a	34.32 a
	16	4.86 a	8.1 a	11.7 a	19.52 a	25.4 a	8.45 a	11.97 a	21.28 a	27.76 a	10.9 a	15.7 a	25.83 a	34.28 a
	24	4.8 a	8.04 a	11.64 a	19.45 a	25.33 a	8.39 a	11.91 a	21.21 a	27.69 a	10.84 a	15.64 a	25.75 a	34.2 a
9	12	4.85 a	8.07 a	11.67 a	19.45 a	25.26 a	8.41 a	11.92 a	21.14 a	27.58 a	10.83 a	15.61 a	25.7 a	34.05 a
	16	4.82 a	8.03 a	11.63 a	19.4 a	25.22 a	8.37 a	11.88 a	21.1 a	27.54 a	10.79 a	15.57 a	25.65 a	34 a
	24	4.74 a	7.96 a	11.55 a	19.32 a	25.13 a	8.3 a	11.8 a	21.01 a	27.45 a	10.71 a	15.48 a	25.56 a	33.91 a
10	12	4.81 a	8 a	11.59 a	19.32 a	25.05 a	8.33 a	11.81 a	20.93 a	27.32 a	10.71 a	15.46 a	25.46 a	33.74 a
	16	4.76 a	7.96 a	11.54 a	19.27 a	25 a	8.28 a	11.76 a	20.88 a	27.27 a	10.66 a	15.41 a	25.4 a	33.68 a
	24	4.66 a	7.86 a	11.45 a	19.16 a	24.89 a	8.19 a	11.67 a	20.77 a	27.16 a	10.56 a	15.31 a	25.29 a	33.57 a
12	12	4.7 a	7.82 a	11.38 a	18.99 a	24.47 a	8.13 a	11.53 a	20.37 a	26.64 a	10.41 a	15.09 a	24.78 a	32.99 a
	16	4.63 a	7.76 a	11.32 a	18.92 a	24.39 a	8.06 a	11.47 a	20.3 a	26.56 a	10.34 a	15.02 a	24.7 a	32.91 a
	24	4.49 a	7.63 a	11.18 a	18.77 a	24.24 a	7.92 a	11.33 a	20.14 a	26.4 a	10.2 a	14.87 a	24.54 a	32.74 a
14	12	4.56 a	7.58 a	11.02 a	18.34 a	23.64 a	7.86 a	11.17 a	19.63 a	25.73 a	10.04 a	14.6 a	23.95 a	31.77 a
	16	4.46 a	7.49 a	10.93 a	18.24 a	23.54 a	7.77 a	11.08 a	19.53 a	25.63 a	9.95 a	14.51 a	23.84 a	31.66 a
	24	4.28 a	7.32 a	10.75 a	18.05 a	23.33 a	7.59 a	10.91 a	19.33 a	25.42 a	9.77 a	14.32 a	23.63 a	31.44 a
16	12	4.38 a	7.26 a	10.54 a	17.48 a	22.56 a	7.53 a	10.72 a	18.72 a	24.64 a	9.61 a	14.03 a	23.01 a	30.13 a
	16	4.26 a	7.15 a	10.43 a	17.36 a	22.43 a	7.42 a	10.61 a	18.6 a	24.51 a	9.5 a	13.91 a	22.88 a	30 a
	24	4.03 a	6.94 a	10.2 a	17.11 a	22.17 a	7.19 a	10.39 a	18.35 a	24.25 a	9.26 a	13.67 a	22.61 a	29.73 a

See Combined Axial and Lateral Load Table Notes.

Combined Axial and Lateral Load Tables

15 psf Lateral Load

Wall Height (ft)	Spacing (in.) o.c.	362S137-(mils)				362S162-(mils)						362S200-(mils)						362S250-(mils)			
		33 ksi		50 ksi		33 ksi		50 ksi				33 ksi		50 ksi				33 ksi		50 ksi	
		33	43	54	68	33	43	54	68			33	43	54	68			43	54	68	97
8	12	1.13 a	1.75 a	2.85 a	3.82 a	1.5 a	2.18 a	3.69 a	4.85 a	7.21 a		1.87 a	2.88 a	4.72 a	7.6 a	8.92 a		3.3 a	5.37 a	7.17 a	10.24 a
	16	0.96 a	1.58 a	2.71 a	3.7 a	1.32 a	2 a	3.54 a	4.72 a	7.08 a		1.67 a	2.69 a	4.55 a	7.4 a	8.78 a		3.09 a	5.19 a	6.99 a	10.08 a
	24	0.63 b	1.25 a	2.45 a	3.47 a	0.96 a	1.66 a	3.25 a	4.45 a	6.82 a		1.27 a	2.3 a	4.22 a	7.01 a	8.5 a		2.68 a	4.83 a	6.64 a	9.76 a
9	12	0.97 a	1.57 a	2.61 a	3.54 a	1.31 a	1.96 a	3.39 a	4.47 a	6.66 a		1.65 a	2.62 a	4.32 a	7.01 a	8.21 a		3.05 a	5 a	6.58 a	9.45 a
	16	0.77 a	1.37 a	2.45 a	3.4 a	1.09 a	1.75 a	3.21 a	4.31 a	6.5 a		1.41 a	2.39 a	4.12 a	6.78 a	8.05 a		2.79 a	4.78 a	6.37 a	9.26 a
	24	0.36 c	0.96 b	2.13 a	3.12 a	0.65 c	1.33 a	2.86 a	4 a	6.19 a		0.93 b	1.92 a	3.72 a	6.32 a	7.72 a		2.28 a	4.35 a	5.95 a	8.87 a
10	12	0.8 b	1.38 a	2.35 a	3.23 a	1.11 a	1.63 a	3.06 a	4.06 a	6.05 a		1.43 a	2.35 a	3.89 a	6.35 a	7.45 a		2.77 a	4.59 a	5.96 a	8.61 a
	16	0.56 c	1.13 b	2.17 a	3.07 a	0.85 b	1.4 a	2.86 a	3.88 a	5.87 a		1.14 a	2.07 a	3.67 a	6.08 a	7.27 a		2.47 a	4.33 a	5.72 a	8.39 a
	24	0.07 e	0.65 d	1.79 c	2.74 b	0.33 d	0.93 c	2.45 b	3.52 a	5.51 a		0.56 c	1.52 b	3.21 a	5.55 a	6.89 a		1.86 a	3.82 a	5.24 a	7.95 a
12	12	0.44 d	0.96 c	1.82 b	2.58 a	0.69 d	1.32 b	2.35 a	3.19 a	4.78 a		0.95 c	1.77 a	2.99 a	4.95 a	5.89 a		2.13 a	3.55 a	4.68 a	6.87 a
	16	0.12 e	0.64 d	1.59 c	2.38 b	0.35 e	0.99 d	2.1 c	2.98 b	4.57 a		0.57 d	1.42 c	2.72 b	4.63 a	5.67 a		1.73 b	3.25 a	4.4 a	6.61 a
	24			1.13 d	1.98 d		0.32 e	1.61 d	2.54 d	4.14 b		-0.18 e	0.7 d	2.17 d	4 c	5.23 a		0.94 d	2.63 c	3.82 b	6.09 a
14	12	0.08 e	0.54 e	1.33 d	1.98 c	0.28 e	0.84 d	1.73 d	2.44 c	3.7 a		0.47 e	1.2 d	2.21 c	3.75 b	4.59 a		1.48 c	2.64 b	3.58 a	5.37 a
	16		0.16 e	1.06 e	1.75 d		0.44 e	1.45 e	2.2 d	3.46 c		0.02 e	0.78 e	1.9 d	3.4 c	4.34 b		1.01 d	2.3 c	3.26 b	5.08 a
	24			0.53 f	1.3 e			0.9 f	1.71 e	3 d				1.29 e	2.7 e	3.86 d		0.08 e	1.61 e	2.63 d	4.51 c
16	12		0.16 f	0.91 e	1.47 e		0.4 e	1.22 e	1.83 d	2.85 c		0.05 f	0.69 e	1.59 d	2.81 d	3.57 b		0.89 e	1.92 d	2.71 c	4.2 a
	16			0.61 f	1.22 e			0.92 f	1.57 e	2.6 d			0.23 f	1.26 e	2.43 e	3.31 d		0.37 e	1.55 e	2.37 d	3.89 c
	24			0.03 f	0.73 f			0.32 f	1.04 f	2.09 e				0.6 f	1.69 f	2.79 e			0.81 f	1.68 e	3.27 d

15 psf Lateral Load

Wall Height (ft)	Spacing (in.) o.c.	362S300-(mils)			600S137-(mils)						600S162-(mils)						600S200-(mils)	
		50 ksi			33 ksi		50 ksi				33 ksi		50 ksi				33 ksi	
		54	68	97	33	43	54	68			33	43	54	68	97	118	33	43
8	12	5.26 a	7.47 a	11.32 a	1.46 a	2.21 a	3.55 a	4.79 a	7.3 a		2.11 a	3.09 a	5.3 a	7.14 a	11.06 a	13.89 a	2.51 a	3.92 a
	16	5.02 a	7.22 a	11.1 a	1.33 a	2.08 a	3.44 a	4.68 a	7.21 a		1.97 a	2.96 a	5.16 a	7.01 a	10.93 a	13.76 a	2.35 a	3.75 a
	24	4.55 a	6.74 a	10.66 a	1.05 a	1.81 a	3.23 a	4.47 a	7.02 a		1.68 a	2.68 a	4.9 a	6.76 a	10.67 a	13.49 a	2.03 a	3.42 a
9	12	4.85 a	6.86 a	10.56 a	1.35 a	2.1 a	3.47 a	4.7 a	7.23 a		1.99 a	2.98 a	5.19 a	7.04 a	10.95 a	13.79 a	2.36 a	3.75 a
	16	4.57 a	6.57 a	10.29 a	1.18 a	1.93 a	3.33 a	4.57 a	7.11 a		1.81 a	2.81 a	5.02 a	6.88 a	10.79 a	13.62 a	2.17 a	3.55 a
	24	3.99 a	6 a	9.77 a	0.83 a	1.6 a	3.05 a	4.3 a	6.86 a		1.45 a	2.46 a	4.69 a	6.56 a	10.46 a	13.28 a	1.77 a	3.14 a
10	12	4.42 a	6.24 a	9.6 a	1.23 a	1.98 a	3.37 a	4.61 a	7.14 a		1.85 a	2.84 a	5.06 a	6.93 a	10.84 a	13.67 a	2.21 a	3.57 a
	16	4.08 a	5.9 a	9.3 a	1.02 a	1.78 a	3.2 a	4.44 a	6.99 a		1.63 a	2.63 a	4.85 a	6.73 a	10.64 a	13.46 a	1.96 a	3.32 a
	24	3.41 a	5.24 a	8.7 a	0.59 a	1.36 a	2.86 a	4.11 a	6.69 a		1.18 a	2.2 a	4.44 a	6.34 a	10.23 a	13.04 a	1.48 a	2.81 a
12	12	3.57 a	5 a	7.64 a	0.95 a	1.71 a	3.15 a	4.39 a	6.94 a		1.52 a	2.51 a	4.64 a	6.54 a	10.57 a	13.39 a	1.84 a	3.14 a
	16	3.14 b	4.59 a	7.27 a	0.64 a	1.41 a	2.9 a	4.15 a	6.73 a		1.21 a	2.2 a	4.35 a	6.26 a	10.28 a	13.09 a	1.5 a	2.79 a
	24	2.27 d	3.76 c	6.55 a	0.02 c	0.81 b	2.41 a	3.67 a	6.29 a		0.58 c	1.6 a	3.78 a	5.71 a	9.69 a	12.49 a	0.81 b	2.09 a
14	12	2.66 c	3.79 b	5.94 a	0.61 b	1.39 a	2.88 a	4.13 a	6.71 a		1.15 a	2.11 a	4.13 a	5.95 a	9.93 a	13.07 a	1.42 a	2.65 a
	16	2.16 d	3.32 c	5.54 b	0.19 c	0.98 b	2.55 a	3.8 a	6.41 a		0.73 c	1.71 b	3.75 a	5.59 a	9.54 a	12.66 a	0.97 b	2.19 a
	24	1.14 e	2.39 e	4.73 d		0.17 d	1.89 c	3.15 b	5.82 a		-0.09 d	0.92 d	3.01 c	4.87 a	8.77 a	11.84 a	0.07 d	1.27 c
16	12	1.83 d	2.78 d	4.6 b	0.22 d	1.01 c	2.58 b	3.83 a	6.44 a		0.73 c	1.67 b	3.53 a	5.23 a	8.89 a	11.74 a	0.96 c	2.1 a
	16	1.28 e	2.27 e	4.16 c	-0.32 e	0.48 d	2.14 c	3.4 b	6.05 a		0.22 d	1.17 d	3.07 c	4.8 a	8.42 a	11.24 a	0.4 d	1.54 c
	24	0.18 f	1.26 f	3.29 e		-0.58 e	1.28 e	2.55 d	5.28 c		0.18 e	2.17 d	3.92 c	7.49 b	10.26 a		-0.73 e	0.4 d

15 psf Lateral Load

Wall Height (ft)	Spacing (in.) o.c.	600S200-(mils)				600S250-(mils)					600S300-(mils)				600S350-(mils)			
		50 ksi				33 ksi	50 ksi				50 ksi				50 ksi			
		54	68	97	118	43	54	68	97	118	54	68	97	118	54	68	97	118
8	12	7.11 a	9.54 a	15.01 a	19.3 a	4.39 a	7.36 a	10.67 a	17.63 a	22.51 a	7.67 a	10.85 a	18.94 a	24.61 a	9.96 a	14.45 a	23.56 a	31.11 a
	16	6.99 a	9.42 a	14.89 a	19.18 a	4.27 a	7.24 a	10.54 a	17.49 a	22.36 a	7.55 a	10.73 a	18.8 a	24.47 a	9.83 a	14.32 a	23.41 a	30.95 a
	24	6.76 a	9.18 a	14.66 a	18.94 a	4.01 a	7.01 a	10.28 a	17.21 a	22.07 a	7.31 a	10.48 a	18.53 a	24.18 a	9.58 a	14.04 a	23.11 a	30.65 a
9	12	6.93 a	9.32 a	14.72 a	18.95 a	4.26 a	7.18 a	10.42 a	17.23 a	22.03 a	7.48 a	10.61 a	18.52 a	24.11 a	9.71 a	14.14 a	23.07 a	30.33 a
	16	6.78 a	9.17 a	14.58 a	18.8 a	4.1 a	7.03 a	10.26 a	17.06 a	21.85 a	7.33 a	10.46 a	18.35 a	23.93 a	9.56 a	13.97 a	22.88 a	30.13 a
	24	6.48 a	8.87 a	14.29 a	18.5 a	3.78 a	6.74 a	9.94 a	16.71 a	21.49 a	7.04 a	10.14 a	18 a	23.57 a	9.24 a	13.63 a	22.51 a	29.75 a
10	12	6.71 a	9.07 a	14.38 a	18.53 a	4.11 a	6.98 a	10.14 a	16.77 a	21.46 a	7.27 a	10.34 a	18.03 a	23.53 a	9.44 a	13.78 a	22.52 a	29.44 a
	16	6.53 a	8.89 a	14.21 a	18.35 a	3.91 a	6.8 a	9.94 a	16.56 a	21.24 a	7.09 a	10.15 a	17.82 a	23.31 a	9.25 a	13.57 a	22.3 a	29.21 a
	24	6.17 a	8.52 a	13.86 a	17.98 a	3.52 a	6.44 a	9.55 a	16.14 a	20.81 a	6.73 a	9.76 a	17.4 a	22.88 a	8.87 a	13.16 a	21.85 a	28.75 a
12	12	6.19 a	8.44 a	13.52 a	17.45 a	3.76 a	6.49 a	9.47 a	15.66 a	20.07 a	6.77 a	9.74 a	16.88 a	22.19 a	8.8 a	12.95 a	21.3 a	27.39 a
	16	5.94 a	8.19 a	13.29 a	17.2 a	3.48 a	6.24 a	9.2 a	15.37 a	19.78 a	6.52 a	9.47 a	16.6 a	21.89 a	8.54 a	12.67 a	20.99 a	27.08 a
	24	5.44 a	7.69 a	12.81 a	16.69 a	2.93 a	5.75 a	8.66 a	14.79 a	19.18 a	6.02 a	8.94 a	16.02 a	21.3 a	8.01 a	12.1 a	20.37 a	26.46 a
14	12	5.55 a	7.66 a	12.43 a	16.05 a	3.35 a	5.95 a	8.69 a	14.31 a	18.39 a	6.19 a	9.05 a	15.55 a	20.71 a	8.07 a	11.99 a	19.72 a	25.05 a
	16	5.24 a	7.35 a	12.12 a	15.73 a	2.99 a	5.63 a	8.34 a	13.94 a	18.01 a	5.86 a	8.7 a	15.19 a	20.32 a	7.73 a	11.63 a	19.32 a	24.66 a
	24	4.6 a	6.71 a	11.51 a	15.09 a	2.26 a	4.99 a	7.64 a	13.21 a	17.26 a	5.22 a	8 a	14.46 a	19.55 a	7.05 a	10.89 a	18.53 a	23.88 a
16	12	4.84 a	6.78 a	11.15 a	14.42 a	2.89 a	5.41 a	7.85 a	12.81 a	16.5 a	5.55 a	8.28 a	14.13 a	18.67 a	7.27 a	10.94 a	17.69 a	22.54 a
	16	4.46 a	6.4 a	10.79 a	14.04 a	2.44 a	5 a	7.42 a	12.37 a	16.05 a	5.15 a	7.85 a	13.68 a	18.21 a	6.86 a	10.49 a	17.22 a	22.07 a
	24	3.7 b	5.64 a	10.06 a	13.27 a	1.53 c	4.2 b	6.57 a	11.49 a	15.15 a	4.35 a	6.99 a	12.8 a	17.29 a	6.03 a	9.59 a	16.27 a	21.14 a

Combined Axial and Lateral Load Tables

15 psf Lateral Load																		
Wall Height (ft)	Spacing (in.) o.c.	800S137-(mils)					800S162-(mils)						800S200-(mils)					
		33 ksi		50 ksi			33 ksi		50 ksi				33 ksi		50 ksi			
		33	43	54	68	97	33	43	54	68	97	118	33	43	54	68	97	118
8	12	1.53 a*	2.29 a	3.45 a	4.63 a	7.13 a	2.17 a*	3.19 a	5.28 a	7.09 a	11.12 a	14.18 a	2.73 a*	4.31 a	7.58 a	10.1 a	15.8 a	20.27 a
	16	1.44 a*	2.22 a	3.39 a	4.57 a	7.09 a	2.07 a*	3.1 a	5.2 a	7.02 a	11.05 a	14.11 a	2.62 a*	4.23 a	7.49 a	10.02 a	15.72 a	20.18 a
	24	1.27 a*	2.08 a	3.28 a	4.47 a	6.99 a	1.86 a*	2.94 a	5.06 a	6.88 a	10.92 a	13.98 a	2.39 a*	4.06 a	7.32 a	9.85 a	15.56 a	20.02 a
9	12	1.46 a*	2.23 a	3.4 a	4.58 a	7.1 a	2.09 a*	3.12 a	5.22 a	7.03 a	11.06 a	14.13 a	2.64 a*	4.25 a	7.51 a	10.04 a	15.73 a	20.2 a
	16	1.35 a*	2.15 a	3.34 a	4.52 a	7.04 a	1.96 a*	3.01 a	5.13 a	6.94 a	10.98 a	14.04 a	2.5 a*	4.14 a	7.4 a	9.93 a	15.63 a	20.09 a
	24	1.14 a*	1.97 a	3.2 a	4.38 a	6.91 a	1.69 a*	2.8 a	4.94 a	6.76 a	10.81 a	13.88 a	2.21 a*	3.92 a	7.19 a	9.72 a	15.43 a	19.88 a
10	12	1.38 a*	2.17 a	3.36 a	4.54 a	7.05 a	2 a*	3.05 a	5.15 a	6.97 a	11.01 a	14.07 a	2.54 a*	4.17 a	7.43 a	9.96 a	15.66 a	20.13 a
	16	1.25 a*	2.06 a	3.27 a	4.46 a	6.98 a	1.83 a*	2.92 a	5.04 a	6.86 a	10.9 a	13.96 a	2.36 a*	4.03 a	7.3 a	9.83 a	15.54 a	20 a
	24	0.98 a*	1.85 a	3.1 a	4.29 a	6.83 a	1.51 a*	2.66 a	4.81 a	6.64 a	10.7 a	13.76 a	2.01 a*	3.76 a	7.04 a	9.57 a	15.29 a	19.73 a
12	12	1.21 a*	2.03 a	3.24 a	4.43 a	6.96 a	1.78 a*	2.87 a	5 a	6.82 a	10.87 a	13.93 a	2.3 a*	3.98 a	7.25 a	9.79 a	15.5 a	19.95 a
	16	1.02 a*	1.87 a	3.12 a	4.31 a	6.85 a	1.55 a*	2.69 a	4.84 a	6.66 a	10.72 a	13.78 a	2.05 a*	3.79 a	7.06 a	9.6 a	15.32 a	19.76 a
	24	0.63 a*	1.56 a	2.87 a	4.07 a	6.63 a	1.08 a*	2.31 a	4.51 a	6.34 a	10.43 a	13.49 a	1.54 a*	3.4 a	6.68 a	9.23 a	14.96 a	19.39 a
14	12	1 a*	1.86 a	3.11 a	4.3 a	6.84 a	1.53 a*	2.67 a	4.82 a	6.65 a	10.71 a	13.77 a	2 a*	3.71 a	6.88 a	9.41 a	15.21 a	19.75 a
	16	0.74 a*	1.65 a	2.94 a	4.14 a	6.69 a	1.21 a*	2.42 a	4.6 a	6.43 a	10.51 a	13.57 a	1.66 a*	3.45 a	6.63 a	9.16 a	14.97 a	19.49 a
	24	0.21 a*	1.22 a	2.61 a	3.81 a	6.4 a	0.57 a*	1.9 a	4.15 a	6 a	10.11 a	13.17 a	0.98 a*	2.93 a	6.12 a	8.66 a	14.48 a	18.98 a
16	12	0.76 a*	1.67 a	2.96 a	4.15 a	6.7 a	1.23 a*	2.44 a	4.62 a	6.45 a	10.53 a	13.59 a	1.66 a*	3.39 a	6.42 a	8.86 a	14.48 a	18.95 a
	16	0.42 a*	1.39 a	2.74 a	3.94 a	6.51 a	0.82 a*	2.1 a	4.33 a	6.17 a	10.26 a	13.32 a	1.22 a*	3.06 a	6.1 a	8.54 a	14.17 a	18.63 a
	24		0.84 a	2.3 a	3.52 a	6.13 a		1.44 a	3.74 a	5.6 a	9.74 a	12.8 a	0.35 a*	2.4 a	5.46 a	7.91 a	13.56 a	17.98 a

15 psf Lateral Load																	
Wall Height (ft)	Spacing (in.) o.c.	800S250-(mils)					800S300-(mils)					800S350-(mils)					
		33 ksi 43	50 ksi				33 ksi 43	50 ksi				33 ksi 43	50 ksi				
			54	68	97	118		54	68	97	118		54	68	97	118	
8	12	4.71 a	7.95 a	11.55 a	19.35 a	25.22 a	8.3 a	11.82 a	21.11 a	27.58 a	10.74 a	15.54 a	25.64 a	34.09 a			
	16	4.61 a	7.86 a	11.46 a	19.24 a	25.11 a	8.2 a	11.73 a	21.01 a	27.47 a	10.64 a	15.44 a	25.53 a	33.97 a			
	24	4.43 a	7.69 a	11.27 a	19.04 a	24.89 a	8.02 a	11.55 a	20.8 a	27.25 a	10.45 a	15.24 a	25.31 a	33.74 a			
9	12	4.62 a	7.85 a	11.44 a	19.19 a	24.99 a	8.18 a	11.69 a	20.88 a	27.31 a	10.59 a	15.36 a	25.42 a	33.76 a			
	16	4.5 a	7.74 a	11.32 a	19.06 a	24.86 a	8.06 a	11.57 a	20.75 a	27.17 a	10.47 a	15.24 a	25.28 a	33.62 a			
	24	4.26 a	7.51 a	11.08 a	18.8 a	24.58 a	7.83 a	11.34 a	20.49 a	26.9 a	10.22 a	14.99 a	25 a	33.33 a			
10	12	4.52 a	7.73 a	11.3 a	19 a	24.72 a	8.05 a	11.53 a	20.61 a	26.99 a	10.41 a	15.16 a	25.12 a	33.39 a			
	16	4.37 a	7.59 a	11.16 a	18.84 a	24.55 a	7.9 a	11.39 a	20.45 a	26.82 a	10.26 a	15 a	24.95 a	33.21 a			
	24	4.08 a	7.32 a	10.87 a	18.53 a	24.22 a	7.62 a	11.11 a	20.13 a	26.48 a	9.97 a	14.7 a	24.61 a	32.86 a			
12	12	4.28 a	7.43 a	10.98 a	18.54 a	24 a	7.72 a	11.14 a	19.92 a	26.17 a	9.99 a	14.66 a	24.3 a	32.49 a			
	16	4.08 a	7.24 a	10.77 a	18.31 a	23.77 a	7.52 a	10.94 a	19.69 a	25.93 a	9.78 a	14.45 a	24.06 a	32.24 a			
	24	3.66 a	6.85 a	10.36 a	17.86 a	23.3 a	7.12 a	10.54 a	19.24 a	25.46 a	9.37 a	14.02 a	23.58 a	31.74 a			
14	12	4 a	7.06 a	10.48 a	17.75 a	23.02 a	7.32 a	10.64 a	19.03 a	25.11 a	9.49 a	14.04 a	23.32 a	31.11 a			
	16	3.72 a	6.8 a	10.2 a	17.45 a	22.71 a	7.05 a	10.38 a	18.74 a	24.8 a	9.21 a	13.75 a	23 a	30.78 a			
	24	3.17 a	6.28 a	9.66 a	16.85 a	22.09 a	6.52 a	9.85 a	18.14 a	24.17 a	8.66 a	13.19 a	22.37 a	30.13 a			
16	12	3.67 a	6.61 a	9.86 a	16.74 a	21.78 a	6.85 a	10.05 a	17.98 a	23.86 a	8.92 a	13.31 a	22.21 a	29.32 a			
	16	3.31 a	6.28 a	9.52 a	16.36 a	21.39 a	6.51 a	9.72 a	17.61 a	23.47 a	8.57 a	12.95 a	21.82 a	28.91 a			
	24	2.6 a	5.63 a	8.83 a	15.62 a	20.61 a	5.83 a	9.05 a	16.86 a	22.68 a	7.87 a	12.24 a	21.02 a	28.1 a			

See Combined Axial and Lateral Load Table Notes.

Combined Axial and Lateral Load Tables

20 psf Lateral Load

Wall Height (ft)	Spacing (in.) o.c.	362S137-(mils)				362S162-(mils)					362S200-(mils)					362S250-(mils)			
		33 ksi		50 ksi		33 ksi		50 ksi			33 ksi		50 ksi			33 ksi		50 ksi	
		33	43	54	68	33	43	54	68	97	33	43	54	68	97	43	54	68	97
8	12	0.96 a	1.58 a	2.71 a	3.7 a	1.32 a	2 a	3.54 a	4.72 a	7.08 a	1.67 a	2.69 a	4.55 a	7.4 a	8.78 a	3.09 a	5.19 a	6.99 a	10.08 a
	16	0.74 a	1.36 a	2.54 a	3.55 a	1.08 a	1.77 a	3.35 a	4.54 a	6.9 a	1.4 a	2.43 a	4.33 a	7.14 a	8.6 a	2.82 a	4.95 a	6.76 a	9.86 a
	24	0.31 c	0.92 b	2.18 a	3.24 a	0.6 b	1.31 a	2.96 a	4.19 a	6.55 a	0.87 b	1.92 a	3.88 a	6.62 a	8.22 a	2.26 a	4.47 a	6.29 a	9.43 a
9	12	0.77 a	1.37 a	2.45 a	3.4 a	1.09 a	1.75 a	3.21 a	4.31 a	6.5 a	1.41 a	2.39 a	4.12 a	6.78 a	8.05 a	2.79 a	4.78 a	6.37 a	9.26 a
	16	0.5 c	1.09 b	2.24 a	3.22 a	0.8 b	1.47 a	2.98 a	4.1 a	6.29 a	1.09 a	2.07 a	3.85 a	6.47 a	7.83 a	2.45 a	4.49 a	6.09 a	9 a
	24		0.55 d	1.81 c	2.84 b	0.21 d	0.91 c	2.51 b	3.69 a	5.87 a	0.44 c	1.45 b	3.32 a	5.85 a	7.39 a	1.77 a	3.91 a	5.53 a	8.49 a
10	12	0.56 c	1.13 b	2.17 a	3.07 a	0.85 b	1.4 a	2.86 a	3.88 a	5.87 a	1.14 a	2.07 a	3.67 a	6.08 a	7.27 a	2.47 a	4.33 a	5.72 a	8.39 a
	16	0.24 d	0.81 c	1.92 b	2.85 a	0.5 d	1.09 c	2.59 a	3.64 a	5.63 a	0.75 c	1.7 b	3.36 a	5.73 a	7.02 a	2.06 a	3.99 a	5.4 a	8.1 a
	24		0.16 e	1.42 d	2.42 c		0.47 d	2.05 c	3.16 b	5.15 a		0.96 d	2.75 c	5.02 b	6.52 a	1.25 c	3.31 b	4.76 a	7.51 a
12	12	0.12 e	0.64 d	1.59 c	2.38 b	0.35 e	0.99 d	2.1 c	2.98 b	4.57 a	0.57 d	1.42 c	2.72 b	4.63 a	5.67 a	1.73 b	3.25 a	4.4 a	6.61 a
	16		0.21 e	1.28 d	2.12 d		0.54 e	1.78 d	2.69 c	4.28 b	0.07 e	0.94 d	2.35 c	4.21 b	5.38 a	1.21 d	2.84 c	4.01 a	6.26 a
	24			0.66 e	1.58 e			1.12 e	2.11 e	3.72 d			1.62 e	3.37 d	4.79 c	0.16 e	2.02 d	3.25 c	5.56 b
14	12		0.16 e	1.06 e	1.75 d		0.44 e	1.45 e	2.2 d	3.46 c	0.02 e	0.78 e	1.9 d	3.4 c	4.34 b	1.01 d	2.3 c	3.26 b	5.08 a
	16			0.71 f	1.45 e			1.08 e	1.87 e	3.15 d		0.22 e	1.5 e	2.93 d	4.02 c	0.39 e	1.84 d	2.84 d	4.7 b
	24				0.84 f			0.35 f	1.22 f	2.53 e			0.68 f	2 e	3.37 e		0.93 e	1.99 e	3.93 d
16	12			0.61 f	1.22 e			0.92 f	1.57 e	2.6 d		0.23 f	1.26 e	2.43 e	3.31 d	0.37 e	1.55 e	2.37 d	3.89 c
	16			0.23 f	0.9 f			0.52 f	1.22 f	2.26 e			0.82 f	1.94 e	2.96 e		1.06 e	1.91 e	3.47 d
	24				0.24 f				0.52 f	1.59 f				0.94 f	2.27 f		0.07 f	1 f	2.65 e

20 psf Lateral Load

Wall Height (ft)	Spacing (in.) o.c.	362S300-(mils)			600S137-(mils)						600S162-(mils)						600S200-(mils)	
		50 ksi			33 ksi		50 ksi				33 ksi		50 ksi				33 ksi	
		54	68	97	33	43	54	68	97		33	43	54	68	97	118	33	43
8	12	5.26 a	7.47 a	11.32 a	1.46 a	2.21 a	3.55 a	4.79 a	7.3 a		2.11 a	3.09 a	5.3 a	7.14 a	11.06 a	13.89 a	2.51 a	3.92 a
	16	5.02 a	7.22 a	11.1 a	1.33 a	2.08 a	3.44 a	4.68 a	7.21 a		1.97 a	2.96 a	5.16 a	7.01 a	10.93 a	13.76 a	2.35 a	3.75 a
	24	4.55 a	6.74 a	10.66 a	1.05 a	1.81 a	3.23 a	4.47 a	7.02 a		1.68 a	2.68 a	4.9 a	6.76 a	10.67 a	13.49 a	2.03 a	3.42 a
9	12	4.85 a	6.86 a	10.56 a	1.35 a	2.1 a	3.47 a	4.7 a	7.23 a		1.99 a	2.98 a	5.19 a	7.04 a	10.95 a	13.79 a	2.36 a	3.75 a
	16	4.57 a	6.57 a	10.29 a	1.18 a	1.93 a	3.33 a	4.57 a	7.11 a		1.81 a	2.81 a	5.02 a	6.88 a	10.79 a	13.62 a	2.17 a	3.55 a
	24	3.99 a	6 a	9.77 a	0.83 a	1.6 a	3.05 a	4.3 a	6.86 a		1.45 a	2.46 a	4.69 a	6.56 a	10.46 a	13.28 a	1.77 a	3.14 a
10	12	4.42 a	6.24 a	9.6 a	1.23 a	1.98 a	3.37 a	4.61 a	7.14 a		1.85 a	2.84 a	5.06 a	6.93 a	10.84 a	13.67 a	2.21 a	3.57 a
	16	4.08 a	5.9 a	9.3 a	1.02 a	1.78 a	3.2 a	4.44 a	6.99 a		1.63 a	2.63 a	4.85 a	6.73 a	10.64 a	13.46 a	1.96 a	3.32 a
	24	3.41 a	5.24 a	8.7 a	0.59 a	1.36 a	2.86 a	4.11 a	6.69 a		1.18 a	2.2 a	4.44 a	6.34 a	10.23 a	13.04 a	1.48 a	2.81 a
12	12	3.57 a	5 a	7.64 a	0.95 a	1.71 a	3.15 a	4.39 a	6.94 a		1.52 a	2.51 a	4.64 a	6.54 a	10.57 a	13.39 a	1.84 a	3.14 a
	16	3.14 b	4.59 a	7.27 a	0.64 a	1.41 a	2.9 a	4.15 a	6.73 a		1.21 a	2.2 a	4.35 a	6.26 a	10.28 a	13.09 a	1.5 a	2.79 a
	24	2.27 d	3.76 c	6.55 a	0.02 c	0.81 b	2.41 a	3.67 a	6.29 a		0.58 c	1.6 a	3.78 a	5.71 a	9.69 a	12.49 a	0.81 b	2.09 a
14	12	2.66 c	3.79 b	5.94 a	0.61 b	1.39 a	2.88 a	4.13 a	6.71 a		1.15 a	2.11 a	4.13 a	5.95 a	9.93 a	13.07 a	1.42 a	2.65 a
	16	2.16 d	3.32 c	5.54 b	0.19 c	0.98 b	2.55 a	3.8 a	6.41 a		0.73 c	1.71 b	3.75 a	5.59 a	9.54 a	12.66 a	0.97 b	2.19 a
	24	1.14 e	2.39 e	4.73 d		0.17 d	1.89 c	3.15 b	5.82 a			0.92 d	3.01 c	4.87 a	8.77 a	11.84 a	0.07 d	1.27 c
16	12	1.83 d	2.78 d	4.6 b	0.22 d	1.01 c	2.58 b	3.83 a	6.44 a		0.73 c	1.67 b	3.53 a	5.23 a	8.89 a	11.74 a	0.96 c	2.1 a
	16	1.28 e	2.27 e	4.16 c		0.48 d	2.14 c	3.4 b	6.05 a		0.22 d	1.17 d	3.07 c	4.8 a	8.42 a	11.24 a	0.4 d	1.54 c
	24	0.18 f	1.26 f	3.29 e			1.28 e	2.55 d	5.28 c		0.18 e	2.17 d	3.92 c	7.49 b	10.26 a		0.4 d	

20 psf Lateral Load

Wall Height (ft)	Spacing (in.) o.c.	600S200-(mils)				600S250-(mils)				600S300-(mils)				600S350-(mils)				
		50 ksi				33 ksi	50 ksi			50 ksi				50 ksi				
		54	68	97	118		43	54	68	97	118	54	68	97	118	54	68	97
8	12	6.99 a	9.42 a	14.89 a	19.18 a	4.27 a	7.24 a	10.54 a	17.49 a	22.36 a	7.55 a	10.73 a	18.8 a	24.47 a	9.83 a	14.32 a	23.41 a	30.95 a
	16	6.84 a	9.26 a	14.74 a	19.02 a	4.1 a	7.08 a	10.37 a	17.3 a	22.17 a	7.39 a	10.56 a	18.62 a	24.28 a	9.67 a	14.13 a	23.21 a	30.75 a
	24	6.52 a	8.94 a	14.43 a	18.69 a	3.76 a	6.77 a	10.02 a	16.93 a	21.79 a	7.07 a	10.22 a	18.25 a	23.89 a	9.33 a	13.77 a	22.81 a	30.34 a
9	12	6.78 a	9.17 a	14.58 a	18.8 a	4.1 a	7.03 a	10.26 a	17.06 a	21.85 a	7.33 a	10.46 a	18.35 a	23.93 a	9.56 a	13.97 a	22.88 a	30.13 a
	16	6.58 a	8.97 a	14.39 a	18.6 a	3.89 a	6.84 a	10.04 a	16.83 a	21.61 a	7.13 a	10.25 a	18.12 a	23.69 a	9.35 a	13.74 a	22.63 a	29.88 a
	24	6.19 a	8.58 a	14.01 a	18.2 a	3.46 a	6.45 a	9.61 a	16.36 a	21.13 a	6.74 a	9.82 a	17.66 a	23.21 a	8.93 a	13.29 a	22.14 a	29.37 a
10	12	6.53 a	8.89 a	14.21 a	18.35 a	3.91 a	6.8 a	9.94 a	16.56 a	21.24 a	7.09 a	10.15 a	17.82 a	23.31 a	9.25 a	13.57 a	22.3 a	29.21 a
	16	6.29 a	8.64 a	13.98 a	18.1 a	3.65 a	6.56 a	9.68 a	16.28 a	20.95 a	6.85 a	9.89 a	17.54 a	23.03 a	8.99 a	13.3 a	22 a	28.9 a
	24	5.81 a	8.16 a	13.51 a	17.61 a	3.13 a	6.08 a	9.16 a	15.72 a	20.38 a	6.37 a	9.38 a	16.99 a	22.45 a	8.48 a	12.75 a	21.4 a	28.29 a
12	12	5.94 a	8.19 a	13.29 a	17.2 a	3.48 a	6.24 a	9.2 a	15.37 a	19.78 a	6.52 a	9.47 a	16.6 a	21.89 a	8.54 a	12.67 a	20.99 a	27.08 a
	16	5.61 a	7.86 a	12.97 a	16.86 a	3.12 a	5.91 a	8.84 a	14.98 a	19.38 a	6.19 a	9.12 a	16.21 a	21.49 a	8.19 a	12.29 a	20.57 a	26.66 a
	24	4.95 a	7.2 a	12.33 a	16.19 a	2.38 a	5.25 a	8.12 a	14.22 a	18.59 a	5.52 a	8.41 a	15.45 a	20.7 a	7.49 a	11.53 a	19.75 a	25.84 a
14	12	5.24 a	7.35 a	12.12 a	15.73 a	2.99 a	5.63 a	8.34 a	13.94 a	18.01 a	5.86 a	8.7 a	15.19 a	20.32 a	7.73 a	11.63 a	19.32 a	24.66 a
	16	4.81 a	6.92 a	11.72 a	15.31 a	2.5 a	5.2 a	7.87 a	13.46 a	17.51 a	5.43 a	8.24 a	14.7 a	19.81 a	7.28 a	11.14 a	18.79 a	24.14 a
	24	3.97 b	6.08 a	10.9 a	14.45 a	1.53 b	4.34 a	6.95 a	12.48 a	16.51 a	4.57 a	7.31 a	13.72 a	18.78 a	6.37 a	10.16 a	17.74 a	23.1 a
16	12	4.46 a	6.4 a	10.79 a	14.04 a	2.44 a	5 a	7.42 a	12.37 a	16.05 a	5.15 a	7.85 a	13.68 a	18.21 a	6.86 a	10.49 a	17.22 a	22.07 a
	16	3.95 b	5.89 a	10.3 a	13.53 a	1.83 b	4.47 a	6.86 a	11.79 a	15.45 a	4.62 a	7.27 a	13.09 a	17.59 a	6.3 a	9.89 a	16.59 a	21.45 a
	24	2.94 d	4.87 c	9.32 a	12.51 a	0.62 d	3.39 c	5.72 b	10.62 a	14.26 a	3.56 c	6.12 a	11.91 a	16.36 a	5.2 b	8.7 a	15.32 a	20.21 a

Combined Axial and Lateral Load Tables

20 psf Lateral Load																			
Wall Height (ft)	Spacing (in.) o.c.	800S137-(mils)						800S162-(mils)						800S200-(mils)					
		33 ksi			50 ksi			33 ksi			50 ksi			33 ksi			50 ksi		
		33	43	54	68	97	33	43	54	68	97	118	33	43	54	68	97	118	
8	12	1.44 a*	2.22 a	3.39 a	4.57 a	7.09 a	2.07 a*	3.1 a	5.2 a	7.02 a	11.05 a	14.11 a	2.62 a*	4.23 a	7.49 a	10.02 a	15.72 a	20.18 a	
	16	1.33 a*	2.13 a	3.32 a	4.5 a	7.02 a	1.93 a*	2.99 a	5.11 a	6.92 a	10.96 a	14.02 a	2.47 a*	4.11 a	7.38 a	9.91 a	15.61 a	20.07 a	
	24	1.1 a*	1.94 a	3.17 a	4.36 a	6.9 a	1.65 a*	2.77 a	4.91 a	6.73 a	10.79 a	13.85 a	2.16 a*	3.88 a	7.15 a	9.69 a	15.4 a	19.85 a	
9	12	1.35 a*	2.15 a	3.34 a	4.52 a	7.04 a	1.96 a*	3.01 a	5.13 a	6.94 a	10.98 a	14.04 a	2.5 a*	4.14 a	7.4 a	9.93 a	15.63 a	20.09 a	
	16	1.21 a*	2.03 a	3.24 a	4.43 a	6.96 a	1.78 a*	2.87 a	5 a	6.82 a	10.87 a	13.93 a	2.31 a*	3.99 a	7.26 a	9.79 a	15.5 a	19.95 a	
	24	0.92 a*	1.8 a	3.06 a	4.25 a	6.79 a	1.43 a*	2.59 a	4.76 a	6.58 a	10.65 a	13.71 a	1.93 a*	3.7 a	6.97 a	9.51 a	15.23 a	19.67 a	
10	12	1.25 a*	2.06 a	3.27 a	4.46 a	6.98 a	1.83 a*	2.92 a	5.04 a	6.86 a	10.9 a	13.96 a	2.36 a*	4.03 a	7.3 a	9.83 a	15.54 a	20 a	
	16	1.07 a*	1.92 a	3.16 a	4.35 a	6.88 a	1.62 a*	2.74 a	4.89 a	6.71 a	10.77 a	13.83 a	2.13 a*	3.85 a	7.12 a	9.66 a	15.37 a	19.82 a	
	24	0.72 a*	1.63 a	2.93 a	4.12 a	6.68 a	1.18 a*	2.39 a	4.58 a	6.41 a	10.49 a	13.55 a	1.66 a*	3.49 a	6.77 a	9.31 a	15.04 a	19.47 a	
12	12	1.02 a*	1.87 a	3.12 a	4.31 a	6.85 a	1.55 a*	2.69 a	4.84 a	6.66 a	10.72 a	13.78 a	2.05 a*	3.79 a	7.06 a	9.6 a	15.32 a	19.76 a	
	16	0.76 a*	1.67 a	2.96 a	4.15 a	6.7 a	1.23 a*	2.44 a	4.62 a	6.45 a	10.53 a	13.59 a	1.71 a*	3.53 a	6.81 a	9.35 a	15.08 a	19.51 a	
	24	0.24 a*	1.25 a	2.63 a	3.83 a	6.42 a	0.61 a*	1.94 a	4.18 a	6.02 a	10.13 a	13.19 a	1.03 a*	3.01 a	6.3 a	8.85 a	14.6 a	19.01 a	
14	12	0.74 a*	1.65 a	2.94 a	4.14 a	6.69 a	1.21 a*	2.42 a	4.6 a	6.43 a	10.51 a	13.57 a	1.66 a*	3.45 a	6.63 a	9.16 a	14.97 a	19.49 a	
	16	0.39 a*	1.37 a	2.72 a	3.92 a	6.5 a	0.78 a*	2.07 a	4.3 a	6.14 a	10.24 a	13.3 a	1.21 a*	3.11 a	6.29 a	8.82 a	14.65 a	19.15 a	
	24		0.8 a	2.27 a	3.49 a	6.11 a		1.39 a	3.7 a	5.56 a	9.7 a	12.76 a	0.3 a*	2.42 a	5.62 a	8.15 a	14 a	18.47 a	
16	12	0.42 a*	1.39 a	2.74 a	3.94 a	6.51 a	0.82 a*	2.1 a	4.33 a	6.17 a	10.26 a	13.32 a	1.22 a*	3.06 a	6.1 a	8.54 a	14.17 a	18.63 a	
	16		1.02 a	2.44 a	3.66 a	6.26 a	0.26 a*	1.66 a	3.94 a	5.79 a	9.91 a	12.97 a	0.64 a*	2.62 a	5.67 a	8.12 a	13.76 a	18.19 a	
	24		0.28 c	1.86 b	3.09 a	5.75 a		0.77 b	3.16 a	5.03 a	9.21 a	12.27 a		1.74 a	4.82 a	7.28 a	12.94 a	17.33 a	

20 psf Lateral Load																				
Wall Height (ft)	Spacing (in.) o.c.	800S250-(mils)					800S300-(mils)					800S350-(mils)								
		33 ksi		50 ksi			33 ksi		50 ksi			33 ksi		50 ksi						
		43	54	68	97	118	54	68	97	118	54	68	97	118						
8	12	4.61 a	7.86 a	11.46 a	19.24 a	25.11 a	8.2 a	11.73 a	21.01 a	27.47 a	10.64 a	15.44 a	25.53 a	33.97 a						
	16	4.49 a	7.75 a	11.33 a	19.11 a	24.97 a	8.08 a	11.61 a	20.87 a	27.33 a	10.51 a	15.31 a	25.38 a	33.82 a						
	24	4.24 a	7.51 a	11.09 a	18.83 a	24.68 a	7.83 a	11.37 a	20.59 a	27.03 a	10.26 a	15.05 a	25.09 a	33.51 a						
9	12	4.5 a	7.74 a	11.32 a	19.06 a	24.86 a	8.06 a	11.57 a	20.75 a	27.17 a	10.47 a	15.24 a	25.28 a	33.62 a						
	16	4.34 a	7.59 a	11.16 a	18.89 a	24.67 a	7.91 a	11.42 a	20.58 a	26.99 a	10.3 a	15.07 a	25.1 a	33.43 a						
	24	4.03 a	7.29 a	10.85 a	18.54 a	24.31 a	7.6 a	11.11 a	20.23 a	26.62 a	9.98 a	14.74 a	24.73 a	33.04 a						
10	12	4.37 a	7.59 a	11.16 a	18.84 a	24.55 a	7.9 a	11.39 a	20.45 a	26.82 a	10.26 a	15 a	24.95 a	33.21 a						
	16	4.18 a	7.41 a	10.97 a	18.63 a	24.33 a	7.71 a	11.2 a	20.23 a	26.6 a	10.07 a	14.8 a	24.72 a	32.98 a						
	24	3.79 a	7.04 a	10.59 a	18.21 a	23.88 a	7.33 a	10.82 a	19.81 a	26.15 a	9.67 a	14.4 a	24.27 a	32.5 a						
12	12	4.08 a	7.24 a	10.77 a	18.31 a	23.77 a	7.52 a	10.94 a	19.69 a	25.93 a	9.78 a	14.45 a	24.06 a	32.24 a						
	16	3.8 a	6.98 a	10.5 a	18.01 a	23.45 a	7.25 a	10.67 a	19.39 a	25.62 a	9.51 a	14.16 a	23.74 a	31.91 a						
	24	3.25 a	6.46 a	9.96 a	17.41 a	22.82 a	6.71 a	10.14 a	18.79 a	24.99 a	8.95 a	13.59 a	23.11 a	31.24 a						
14	12	3.72 a	6.8 a	10.2 a	17.45 a	22.71 a	7.05 a	10.38 a	18.74 a	24.8 a	9.21 a	13.75 a	23 a	30.78 a						
	16	3.35 a	6.46 a	9.84 a	17.05 a	22.3 a	6.69 a	10.02 a	18.34 a	24.38 a	8.84 a	13.38 a	22.58 a	30.34 a						
	24	2.61 a	5.77 a	9.12 a	16.25 a	21.47 a	5.98 a	9.32 a	17.55 a	23.55 a	8.1 a	12.62 a	21.74 a	29.47 a						
16	12	3.31 a	6.28 a	9.52 a	16.36 a	21.39 a	6.51 a	9.72 a	17.61 a	23.47 a	8.57 a	12.95 a	21.82 a	28.91 a						
	16	2.84 a	5.85 a	9.06 a	15.87 a	20.87 a	6.06 a	9.27 a	17.11 a	22.94 a	8.1 a	12.48 a	21.29 a	28.37 a						
	24	1.89 a	4.98 a	8.15 a	14.87 a	19.84 a	5.15 a	8.38 a	16.12 a	21.9 a	7.17 a	11.52 a	20.23 a	27.28 a						

See Combined Axial and Lateral Load Table Notes.

Combined Axial and Lateral Load Tables

25 psf Lateral Load

Wall Height (ft)	Spacing (in.) o.c.	362S137-(mils)				362S162-(mils)				362S200-(mils)				362S250-(mils)						
		33 ksi		50 ksi		33 ksi		50 ksi		33 ksi		50 ksi		33 ksi		50 ksi				
		33	43	54	68	33	43	54	68	97	33	43	54	68	97	33	43	54	68	97
8	12	0.8 a	1.41 a	2.58 a	3.58 a	1.14 a	1.83 a	3.4 a	4.58 a	6.95 a	1.47 a	2.49 a	4.38 a	7.21 a	8.64 a	2.89 a	5.01 a	6.81 a	9.92 a	
	16	0.53 b	1.14 a	2.36 a	3.39 a	0.84 a	1.54 a	3.16 a	4.37 a	6.73 a	1.14 a	2.17 a	4.11 a	6.88 a	8.41 a	2.54 a	4.71 a	6.52 a	9.65 a	
	24		0.58 c	1.92 b	3 a	0.24 c	0.97 b	2.67 a	3.93 a	6.28 a	0.48 c	1.53 a	3.55 a	6.23 a	7.94 a	1.85 a	4.11 a	5.93 a	9.11 a	
9	12	0.57 c	1.16 a	2.29 a	3.26 a	0.87 b	1.54 a	3.04 a	4.16 a	6.34 a	1.17 a	2.15 a	3.92 a	6.55 a	7.88 a	2.54 a	4.56 a	6.16 a	9.06 a	
	16	0.23 d	0.82 c	2.02 b	3.03 a	0.5 c	1.19 b	2.75 a	3.89 a	6.08 a	0.76 c	1.76 a	3.59 a	6.16 a	7.61 a	2.11 a	4.2 a	5.81 a	8.74 a	
	24		0.14 d	1.49 d	2.56 c		0.49 d	2.16 c	3.37 b	5.56 a		0.98 c	2.93 b	5.39 a	7.06 a	1.26 b	3.47 a	5.11 a	8.1 a	
10	12	0.32 d	0.89 c	1.98 b	2.9 a	0.59 c	1.16 b	2.66 a	3.7 a	5.69 a	0.85 c	1.79 a	3.44 a	5.82 a	7.08 a	2.16 a	4.08 a	5.48 a	8.17 a	
	16		0.48 d	1.67 c	2.64 b	0.15 d	0.78 d	2.32 c	3.4 a	5.39 a	0.37 d	1.33 c	3.06 b	5.37 a	6.77 a	1.65 b	3.65 a	5.08 a	7.8 a	
	24			1.05 e	2.1 d			1.65 d	2.8 c	4.8 b		0.41 d	2.29 d	4.49 c	6.14 a	0.64 d	2.8 c	4.28 b	7.07 a	
12	12		0.32 e	1.36 d	2.18 c	0.01 e	0.65 d	1.86 d	2.76 c	4.35 a	0.2 e	1.06 d	2.44 c	4.32 b	5.45 a	1.34 c	2.94 b	4.11 a	6.35 a	
	16			0.97 e	1.85 d		0.09 e	1.45 e	2.4 d	4 c		0.47 e	1.99 d	3.79 c	5.08 b	0.68 d	2.43 d	3.63 c	5.91 a	
	24			0.2 f	1.19 e			0.63 f	1.68 e	3.29 d			1.07 e	2.74 e	4.35 d		1.4 e	2.68 d	5.04 c	
14	12			0.79 e	1.52 e		0.04 f	1.17 e	1.95 e	3.23 d		0.36 e	1.6 e	3.05 d	4.1 c	0.55 e	1.96 d	2.95 c	4.8 b	
	16			0.35 f	1.15 f			0.71 f	1.55 e	2.84 e			1.09 e	2.47 e	3.69 d		1.39 e	2.41 d	4.31 c	
	24				0.39 f				0.74 f	2.06 f			0.07 f	1.3 f	2.88 e		0.24 f	1.35 e	3.35 e	
16	12			0.32 f	0.98 f			0.62 f	1.31 f	2.34 e			0.93 f	2.06 e	3.05 d		1.18 e	2.03 e	3.58 d	
	16				0.57 f			0.12 f	0.87 f	1.93 f			0.38 f	1.44 f	2.61 e		0.57 f	1.46 e	3.06 e	
	24									1.09 f				0.19 f	1.74 f			0.31 f	2.02 f	

25 psf Lateral Load

Wall Height (ft)	Spacing (in.) o.c.	362S300-(mils)			600S137-(mils)						600S162-(mils)						600S200-(mils)	
		50 ksi			33 ksi		50 ksi			33 ksi		50 ksi			33 ksi			
		54	68	97	33	43	54	68	97	33	43	54	68	97	118	33	43	
8	12	5.08 a	7.28 a	11.16 a	1.36 a	2.11 a	3.47 a	4.71 a	7.23 a	2.01 a	2.99 a	5.2 a	7.05 a	10.96 a	13.79 a	2.39 a	3.79 a	
	16	4.79 a	6.98 a	10.88 a	1.19 a	1.94 a	3.34 a	4.57 a	7.11 a	1.83 a	2.82 a	5.03 a	6.89 a	10.8 a	13.63 a	2.19 a	3.59 a	
	24	4.2 a	6.38 a	10.33 a	0.84 a	1.61 a	3.06 a	4.31 a	6.87 a	1.47 a	2.47 a	4.7 a	6.58 a	10.47 a	13.29 a	1.79 a	3.18 a	
9	12	4.64 a	6.64 a	10.36 a	1.22 a	1.98 a	3.36 a	4.6 a	7.14 a	1.85 a	2.85 a	5.06 a	6.92 a	10.83 a	13.66 a	2.22 a	3.6 a	
	16	4.28 a	6.29 a	10.03 a	1.01 a	1.77 a	3.19 a	4.43 a	6.98 a	1.63 a	2.63 a	4.86 a	6.72 a	10.63 a	13.45 a	1.97 a	3.34 a	
	24	3.56 a	5.57 a	9.37 a	0.57 a	1.35 a	2.85 a	4.09 a	6.68 a	1.17 a	2.2 a	4.44 a	6.33 a	10.21 a	13.03 a	1.47 a	2.83 a	
10	12	4.17 a	5.99 a	9.38 a	1.07 a	1.83 a	3.24 a	4.48 a	7.03 a	1.68 a	2.68 a	4.9 a	6.78 a	10.69 a	13.51 a	2.02 a	3.38 a	
	16	3.75 a	5.57 a	9 a	0.8 a	1.57 a	3.03 a	4.27 a	6.84 a	1.4 a	2.41 a	4.65 a	6.54 a	10.43 a	13.25 a	1.72 a	3.07 a	
	24	2.91 b	4.74 a	8.24 a	0.26 b	1.05 a	2.61 a	3.86 a	6.46 a	0.85 a	1.88 a	4.13 a	6.05 a	9.93 a	12.73 a	1.11 a	2.44 a	
12	12	3.25 a	4.69 a	7.36 a	0.72 a	1.49 a	2.96 a	4.21 a	6.78 a	1.29 a	2.28 a	4.43 a	6.33 a	10.35 a	13.17 a	1.58 a	2.88 a	
	16	2.71 c	4.18 b	6.91 a	0.33 b	1.11 a	2.66 a	3.91 a	6.51 a	0.9 b	1.9 a	4.07 a	5.99 a	9.99 a	12.79 a	1.16 a	2.44 a	
	24	1.62 d	3.14 d	6.01 b		0.36 c	2.05 b	3.31 a	5.97 a	0.12 d	1.15 b	3.35 a	5.3 a	9.26 a	12.04 a	0.3 c	1.56 b	
14	12	2.28 d	3.44 c	5.64 a	0.3 c	1.08 b	2.63 a	3.88 a	6.49 a	0.84 c	1.81 a	3.85 a	5.68 a	9.64 a	12.76 a	1.08 b	2.3 a	
	16	1.65 e	2.85 d	5.13 c		0.57 c	2.22 b	3.47 a	6.12 a	0.32 d	1.32 c	3.38 b	5.23 a	9.16 a	12.25 a	0.52 c	1.73 b	
	24	0.38 f	1.68 e	4.13 d			1.39 d	2.66 c	5.38 b		0.32 d	2.45 d	4.33 c	8.2 a	11.23 a		0.58 d	
16	12	1.42 e	2.4 d	4.27 c		0.61 d	2.25 c	3.51 b	6.15 a	0.35 d	1.29 c	3.19 b	4.91 a	8.54 a	11.37 a	0.54 d	1.68 c	
	16	0.73 f	1.77 e	3.73 d			1.71 d	2.97 c	5.67 b		0.67 d	2.62 d	4.36 c	7.96 a	10.75 a		0.97 d	
	24		0.5 f	2.64 e			0.63 e	1.91 e	4.71 d			1.49 e	3.27 d	6.79 c	9.52 b			

25 psf Lateral Load

Wall Height (ft)	Spacing (in.) o.c.	600S200-(mils)	
------------------	--------------------	----------------	--

Combined Axial and Lateral Load Tables

25 psf Lateral Load

Wall Height (ft)	Spacing (in.) o.c.	800S137-(mils)						800S162-(mils)						800S200-(mils)					
		33 ksi			50 ksi			33 ksi			50 ksi			33 ksi			50 ksi		
		33	43	54	68	97		33	43	54	68	97	118	33	43	54	68	97	118
8	12	1.36 a*	2.15 a	3.34 a	4.52 a	7.04 a		1.96 a*	3.02 a	5.13 a	6.95 a	10.98 a	14.05 a	2.5 a*	4.14 a	7.41 a	9.94 a	15.64 a	20.1 a
	16	1.22 a*	2.03 a	3.25 a	4.43 a	6.96 a		1.79 a*	2.88 a	5.01 a	6.83 a	10.88 a	13.94 a	2.32 a*	4 a	7.26 a	9.8 a	15.5 a	19.96 a
	24	0.93 a*	1.8 a	3.06 a	4.26 a	6.8 a		1.44 a*	2.6 a	4.76 a	6.59 a	10.66 a	13.72 a	1.94 a*	3.71 a	6.98 a	9.52 a	15.24 a	19.68 a
9	12	1.24 a*	2.06 a	3.27 a	4.45 a	6.98 a		1.83 a*	2.91 a	5.03 a	6.85 a	10.9 a	13.96 a	2.35 a*	4.03 a	7.29 a	9.83 a	15.53 a	19.99 a
	16	1.06 a*	1.91 a	3.15 a	4.34 a	6.87 a		1.61 a*	2.73 a	4.88 a	6.7 a	10.76 a	13.82 a	2.12 a*	3.85 a	7.12 a	9.65 a	15.36 a	19.81 a
	24	0.7 a*	1.62 a	2.92 a	4.12 a	6.67 a		1.17 a*	2.38 a	4.57 a	6.4 a	10.48 a	13.54 a	1.64 a*	3.48 a	6.76 a	9.3 a	15.02 a	19.46 a
10	12	1.12 a*	1.96 a	3.18 a	4.37 a	6.9 a		1.67 a*	2.79 a	4.92 a	6.75 a	10.8 a	13.86 a	2.19 a*	3.9 a	7.17 a	9.7 a	15.41 a	19.86 a
	16	0.89 a*	1.78 a	3.04 a	4.23 a	6.78 a		1.4 a*	2.57 a	4.73 a	6.56 a	10.63 a	13.69 a	1.89 a*	3.67 a	6.95 a	9.48 a	15.2 a	19.65 a
	24	0.45 a*	1.41 a	2.76 a	3.96 a	6.53 a		0.86 a*	2.13 a	4.35 a	6.19 a	10.29 a	13.35 a	1.31 a*	3.23 a	6.51 a	9.05 a	14.79 a	19.21 a
12	12	0.82 a*	1.72 a	3 a	4.19 a	6.74 a		1.31 a*	2.5 a	4.67 a	6.5 a	10.57 a	13.64 a	1.79 a*	3.59 a	6.87 a	9.41 a	15.14 a	19.58 a
	16	0.5 a*	1.46 a	2.79 a	3.99 a	6.56 a		0.92 a*	2.19 a	4.4 a	6.24 a	10.33 a	13.39 a	1.37 a*	3.27 a	6.55 a	9.1 a	14.84 a	19.26 a
	24		0.94 a	2.38 a	3.6 a	6.2 a		0.14 a*	1.56 a	3.85 a	5.7 a	9.84 a	12.9 a	0.53 a*	2.63 a	5.92 a	8.48 a	14.24 a	18.64 a
14	12	0.47 a*	1.44 a	2.77 a	3.98 a	6.55 a		0.89 a*	2.16 a	4.38 a	6.21 a	10.31 a	13.37 a	1.32 a*	3.19 a	6.38 a	8.91 a	14.73 a	19.24 a
	16	0.04 a*	1.08 a	2.49 a	3.71 a	6.3 a		0.36 a*	1.73 a	4 a	5.85 a	9.97 a	13.03 a	0.75 a*	2.76 a	5.96 a	8.49 a	14.32 a	18.81 a
	24		0.38 b	1.94 a	3.17 a	5.82 a			0.88 a	3.26 a	5.13 a	9.3 a	12.36 a		1.9 a	5.11 a	7.65 a	13.51 a	17.96 a
16	12	0.07 b*	1.11 a	2.52 a	3.73 a	6.32 a		0.4 a*	1.77 a	4.03 a	5.88 a	10 a	13.06 a	0.79 a*	2.73 a	5.78 a	8.23 a	13.86 a	18.3 a
	16		0.65 b	2.15 a	3.38 a	6.01 a			1.21 a	3.55 a	5.41 a	9.56 a	12.62 a	0.06 b*	2.18 a	5.25 a	7.7 a	13.35 a	17.76 a
	24			1.42 c	2.67 b	5.37 a			0.1 c	2.57 b	4.46 a	8.69 a	11.75 a		1.08 c	4.18 a	6.65 a	12.33 a	16.68 a

25 psf Lateral Load

Wall Height (ft)	Spacing (in.) o.c.	800S250-(mils)					800S300-(mils)					800S350-(mils)				
		33 ksi		50 ksi			33 ksi		50 ksi			33 ksi		50 ksi		
		43	54	68	97	118	43	54	68	97	118	43	54	68	97	118
8	12	4.52 a	7.78 a	11.36 a	19.14 a	25 a		8.11 a	11.64 a	20.9 a	27.36 a	10.55 a	15.34 a	25.42 a	33.86 a	
	16	4.36 a	7.63 a	11.21 a	18.97 a	24.82 a		7.96 a	11.49 a	20.73 a	27.18 a	10.39 a	15.18 a	25.24 a	33.67 a	
	24	4.05 a	7.33 a	10.9 a	18.63 a	24.46 a		7.65 a	11.18 a	20.38 a	26.82 a	10.06 a	14.85 a	24.87 a	33.28 a	
9	12	4.38 a	7.63 a	11.2 a	18.93 a	24.72 a		7.95 a	11.46 a	20.62 a	27.04 a	10.34 a	15.11 a	25.14 a	33.48 a	
	16	4.19 a	7.44 a	11.01 a	18.71 a	24.49 a		7.75 a	11.26 a	20.4 a	26.81 a	10.14 a	14.91 a	24.91 a	33.23 a	
	24	3.79 a	7.07 a	10.62 a	18.28 a	24.04 a		7.36 a	10.88 a	19.96 a	26.35 a	9.74 a	14.49 a	24.45 a	32.75 a	
10	12	4.23 a	7.45 a	11.02 a	18.69 a	24.38 a		7.76 a	11.25 a	20.29 a	26.65 a	10.12 a	14.85 a	24.78 a	33.03 a	
	16	3.99 a	7.23 a	10.78 a	18.42 a	24.11 a		7.52 a	11.01 a	20.02 a	26.37 a	9.87 a	14.6 a	24.5 a	32.74 a	
	24	3.5 a	6.77 a	10.3 a	17.89 a	23.55 a		7.05 a	10.54 a	19.49 a	25.81 a	9.37 a	14.1 a	23.93 a	32.15 a	
12	12	3.87 a	7.05 a	10.57 a	18.09 a	23.53 a		7.32 a	10.74 a	19.47 a	25.69 a	9.57 a	14.23 a	23.82 a	31.99 a	
	16	3.52 a	6.72 a	10.23 a	17.71 a	23.14 a		6.98 a	10.4 a	19.09 a	25.3 a	9.23 a	13.87 a	23.43 a	31.58 a	
	24	2.83 a	6.07 a	9.55 a	16.96 a	22.35 a		6.31 a	9.74 a	18.34 a	24.51 a	8.53 a	13.16 a	22.63 a	30.74 a	
14	12	3.44 a	6.54 a	9.93 a	17.15 a	22.4 a		6.78 a	10.11 a	18.44 a	24.49 a	8.94 a	13.47 a	22.69 a	30.45 a	
	16	2.98 a	6.11 a	9.48 a	16.65 a	21.88 a		6.34 a	9.67 a	17.95 a	23.97 a	8.47 a	13 a	22.16 a	29.91 a	
	24	2.05 a	5.25 a	8.58 a	15.66 a	20.85 a		5.44 a	8.79 a	16.96 a	22.93 a	7.55 a	12.05 a	21.11 a	28.81 a	
16	12	2.96 a	5.96 a	9.18 a	15.99 a	21 a		6.17 a	9.39 a	17.24 a	23.07 a	8.22 a	12.6 a	21.42 a	28.5 a	
	16	2.37 a	5.41 a	8.61 a	15.37 a	20.35 a		5.61 a	8.83 a	16.62 a	22.42 a	7.63 a	12 a	20.76 a	27.82 a	
	24	1.18 b	4.32 a	7.47 a	14.12 a	19.06 a		4.47 a	7.72 a	15.38 a	21.12 a	6.47 a	10.81 a	19.43 a	26.47 a	

See Combined Axial and Lateral Load Table Notes.

Combined Axial and Lateral Load Tables

30 psf Lateral Load

Wall Height (ft)	Spacing (in.) o.c.	362S137-(mils)				362S162-(mils)					362S200-(mils)					362S250-(mils)				
		33 ksi		50 ksi		33 ksi		50 ksi			33 ksi		50 ksi			33 ksi	50 ksi			
		33	43	54	68	33	43	54	68	97	33	43	54	68	97	43	54	68	97	
8	12	0.63 b	1.25 a	2.45 a	3.47 a	0.96 a	1.66 a	3.25 a	4.45 a	6.82 a	1.27 a	2.3 a	4.22 a	7.01 a	8.5 a	2.68 a	4.83 a	6.64 a	9.76 a	
	16	0.31 c	0.92 b	2.18 a	3.24 a	0.6 b	1.31 a	2.96 a	4.19 a	6.55 a	0.87 b	1.92 a	3.88 a	6.62 a	8.22 a	2.26 a	4.47 a	6.29 a	9.43 a	
	24		0.25 d	1.65 c	2.77 b		0.63 c	2.38 b	3.67 a	6.02 a	0.08 d	1.15 b	3.22 a	5.84 a	7.66 a	1.43 b	3.75 a	5.58 a	8.78 a	
9	12	0.36 c	0.96 b	2.13 a	3.12 a	0.65 c	1.33 a	2.86 a	4 a	6.19 a	0.93 b	1.92 a	3.72 a	6.32 a	7.72 a	2.28 a	4.35 a	5.95 a	8.87 a	
	16		0.55 d	1.81 c	2.84 b	0.21 d	0.91 c	2.51 b	3.69 a	5.87 a	0.44 c	1.45 b	3.32 a	5.85 a	7.39 a	1.77 a	3.91 a	5.53 a	8.49 a	
	24			1.17 d	2.29 d		0.07 d	1.82 d	3.06 c	5.24 a		0.51 d	2.53 c	4.92 b	6.73 a	0.75 c	3.04 b	4.7 a	7.72 a	
10	12	0.07 e	0.65 d	1.79 c	2.74 b	0.33 d	0.93 c	2.45 b	3.52 a	5.51 a	0.56 c	1.52 b	3.21 a	5.55 a	6.89 a	1.86 a	3.82 a	5.24 a	7.95 a	
	16		0.16 e	1.42 d	2.42 c		0.47 d	2.05 c	3.16 b	5.15 a		0.96 d	2.75 c	5.02 b	6.52 a	1.25 c	3.31 b	4.76 a	7.51 a	
	24			0.68 e	1.77 e			1.24 e	2.44 d	4.44 c			1.84 d	3.96 d	5.77 b	0.03 d	2.29 d	3.81 c	6.64 a	
12	12			1.13 e	1.98 d		0.32 e	1.61 d	2.54 d	4.14 b		0.7 d	2.17 d	4 c	5.23 a	0.94 d	2.63 c	3.82 b	6.09 a	
	16			0.66 e	1.58 e			1.12 e	2.11 e	3.72 d			1.62 e	3.37 d	4.79 c	0.16 e	2.02 d	3.25 c	5.56 b	
	24				0.79 f			0.14 f	1.24 f	2.87 e			0.53 f	2.11 e	3.9 d		0.79 e	2.11 e	4.52 d	
14	12			0.53 f	1.3 e			0.9 f	1.71 e	3 d			1.29 e	2.7 e	3.86 d	0.08 e	1.61 e	2.63 d	4.51 c	
	16				0.84 f			0.35 f	1.22 f	2.53 e			0.68 f	2 e	3.37 e		0.93 e	1.99 e	3.93 d	
	24								0.25 f	1.59 f				0.6 f	2.39 f		-0.44 f	0.72 f	2.77 e	
16	12			0.03 f	0.73 f			0.32 f	1.04 f	2.09 e			0.6 f	1.69 f	2.79 e		0.81 f	1.68 e	3.27 d	
	16				0.24 f				0.52 f	1.59 f				0.94 f	2.27 f		0.07 f	1 f	2.65 e	
	24								0.59 f					1.22 f					1.4 f	

30 psf Lateral Load

Wall Height (ft)	Spacing (in.) o.c.	362S300-(mils)			600S137-(mils)						600S162-(mils)						600S200-(mils)	
		50 ksi			33 ksi		50 ksi				33 ksi		50 ksi				33 ksi	
		54	68	97	33	43	54	68	97	33	43	54	68	97	118	33	43	
8	12	4.9 a	7.1 a	10.99 a	1.26 a	2.01 a	3.39 a	4.63 a	7.16 a	1.9 a	2.89 a	5.1 a	6.95 a	10.86 a	13.69 a	2.27 a	3.67 a	
	16	4.55 a	6.74 a	10.66 a	1.05 a	1.81 a	3.23 a	4.47 a	7.02 a	1.68 a	2.68 a	4.9 a	6.76 a	10.67 a	13.49 a	2.03 a	3.42 a	
	24	3.84 a	6.02 a	10 a	0.64 a	1.41 a	2.9 a	4.15 a	6.73 a	1.25 a	2.27 a	4.5 a	6.39 a	10.28 a	13.09 a	1.56 a	2.93 a	
9	12	4.42 a	6.43 a	10.16 a	1.09 a	1.85 a	3.26 a	4.5 a	7.04 a	1.72 a	2.72 a	4.94 a	6.8 a	10.71 a	13.54 a	2.07 a	3.45 a	
	16	3.99 a	6 a	9.77 a	0.83 a	1.6 a	3.05 a	4.3 a	6.86 a	1.45 a	2.46 a	4.69 a	6.56 a	10.46 a	13.28 a	1.77 a	3.14 a	
	24	3.14 b	5.13 a	8.97 a	0.31 a	1.09 a	2.64 a	3.89 a	6.5 a	0.9 a	1.94 a	4.19 a	6.09 a	9.97 a	12.78 a	1.17 a	2.52 a	
10	12	3.91 a	5.74 a	9.15 a	0.91 a	1.67 a	3.12 a	4.36 a	6.92 a	1.52 a	2.52 a	4.75 a	6.63 a	10.53 a	13.36 a	1.84 a	3.19 a	
	16	3.41 a	5.24 a	8.7 a	0.59 a	1.36 a	2.86 a	4.11 a	6.69 a	1.18 a	2.2 a	4.44 a	6.34 a	10.23 a	13.04 a	1.48 a	2.81 a	
	24	2.41 c	4.24 b	7.79 a		0.74 a	2.35 a	3.61 a	6.24 a	0.52 b	1.56 a	3.82 a	5.75 a	9.62 a	12.42 a	0.74 a	2.06 a	
12	12	2.92 b	4.38 a	7.09 a	0.48 b	1.26 a	2.78 a	4.03 a	6.62 a	1.05 a	2.05 a	4.21 a	6.13 a	10.13 a	12.94 a	1.33 a	2.61 a	
	16	2.27 d	3.76 c	6.55 a	0.02 c	0.81 b	2.41 a	3.67 a	6.29 a	0.58 c	1.6 a	3.78 a	5.71 a	9.69 a	12.49 a	0.81 b	2.09 a	
	24	0.97 e	2.52 d	5.47 c			1.68 c	2.95 b	5.64 a		0.7 c	2.92 b	4.88 a	8.82 a	11.59 a		1.03 c	
14	12	1.9 d	3.09 d	5.34 b		0.78 c	2.38 b	3.64 a	6.27 a	0.53 c	1.51 b	3.57 a	5.41 a	9.35 a	12.46 a	0.75 c	1.96 a	
	16	1.14 e	2.39 e	4.73 d		0.17 d	1.89 c	3.15 b	5.82 a		0.92 d	3.01 c	4.87 a	8.77 a	11.84 a	0.07 d	1.27 c	
	24		0.98 f	3.52 e			0.89 e	2.17 d	4.94 c			1.89 d	3.79 c	7.62 b	10.62 a			
16	12	1 e	2.02 e	3.95 d		0.21 d	1.93 d	3.19 c	5.86 a		0.92 d	2.85 c	4.58 b	8.19 a	11 a	0.12 d	1.25 c	
	16	0.18 f	1.26 f	3.29 e			1.28 e	2.55 d	5.28 c		0.18 e	2.17 d	3.92 c	7.49 b	10.26 a		0.4 d	
	24			1.99 f				1.27 e	4.13 d			0.81 e	2.61 e	6.09 d	8.78 c			

30 psf Lateral Load

Wall Height (ft)	Spacing (in.) o.c.	600S200-(mils)				600S250-(mils)				600S300-(mils)				600S350-(mils)				
		50 ksi				33 ksi	50 ksi			50 ksi				50 ksi				
		54	68	97	118	43	54	68	97	118	54	68	97	118	54	68	97	118
8	12	6.76 a	9.18 a	14.66 a	18.94 a	4.01 a	7.01 a	10.28 a	17.21 a	22.07 a	7.31 a	10.48 a	18.53 a	24.18 a	9.58 a	14.04 a	23.11 a	30.65 a
	16	6.52 a	8.94 a	14.43 a	18.69 a	3.76 a	6.77 a	10.02 a	16.93 a	21.79 a	7.07 a	10.22 a	18.25 a	23.89 a	9.33 a	13.77 a	22.81 a	30.34 a
	24	6.04 a	8.46 a	13.97 a	18.21 a	3.25 a	6.3 a	9.51 a	16.37 a	21.21 a	6.6 a	9.72 a	17.69 a	23.32 a	8.83 a	13.23 a	22.22 a	29.73 a
9	12	6.48 a	8.87 a	14.29 a	18.5 a	3.78 a	6.74 a	9.94 a	16.71 a	21.49 a	7.04 a	10.14 a	18 a	23.57 a	9.24 a	13.63 a	22.51 a	29.75 a
	16	6.19 a	8.58 a	14.01 a	18.2 a	3.46 a	6.45 a	9.61 a	16.36 a	21.13 a	6.74 a	9.82 a	17.66 a	23.21 a	8.93 a	13.29 a	22.14 a	29.37 a
	24	5.59 a	7.98 a	13.43 a	17.59 a	2.82 a	5.86 a	8.97 a	15.67 a	20.41 a	6.15 a	9.19 a	16.96 a	22.49 a	8.3 a	12.61 a	21.4 a	28.61 a
10	12	6.17 a	8.52 a	13.86 a	17.98 a	3.52 a	6.44 a	9.55 a	16.14 a	20.81 a	6.73 a	9.76 a	17.4 a	22.88 a	8.87 a	13.16 a	21.85 a	28.75 a
	16	5.81 a	8.16 a	13.51 a	17.61 a	3.13 a	6.08 a	9.16 a	15.72 a	20.38 a	6.37 a	9.38 a	16.99 a	22.45 a	8.48 a	12.75 a	21.4 a	28.29 a
	24	5.09 a	7.44 a	12.82 a	16.88 a	2.34 a	5.37 a	8.38 a	14.88 a	19.51 a	5.65 a	8.61 a	16.15 a	21.58 a	7.72 a	11.93 a	20.5 a	27.38 a
12	12	5.44 a	7.69 a	12.81 a	16.69 a	2.93 a	5.75 a	8.66 a	14.79 a	19.18 a	6.02 a	8.94 a	16.02 a	21.3 a	8.01 a	12.1 a	20.37 a	26.46 a
	16	4.95 a	7.2 a	12.33 a	16.19 a	2.38 a	5.25 a	8.12 a	14.22 a	18.59 a	5.52 a	8.41 a	15.45 a	20.7 a	7.49 a	11.53 a	19.75 a	25.84 a
	24	3.95 b	6.2 a	11.37 a	15.18 a	1.28 b	4.26 a	7.04 a	13.06 a	17.41 a	4.52 a	7.34 a	14.31 a	19.5 a	6.43 a	10.4 a	18.51 a	24.6 a
14	12	4.6 a	6.71 a	11.51 a	15.09 a	2.26 a	4.99 a	7.64 a	13.21 a	17.26 a	5.22 a	8 a	14.46 a	19.55 a	7.05 a	10.89 a	18.53 a	23.88 a
	16	3.97 b	6.08 a	10.9 a	14.45 a	1.53 b	4.34 a	6.95 a	12.48 a	16.51 a	4.57 a	7.31 a	13.72 a	18.78 a	6.37 a	10.16 a	17.74 a	23.1 a
	24	2.7 d	4.8 c	9.68 a	13.17 a	0.08 d	3.05 c	5.55 b	11.02 a	15.01 a	3.27 c	5.92 a	12.26 a	17.24 a	5.02 b	8.7 a	16.15 a	21.53 a
16	12	3.7 b	5.64 a	10.06 a	13.27 a	1.53 c	4.2 b	6.57 a	11.49 a	15.15 a	4.35 a	6.99 a	12.8 a	17.29 a	6.03 a	9.59 a	16.27 a	21.14 a
	16	2.94 d	4.87 c	9.32 a	12.51 a	0.62 d	3.39 c	5.72 b	10.62 a	14.26 a	3.56 c	6.12 a	11.91 a	16.36 a	5.2 b	8.7 a	15.32 a	20.21 a
	24	1.41 e	3.35 d	7.86 c	10.98 b		1.78 e	4.01 d	8.87 c	12.46 b	1.96 d	4.4 c	10.14 b	14.52 a	3.54 d	6.9 c	13.43 a	18.34 a

See Combined Axial and Lateral Load Table Notes.

Combined Axial and Lateral Load Tables

30 psf Lateral Load																					
Wall Height (ft)	Spacing (in.) o.c.	800S137-(mils)						800S162-(mils)						800S200-(mils)							
		33 ksi			50 ksi			33 ksi			50 ksi			33 ksi			50 ksi				
		33	43		54	68	97	33	43		54	68	97	118	33	43		54	68	97	118
8	12	1.27 a*	2.08 a		3.28 a	4.47 a	6.99 a	1.86 a*	2.94 a		5.06 a	6.88 a	10.92 a	13.98 a	2.39 a*	4.06 a		7.32 a	9.85 a	15.56 a	20.02 a
	16	1.1 a*	1.94 a		3.17 a	4.36 a	6.9 a	1.65 a*	2.77 a		4.91 a	6.73 a	10.79 a	13.85 a	2.16 a*	3.88 a		7.15 a	9.69 a	15.4 a	19.85 a
	24	0.76 a*	1.67 a		2.96 a	4.15 a	6.7 a	1.23 a*	2.44 a		4.62 a	6.45 a	10.53 a	13.59 a	1.71 a*	3.54 a		6.81 a	9.35 a	15.08 a	19.51 a
9	12	1.14 a*	1.97 a		3.2 a	4.38 a	6.91 a	1.69 a*	2.8 a		4.94 a	6.76 a	10.81 a	13.88 a	2.21 a*	3.92 a		7.19 a	9.72 a	15.43 a	19.88 a
	16	0.92 a*	1.8 a		3.06 a	4.25 a	6.79 a	1.43 a*	2.59 a		4.76 a	6.58 a	10.65 a	13.71 a	1.93 a*	3.7 a		6.97 a	9.51 a	15.23 a	19.67 a
	24	0.48 a*	1.45 a		2.78 a	3.98 a	6.55 a	0.9 a*	2.17 a		4.39 a	6.22 a	10.32 a	13.38 a	1.35 a*	3.26 a		6.54 a	9.09 a	14.82 a	19.25 a
10	12	0.98 a*	1.85 a		3.1 a	4.29 a	6.83 a	1.51 a*	2.66 a		4.81 a	6.64 a	10.7 a	13.76 a	2.01 a*	3.76 a		7.04 a	9.57 a	15.29 a	19.73 a
	16	0.72 a*	1.63 a		2.93 a	4.12 a	6.68 a	1.18 a*	2.39 a		4.58 a	6.41 a	10.49 a	13.55 a	1.66 a*	3.49 a		6.77 a	9.31 a	15.04 a	19.47 a
	24	0.18 a*	1.2 a		2.59 a	3.79 a	6.38 a	0.53 a*	1.87 a		4.12 a	5.97 a	10.08 a	13.14 a	0.95 a*	2.96 a		6.24 a	8.79 a	14.54 a	18.95 a
12	12	0.63 a*	1.56 a		2.87 a	4.07 a	6.63 a	1.08 a*	2.31 a		4.51 a	6.34 a	10.43 a	13.49 a	1.54 a*	3.4 a		6.68 a	9.23 a	14.96 a	19.39 a
	16	0.24 a*	1.25 a		2.63 a	3.83 a	6.42 a	0.61 a*	1.94 a		4.18 a	6.02 a	10.13 a	13.19 a	1.03 a*	3.01 a		6.3 a	8.85 a	14.6 a	19.01 a
	24		0.63 a		2.13 a	3.36 a	5.99 a		1.19 a		3.52 a	5.38 a	9.54 a	12.6 a	0.02 a*	2.24 a		5.54 a	8.1 a	13.88 a	18.26 a
14	12	0.21 a*	1.22 a		2.61 a	3.81 a	6.4 a	0.57 a*	1.9 a		4.15 a	6 a	10.11 a	13.17 a	0.98 a*	2.93 a		6.12 a	8.66 a	14.48 a	18.98 a
	16		0.8 a		2.27 a	3.49 a	6.11 a		1.39 a		3.7 a	5.56 a	9.7 a	12.76 a	0.3 a*	2.42 a		5.62 a	8.15 a	14 a	18.47 a
	24				1.6 b	2.84 a	5.52 a		0.37 b		2.81 a	4.69 a	8.9 a	11.96 a		1.38 a		4.61 a	7.15 a	13.03 a	17.44 a
16	12		0.84 a		2.3 a	3.52 a	6.13 a		1.44 a		3.74 a	5.6 a	9.74 a	12.8 a	0.35 a*	2.4 a		5.46 a	7.91 a	13.56 a	17.98 a
	16		0.28 c		1.86 b	3.09 a	5.75 a		0.77 b		3.16 a	5.03 a	9.21 a	12.27 a		1.74 a		4.82 a	7.28 a	12.94 a	17.33 a
	24				0.98 d	2.25 c	4.99 a				1.99 c	3.89 b	8.16 a	11.22 a		0.42 c		3.55 b	6.01 a	11.72 a	16.03 a

30 psf Lateral Load																
Wall Height (ft)	Spacing (in.) o.c.	800S250-(mils)						800S300-(mils)				800S350-(mils)				
		33 ksi 43	50 ksi					50 ksi				50 ksi				
			54	68	97	118	54	68	97	118	54	68	97	118		
8	12	4.43 a	7.69 a	11.27 a	19.04 a	24.89 a	8.02 a	11.55 a	20.8 a	27.25 a	10.45 a	15.24 a	25.31 a	33.74 a		
	16	4.24 a	7.51 a	11.09 a	18.83 a	24.68 a	7.83 a	11.37 a	20.59 a	27.03 a	10.26 a	15.05 a	25.09 a	33.51 a		
	24	3.86 a	7.16 a	10.72 a	18.42 a	24.25 a	7.46 a	11 a	20.17 a	26.6 a	9.97 a	14.65 a	24.65 a	33.05 a		
9	12	4.26 a	7.51 a	11.08 a	18.8 a	24.58 a	7.83 a	11.34 a	20.49 a	26.9 a	10.22 a	14.99 a	25 a	33.33 a		
	16	4.03 a	7.29 a	10.85 a	18.54 a	24.31 a	7.6 a	11.11 a	20.23 a	26.62 a	9.98 a	14.74 a	24.73 a	33.04 a		
	24	3.55 a	6.85 a	10.38 a	18.02 a	23.77 a	7.13 a	10.65 a	19.7 a	26.08 a	9.49 a	14.25 a	24.17 a	32.46 a		
10	12	4.08 a	7.32 a	10.87 a	18.53 a	24.22 a	7.62 a	11.11 a	20.13 a	26.48 a	9.97 a	14.7 a	24.61 a	32.86 a		
	16	3.79 a	7.04 a	10.59 a	18.21 a	23.88 a	7.33 a	10.82 a	19.81 a	26.15 a	9.67 a	14.4 a	24.27 a	32.5 a		
	24	3.21 a	6.5 a	10.01 a	17.57 a	23.22 a	6.76 a	10.26 a	19.17 a	25.48 a	9.07 a	13.79 a	23.59 a	31.8 a		
12	12	3.66 a	6.85 a	10.36 a	17.86 a	23.3 a	7.12 a	10.54 a	19.24 a	25.46 a	9.37 a	14.02 a	23.58 a	31.74 a		
	16	3.25 a	6.46 a	9.96 a	17.41 a	22.82 a	6.71 a	10.14 a	18.79 a	24.99 a	8.95 a	13.59 a	23.11 a	31.24 a		
	24	2.42 a	5.69 a	9.14 a	16.51 a	21.88 a	5.9 a	9.34 a	17.89 a	24.04 a	8.11 a	12.73 a	22.15 a	30.24 a		
14	12	3.17 a	6.28 a	9.66 a	16.85 a	22.09 a	6.52 a	9.85 a	18.14 a	24.17 a	8.66 a	13.19 a	22.37 a	30.13 a		
	16	2.61 a	5.77 a	9.12 a	16.25 a	21.47 a	5.98 a	9.32 a	17.55 a	23.55 a	8.1 a	12.62 a	21.74 a	29.47 a		
	24	1.5 a	4.74 a	8.04 a	15.06 a	20.23 a	4.9 a	8.26 a	16.36 a	22.3 a	7 a	11.49 a	20.48 a	28.16 a		
16	12	2.6 a	5.63 a	8.83 a	15.62 a	20.61 a	5.83 a	9.05 a	16.86 a	22.68 a	7.87 a	12.24 a	21.02 a	28.1 a		
	16	1.89 a	4.98 a	8.15 a	14.87 a	19.84 a	5.15 a	8.38 a	16.12 a	21.9 a	7.17 a	11.52 a	20.23 a	27.28 a		
	24	0.47 c	3.67 b	6.79 a	13.38 a	18.28 a	3.79 a	7.05 a	14.63 a	20.34 a	5.77 a	10.09 a	18.64 a	25.65 a		

See Combined Axial and Lateral Load Table Notes.

Combined Axial and Lateral Load Tables

35 psf Lateral Load

Wall Height (ft)	Spacing (in.) o.c.	362S137-(mils)				362S162-(mils)					362S200-(mils)					362S250-(mils)			
		33 ksi		50 ksi		33 ksi		50 ksi			33 ksi		50 ksi			33 ksi		50 ksi	
		33	43	54	68	33	43	54	68	97	33	43	54	68	97	43	54	68	97
8	12	0.47 b	1.08 a	2.32 a	3.35 a	0.78 b	1.49 a	3.11 a	4.32 a	6.68 a	1.07 a	2.11 a	4.05 a	6.82 a	8.36 a	2.47 a	4.65 a	6.46 a	9.59 a
	16	0.09 d	0.69 c	2.01 b	3.08 a	0.36 c	1.09 b	2.77 a	4.02 a	6.37 a	0.61 b	1.66 a	3.66 a	6.36 a	8.04 a	1.99 a	4.23 a	6.05 a	9.21 a
	24			1.39 d	2.54 c		0.28 d	2.09 c	3.4 b	5.75 a		0.76 c	2.88 b	5.46 a	7.38 a	1.02 b	3.39 a	5.23 a	8.46 a
9	12	0.16 d	0.75 c	1.97 b	2.98 a	0.43 c	1.12 b	2.69 a	3.84 a	6.03 a	0.68 c	1.68 a	3.52 a	6.08 a	7.55 a	2.02 a	4.13 a	5.74 a	8.68 a
	16		0.27 d	1.6 c	2.66 b		0.63 d	2.28 c	3.48 b	5.66 a	0.11 d	1.14 c	3.06 b	5.54 a	7.17 a	1.43 b	3.62 a	5.25 a	8.23 a
	24			0.85 e	2.01 d			1.47 d	2.75 d	4.93 b		0.04 d	2.13 d	4.46 c	6.4 a	0.24 d	2.6 c	4.28 b	7.34 a
10	12		0.4 d	1.61 c	2.58 c	0.07 e	0.7 d	2.25 c	3.34 b	5.33 a	0.27 d	1.24 c	2.98 b	5.29 a	6.7 a	1.55 b	3.57 a	5 a	7.73 a
	16			1.17 d	2.2 d		0.16 e	1.78 d	2.92 c	4.91 b		0.6 d	2.45 c	4.67 b	6.27 a	0.84 d	2.97 c	4.44 b	7.22 a
	24			0.3 e	1.45 e			0.84 e	2.08 e	4.08 d			1.38 e	3.43 d	5.39 c		1.78 d	3.33 d	6.2 b
12	12			0.9 e	1.78 e			1.37 e	2.33 d	3.93 c		0.35 e	1.9 d	3.69 d	5.01 b	0.55 d	2.33 d	3.54 c	5.83 a
	16			0.35 f	1.32 e			0.8 e	1.82 e	3.43 d			1.26 e	2.95 e	4.49 d		1.61 e	2.87 d	5.22 c
	24				0.39 f				0.81 f	2.44 e				1.48 f	3.46 e		0.18 f	1.54 e	4 d
14	12			0.26 f	1.07 f			0.62 f	1.47 e	2.76 e			0.99 e	2.35 e	3.61 d		1.27 e	2.31 e	4.22 d
	16				0.54 f				0.9 f	2.21 e			0.27 f	1.54 f	3.04 e		0.47 f	1.57 e	3.54 e
	24									1.12 f					1.91 f			0.08 f	2.19 f
16	12				0.49 f			0.02 f	0.78 f	1.84 f			0.27 f	1.31 f	2.53 e		0.44 f	1.34 f	2.96 e
	16								0.17 f	1.26 f				0.44 f	1.92 f			0.54 f	2.23 f
	24									0.09					0.7 f				0.78 f

35 psf Lateral Load

Wall Height (ft)	Spacing (in.) o.c.	362S300-(mils)			600S137-(mils)					600S162-(mils)						600S200-(mils)	
		50 ksi			33 ksi		50 ksi			33 ksi		50 ksi				33 ksi	
		54	68	97	33	43	54	68	97	33	43	54	68	97	118	33	43
8	12	4.73 a	6.92 a	10.83 a	1.15 a	1.91 a	3.31 a	4.55 a	7.09 a	1.79 a	2.78 a	5 a	6.86 a	10.77 a	13.59 a	2.15 a	3.55 a
	16	4.31 a	6.5 a	10.44 a	0.91 a	1.68 a	3.12 a	4.36 a	6.92 a	1.54 a	2.54 a	4.77 a	6.64 a	10.54 a	13.36 a	1.87 a	3.26 a
	24	3.49 a	5.66 a	9.67 a	0.43 a	1.21 a	2.74 a	3.99 a	6.58 a	1.04 a	2.06 a	4.3 a	6.2 a	10.08 a	12.89 a	1.32 a	2.68 a
9	12	4.21 a	6.21 a	9.96 a	0.96 a	1.72 a	3.16 a	4.4 a	6.95 a	1.58 a	2.59 a	4.81 a	6.68 a	10.58 a	13.41 a	1.92 a	3.29 a
	16	3.71 a	5.71 a	9.5 a	0.66 a	1.43 a	2.92 a	4.16 a	6.74 a	1.27 a	2.28 a	4.52 a	6.41 a	10.3 a	13.11 a	1.57 a	2.93 a
	24	2.71 b	4.7 a	8.58 a	0.05 b	0.84 a	2.44 a	3.69 a	6.31 a	0.63 a	1.67 a	3.94 a	5.85 a	9.72 a	12.52 a	0.87 a	2.21 a
10	12	3.66 a	5.49 a	8.92 a	0.75 a	1.52 a	2.99 a	4.23 a	6.8 a	1.35 a	2.36 a	4.59 a	6.49 a	10.38 a	13.2 a	1.66 a	3 a
	16	3.08 b	4.91 a	8.39 a	0.37 a	1.15 a	2.69 a	3.94 a	6.54 a	0.96 a	1.98 a	4.23 a	6.14 a	10.03 a	12.84 a	1.23 a	2.56 a
	24	1.9 d	3.74 c	7.34 a		0.43 b	2.1 a	3.36 a	6.01 a	0.18 c	1.24 a	3.51 a	5.46 a	9.32 a	12.11 a	0.38 b	1.68 a
12	12	2.6 c	4.07 b	6.82 a	0.25 c	1.04 a	2.6 a	3.85 a	6.46 a	0.82 b	1.83 a	3.99 a	5.92 a	9.91 a	12.72 a	1.07 a	2.35 a
	16	1.84 d	3.35 d	6.19 b		0.51 c	2.17 b	3.43 a	6.08 a	0.27 c	1.3 b	3.49 a	5.43 a	9.4 a	12.19 a	0.47 c	1.73 a
	24	0.32 e	1.9 e	4.93 d			1.32 d	2.59 c	5.32 a		0.24 d	2.49 c	4.47 b	8.38 a	11.14 a		0.5 c
14	12	1.52 e	2.74 d	5.03 c		0.47 d	2.14 c	3.39 a	6.05 a	0.22 d	1.22 c	3.29 b	5.14 a	9.06 a	12.15 a	0.41 c	1.61 b
	16	0.63 e	1.92 e	4.33 d			1.55 d	2.82 c	5.53 a		0.52 d	2.64 c	4.51 b	8.39 a	11.43 a		0.81 d
	24		0.28 f	2.92 e			0.39 e	1.68 d	4.5 c			1.33 e	3.26 d	7.04 c	10 b		
16	12	0.59 f	1.64 e	3.62 d			1.6 d	2.87 c	5.57 b		0.55 d	2.51 d	4.25 c	7.84 a	10.63 a		0.83 d
	16		0.75 f	2.86 e			0.84 e	2.12 d	4.9 c			1.71 e	3.49 d	7.02 c	9.76 b		
	24			1.34 f				0.63 e	3.55 e			0.13 f	1.96 e	5.39 d	8.04 d		

35 psf Lateral Load

Wall Height (ft)	Spacing (in.) o.c.	600S200-(mils)				600S250-(mils)				600S300-(mils)				600S350-(mils)			
		50 ksi				33 ksi		50 ksi			50 ksi			50 ksi			
		54	68	97	118	43		54	68	97	118			54	68	97	118
8	12	6.64 a	9.06 a	14.55 a	18.82 a	3.88 a		6.89 a	10.15 a	17.07 a	21.93 a			7.19 a	10.35 a	18.39 a	24.04 a
	16	6.36 a	8.78 a	14.28 a	18.53 a	3.59 a		6.62 a	9.85 a	16.74 a	21.59 a			6.92 a	10.05 a	18.06 a	23.7 a
	24	5.81 a	8.22 a	13.74 a	17.97 a	2.99 a		6.07 a	9.25 a	16.09 a	20.92 a			6.36 a	9.46 a	17.42 a	23.03 a
9	12	6.33 a	8.72 a	14.15 a	18.35 a	3.62 a		6.59 a	9.78 a	16.54 a	21.31 a			6.89 a	9.98 a	17.83 a	23.39 a
	16	5.99 a	8.38 a	13.82 a	17.99 a	3.24 a		6.25 a	9.4 a	16.13 a	20.89 a			6.54 a	9.61 a	17.43 a	22.97 a
	24	5.29 a	7.68 a	13.15 a	17.29 a	2.5 a		5.57 a	8.65 a	15.32 a	20.05 a			5.85 a	8.88 a	16.62 a	22.14 a
10	12	5.99 a	8.34 a	13.69 a	17.8 a	3.32 a		6.26 a	9.36 a	15.93 a	20.59 a			6.55 a	9.57 a	17.2 a	22.66 a
	16	5.57 a	7.92 a	13.28 a	17.37 a	2.87 a		5.85 a	8.9 a	15.44 a	20.09 a			6.13 a	9.12 a	16.71 a	22.16 a
	24	4.73 a	7.08 a	12.47 a	16.51 a	1.95 a		5.01 a	7.99 a	14.46 a	19.07 a			5.29 a	8.23 a	15.73 a	21.14 a
12	12	5.2 a	7.44 a	12.57 a	16.44 a	2.66 a		5.5 a	8.39 a	14.5 a	18.89 a			5.77 a	8.67 a	15.74 a	21 a
	16	4.62 a	6.86 a	12.01 a	15.85 a	2.01 a		4.92 a	7.76 a	13.83 a	18.2 a			5.19 a	8.05 a	15.07 a	20.3 a
	24	3.46 b	5.7 a	10.89 a	14.68 a	0.73 c		3.77 b	6.5 a	12.49 a	16.81 a			4.02 a	6.81 a	13.74 a	18.91 a
14	12	4.28 a	6.39 a	11.21 a	14.77 a	1.9 a		4.66 a	7.29 a	12.85 a	16.89 a			4.89 a	7.66 a	14.09 a	19.17 a
	16	3.54 c	5.65 b	10.49 a	14.02 a	1.05 c		3.91 b	6.48 a	11.99 a	16.01 a			4.14 a	6.84 a	13.24 a	18.27 a
	24	2.07 d	4.17 d	9.07 b	12.53 a	-0.65 d		2.41 d	4.86 c	10.29 a	14.26 a			2.63 c	5.22 b	11.53 a	16.47 a
16	12	3.32 c	5.25 b	9.69 a	12.89 a	1.07 c		3.8 c	6.15 a	11.06 a	14.71 a			3.95 b	6.55 a	12.36 a	16.82 a
	16	2.43 d	4.36 c	8.83 b	12 a	0.01 d		2.86 d	5.15 c	10.03 a	13.66 a			3.02 c	5.55 b	11.32 a	15.75 a
	24	0.65 e	2.58 e	7.13 d	10.21 c	-2.11 e		0.98 e	3.16 d	7.99 c	11.57 b			1.17 e	3.54 d	9.25 c	13.6 b

See Combined Axial and Lateral Load Table Notes.

Combined Axial and Lateral Load Tables

35 psf Lateral Load

Wall Height (ft)	Spacing (in.) o.c.	800S137-(mils)						800S162-(mils)						800S200-(mils)					
		33 ksi		50 ksi				33 ksi		50 ksi				33 ksi		50 ksi			
		33	43	54	68	97	33	43	54	68	97	118	33	43	54	68	97	118	
8	12	1.19 a*	2.01 a	3.23 a	4.42 a	6.94 a	1.76 a*	2.85 a	4.98 a	6.8 a	10.85 a	13.91 a	2.28 a*	3.97 a	7.24 a	9.77 a	15.48 a	19.93 a	
	16	0.99 a*	1.85 a	3.1 a	4.29 a	6.83 a	1.51 a*	2.66 a	4.81 a	6.64 a	10.7 a	13.76 a	2.01 a*	3.77 a	7.04 a	9.57 a	15.29 a	19.74 a	
	24	0.59 a*	1.53 a	2.85 a	4.05 a	6.61 a	1.03 a*	2.27 a	4.47 a	6.31 a	10.39 a	13.45 a	1.49 a*	3.37 a	6.64 a	9.19 a	14.92 a	19.35 a	
9	12	1.03 a*	1.88 a	3.13 a	4.32 a	6.85 a	1.56 a*	2.7 a	4.85 a	6.67 a	10.73 a	13.79 a	2.07 a*	3.81 a	7.08 a	9.61 a	15.33 a	19.78 a	
	16	0.77 a*	1.68 a	2.97 a	4.16 a	6.71 a	1.25 a*	2.45 a	4.63 a	6.46 a	10.54 a	13.6 a	1.74 a*	3.55 a	6.83 a	9.37 a	15.09 a	19.53 a	
	24	0.27 a*	1.27 a	2.64 a	3.85 a	6.43 a	0.64 a*	1.96 a	4.2 a	6.04 a	10.15 a	13.21 a	1.07 a*	3.04 a	6.33 a	8.88 a	14.62 a	19.04 a	
10	12	0.85 a*	1.74 a	3.01 a	4.21 a	6.76 a	1.35 a*	2.52 a	4.7 a	6.53 a	10.6 a	13.66 a	1.83 a*	3.63 a	6.9 a	9.44 a	15.16 a	19.6 a	
	16	0.54 a*	1.49 a	2.81 a	4.01 a	6.58 a	0.97 a*	2.22 a	4.43 a	6.27 a	10.36 a	13.42 a	1.42 a*	3.32 a	6.59 a	9.14 a	14.87 a	19.3 a	
	24		0.98 a	2.41 a	3.63 a	6.23 a	0.21 a*	1.61 a	3.9 a	5.75 a	9.88 a	12.94 a	0.6 a*	2.69 a	5.98 a	8.53 a	14.29 a	18.69 a	
12	12	0.44 a*	1.41 a	2.75 a	3.95 a	6.53 a	0.84 a*	2.12 a	4.34 a	6.18 a	10.28 a	13.34 a	1.29 a*	3.21 a	6.49 a	9.04 a	14.78 a	19.2 a	
	16		1.04 a	2.46 a	3.68 a	6.28 a	0.3 a*	1.69 a	3.96 a	5.81 a	9.93 a	12.99 a	0.7 a*	2.75 a	6.05 a	8.6 a	14.36 a	18.76 a	
	24		0.32 a	1.89 a	3.12 a	5.77 a		0.81 a	3.19 a	5.06 a	9.25 a	12.3 a		1.85 a	5.16 a	7.72 a	13.52 a	17.88 a	
14	12		1.01 a	2.44 a	3.65 a	6.25 a	0.25 a*	1.65 a	3.93 a	5.78 a	9.91 a	12.97 a	0.64 a*	2.67 a	5.87 a	8.41 a	14.24 a	18.72 a	
	16		0.52 a	2.05 a	3.27 a	5.91 a		1.05 a	3.41 a	5.27 a	9.44 a	12.5 a		2.07 a	5.28 a	7.82 a	13.67 a	18.13 a	
	24			1.26 c	2.52 a	5.23 a			2.36 b	4.26 a	8.5 a	11.56 a		0.86 b	4.1 a	6.65 a	12.54 a	16.93 a	
16	12		0.56 b	2.08 a	3.31 a	5.94 a		1.1 a	3.45 a	5.31 a	9.47 a	12.53 a		2.07 a	5.14 a	7.6 a	13.25 a	17.65 a	
	16			1.57 b	2.81 a	5.5 a		0.32 c	2.77 b	4.65 a	8.86 a	11.92 a		1.3 b	4.4 a	6.86 a	12.54 a	16.89 a	
	24			0.55 d	1.83 c	4.61 b			1.4 d	3.32 c	7.64 a	10.69 a			2.91 c	5.38 b	11.1 a	15.38 a	

35 psf Lateral Load

Wall Height (ft)	Spacing (in.) o.c.	800S250-(mils)					800S300-(mils)				800S350-(mils)			
		33 ksi	50 ksi				50 ksi				50 ksi			
			43	54	68	97	118	54	68	97	118	54	68	97
8	12	4.33 a	7.6 a	11.18 a	18.93 a	24.79 a	7.93 a	11.46 a	20.69 a	27.14 a	10.35 a	15.14 a	25.2 a	33.63 a
	16	4.11 a	7.39 a	10.96 a	18.7 a	24.53 a	7.71 a	11.24 a	20.45 a	26.89 a	10.13 a	14.91 a	24.94 a	33.36 a
	24	3.68 a	6.98 a	10.53 a	18.22 a	24.03 a	7.28 a	10.82 a	19.96 a	26.38 a	9.68 a	14.46 a	24.43 a	32.82 a
9	12	4.15 a	7.4 a	10.97 a	18.67 a	24.45 a	7.71 a	11.23 a	20.36 a	26.76 a	10.1 a	14.87 a	24.86 a	33.19 a
	16	3.87 a	7.14 a	10.7 a	18.37 a	24.13 a	7.44 a	10.96 a	20.05 a	26.44 a	9.82 a	14.58 a	24.54 a	32.85 a
	24	3.32 a	6.62 a	10.15 a	17.76 a	23.49 a	6.9 a	10.42 a	19.44 a	25.8 a	9.25 a	14 a	23.89 a	32.18 a
10	12	3.94 a	7.18 a	10.73 a	18.37 a	24.05 a	7.47 a	10.96 a	19.97 a	26.32 a	9.82 a	14.55 a	24.44 a	32.68 a
	16	3.6 a	6.86 a	10.39 a	18 a	23.66 a	7.14 a	10.64 a	19.59 a	25.92 a	9.47 a	14.2 a	24.04 a	32.27 a
	24	2.92 a	6.22 a	9.72 a	17.25 a	22.88 a	6.47 a	9.98 a	18.84 a	25.14 a	8.78 a	13.49 a	23.25 a	31.44 a
12	12	3.46 a	6.66 a	10.16 a	17.64 a	23.06 a	6.91 a	10.34 a	19.02 a	25.22 a	9.16 a	13.8 a	23.35 a	31.49 a
	16	2.97 a	6.2 a	9.68 a	17.11 a	22.51 a	6.44 a	9.87 a	18.49 a	24.67 a	8.67 a	13.3 a	22.79 a	30.91 a
	24	2 a	5.3 a	8.73 a	16.05 a	21.41 a	5.5 a	8.94 a	17.44 a	23.57 a	7.69 a	12.31 a	21.67 a	29.75 a
14	12	2.89 a	6.03 a	9.39 a	16.55 a	21.78 a	6.25 a	9.58 a	17.85 a	23.86 a	8.38 a	12.9 a	22.06 a	29.8 a
	16	2.24 a	5.42 a	8.76 a	15.86 a	21.05 a	5.62 a	8.97 a	17.15 a	23.14 a	7.73 a	12.24 a	21.32 a	29.03 a
	24	0.94 b	4.22 a	7.5 a	14.46 a	19.61 a	4.37 a	7.73 a	15.77 a	21.68 a	6.44 a	10.92 a	19.85 a	27.5 a
16	12	2.25 a	5.3 a	8.49 a	15.24 a	20.22 a	5.49 a	8.72 a	16.49 a	22.29 a	7.52 a	11.88 a	20.62 a	27.69 a
	16	1.42 b	4.54 a	7.7 a	14.37 a	19.32 a	4.7 a	7.94 a	15.63 a	21.38 a	6.7 a	11.05 a	19.7 a	26.74 a
	24	-0.24 d	3.02 c	6.11 a	12.63 a	17.5 a	3.11 b	6.38 a	13.89 a	19.55 a	5.07 a	9.38 a	17.84 a	24.84 a

See Combined Axial and Lateral Load Table Notes.

Combined Axial and Lateral Load Tables

40 psf Lateral Load

Wall Height (ft)	Spacing (in.) o.c.	362S137-(mils)				362S162-(mils)					362S200-(mils)					362S250-(mils)				
		33 ksi		50 ksi		33 ksi		50 ksi			33 ksi		50 ksi			33 ksi	50 ksi			
		33	43	54	68	33	43	54	68	97	33	43	54	68	97	43	54	68	97	
8	12	0.31 c	0.92 b	2.18 a	3.24 a	0.6 b	1.31 a	2.96 a	4.19 a	6.55 a	0.87 b	1.92 a	3.88 a	6.62 a	8.22 a	2.26 a	4.47 a	6.29 a	9.43 a	
	16		0.47 c	1.83 b	2.93 a	0.12 d	0.86 c	2.57 b	3.84 a	6.2 a	0.35 c	1.4 b	3.44 a	6.1 a	7.85 a	1.71 a	3.99 a	5.81 a	9 a	
	24			1.12 d	2.31 c		-0.06 d	1.8 d	3.14 c	5.49 a		0.38 d	2.55 c	5.07 b	7.1 a	0.6 c	3.03 b	4.87 a	8.13 a	
9	12		0.55 d	1.81 c	2.84 b	0.21 d	0.91 c	2.51 b	3.69 a	5.87 a	0.44 c	1.45 b	3.32 a	5.85 a	7.39 a	1.77 a	3.91 a	5.53 a	8.49 a	
	16			1.38 d	2.47 c		0.35 d	2.05 c	3.27 b	5.45 a		0.82 c	2.8 c	5.23 a	6.95 a	1.09 c	3.33 b	4.98 a	7.98 a	
	24			0.53 e	1.73 e			1.12 e	2.43 d	4.61 c			1.74 d	4 c	6.07 b		2.16 d	3.86 c	6.95 a	
10	12		0.16 e	1.42 d	2.42 c		0.47 d	2.05 c	3.16 b	5.15 a		0.96 d	2.75 c	5.02 b	6.52 a	1.25 c	3.31 b	4.76 a	7.51 a	
	16			0.93 e	1.99 d			1.51 d	2.68 d	4.68 b		0.23 e	2.14 d	4.31 c	6.02 a	0.43 d	2.63 c	4.12 b	6.93 a	
	24				1.13 e			0.43 e	1.72 e	3.72 d			0.92 e	2.9 e	5.02 c		1.27 e	2.85 d	5.76 c	
12	12			0.66 e	1.58 e			1.12 e	2.11 e	3.72 d			1.62 e	3.37 d	4.79 c	0.16 e	2.02 d	3.25 c	5.56 b	
	16			0.04 f	1.05 f			0.47 f	1.53 e	3.15 e			0.89 e	2.53 e	4.2 d		1.2 e	2.49 d	4.87 c	
	24							0.38 f	2.02 f					0.85 f	3.02 e			0.97 e	3.48 e	
14	12				0.84 f			0.35 f	1.22 f	2.53 e			0.68 f	2 e	3.37 e		0.93 e	1.99 e	3.93 d	
	16				0.24 f				0.58 f	1.9 f				1.07 f	2.72 e		0.01 f	1.14 f	3.16 e	
	24									0.65 f					1.42 f				1.61 f	
16	12				0.24 f					1.59 f				0.94 f	2.27 f		0.07 f	1 f	2.65 e	
	16									0.92 f					1.57 f			0.08 f	1.82 f	
	24														0.18				0.16 f	

40 psf Lateral Load

Wall Height (ft)	Spacing (in.) o.c.	362S300-(mils)			600S137-(mils)						600S162-(mils)						600S200-(mils)	
		50 ksi			33 ksi		50 ksi				33 ksi		50 ksi				33 ksi	
		54	68	97	33	43	54	68	97		33	43	54	68	97	118	33	43
8	12	4.55 a	6.74 a	10.66 a	1.05 a	1.81 a	3.23 a	4.47 a	7.02 a		1.68 a	2.68 a	4.9 a	6.76 a	10.67 a	13.49 a	2.03 a	3.42 a
	16	4.08 a	6.26 a	10.22 a	0.78 a	1.54 a	3.01 a	4.25 a	6.82 a		1.4 a	2.4 a	4.64 a	6.51 a	10.41 a	13.23 a	1.72 a	3.1 a
	24	3.13 a	5.3 a	9.34 a	0.22 a	1.01 a	2.58 a	3.83 a	6.44 a		0.82 a	1.85 a	4.11 a	6.01 a	9.89 a	12.69 a	1.08 a	2.44 a
9	12	3.99 a	6 a	9.77 a	0.83 a	1.6 a	3.05 a	4.3 a	6.86 a		1.45 a	2.46 a	4.69 a	6.56 a	10.46 a	13.28 a	1.77 a	3.14 a
	16	3.42 a	5.42 a	9.24 a	0.48 a	1.26 a	2.78 a	4.03 a	6.62 a		1.08 a	2.11 a	4.35 a	6.25 a	10.13 a	12.94 a	1.37 a	2.72 a
	24	2.28 c	4.27 b	8.18 a		0.59 a	2.23 a	3.49 a	6.13 a		0.36 b	1.41 a	3.69 a	5.61 a	9.47 a	12.27 a	0.57 a	1.9 a
10	12	3.41 a	5.24 a	8.7 a	0.59 a	1.36 a	2.86 a	4.11 a	6.69 a		1.18 a	2.2 a	4.44 a	6.34 a	10.23 a	13.04 a	1.48 a	2.81 a
	16	2.74 c	4.57 a	8.09 a	0.16 b	0.95 a	2.52 a	3.77 a	6.39 a		0.74 a	1.77 a	4.03 a	5.95 a	9.82 a	12.63 a	0.99 a	2.31 a
	24	1.4 d	3.24 c	6.88 b		0.12 c	1.85 b	3.11 a	5.79 a			0.92 b	3.21 a	5.17 a	9.01 a	11.79 a	0.01 c	1.3 a
12	12	2.27 d	3.76 c	6.55 a	0.02 c	0.81 b	2.41 a	3.67 a	6.29 a		0.58 c	1.6 a	3.78 a	5.71 a	9.69 a	12.49 a	0.81 b	2.09 a
	16	1.4 e	2.93 d	5.83 c		0.22 c	1.93 b	3.19 a	5.86 a			1 c	3.2 b	5.16 a	9.11 a	11.89 a	0.13 c	1.38 b
	24	1.28 e	4.39 d				0.95 d	2.23 c	4.99 b				2.06 d	4.05 c	7.94 a	10.69 a		
14	12	1.14 e	2.39 e	4.73 d		0.17 d	1.89 c	3.15 b	5.82 a			0.92 d	3.01 c	4.87 a	8.77 a	11.84 a	0.07 d	1.27 c
	16	0.13 f	1.45 e	3.92 e			1.22 d	2.49 d	5.23 b			0.12 e	2.26 d	4.15 c	8 a	11.03 a		0.35 d
	24			2.31 f				1.19 e	4.06 d				0.77 e	2.72 d	6.46 c	9.39 c		
16	12	0.18 f	1.26 f	3.29 e			1.28 e	2.55 d	5.28 c			0.18 e	2.17 d	3.92 c	7.49 b	10.26 a		0.4 d
	16		0.25 f	2.43 e			0.41 e	1.69 e	4.51 d				1.26 e	3.05 d	6.56 c	9.27 c		
	24			0.69 f					2.97 e					1.3 e	4.69 e	7.3 d		

40 psf Lateral Load

Wall Height (ft)	Spacing (in.) o.c.	600S200-(mils)				600S250-(mils)					600S300-(mils)				600S350-(mils)			
		50 ksi				33 ksi	50 ksi				50 ksi				50 ksi			
		54	68	97	118	43	54	68	97	118	54	68	97	118	54	68	97	118
8	12	6.52 a	8.94 a	14.43 a	18.69 a	3.76 a	6.77 a	10.02 a	16.93 a	21.79 a	7.07 a	10.22 a	18.25 a	23.89 a	9.33 a	13.77 a	22.81 a	30.34 a
	16	6.2 a	8.62 a	14.13 a	18.37 a	3.42 a	6.46 a	9.68 a	16.55 a	21.4 a	6.76 a	9.89 a	17.88 a	23.51 a	8.99 a	13.41 a	22.41 a	29.93 a
	24	5.57 a	7.99 a	13.51 a	17.73 a	2.73 a	5.83 a	8.99 a	15.81 a	20.63 a	6.13 a	9.21 a	17.14 a	22.74 a	8.32 a	12.69 a	21.62 a	29.11 a
9	12	6.19 a	8.58 a	14.01 a	18.2 a	3.46 a	6.45 a	9.61 a	16.36 a	21.13 a	6.74 a	9.82 a	17.66 a	23.21 a	8.93 a	13.29 a	22.14 a	29.37 a
	16	5.79 a	8.18 a	13.62 a	17.79 a	3.03 a	6.06 a	9.18 a	15.9 a	20.65 a	6.34 a	9.4 a	17.2 a	22.73 a	8.51 a	12.84 a	21.65 a	28.87 a
	24	5 a	7.38 a	12.86 a	16.99 a	2.18 a	5.27 a	8.33 a	14.97 a	19.69 a	5.55 a	8.56 a	16.27 a	21.78 a	7.67 a	11.93 a	20.66 a	27.85 a
10	12	5.81 a	8.16 a	13.51 a	17.61 a	3.13 a	6.08 a	9.16 a	15.72 a	20.38 a	6.37 a	9.38 a	16.99 a	22.45 a	8.48 a	12.75 a	21.4 a	28.29 a
	16	5.33 a	7.68 a	13.05 a	17.12 a	2.61 a	5.61 a	8.64 a	15.16 a	19.8 a	5.89 a	8.87 a	16.43 a	21.87 a	7.98 a	12.2 a	20.8 a	27.68 a
	24	4.37 a	6.72 a	12.12 a	16.15 a	1.56 a	4.66 a	7.59 a	14.03 a	18.64 a	4.93 a	7.84 a	15.31 a	20.71 a	6.96 a	11.11 a	19.6 a	26.46 a
12	12	4.95 a	7.2 a	12.33 a	16.19 a	2.38 a	5.25 a	8.12 a	14.22 a	18.59 a	5.52 a	8.41 a	15.45 a	20.7 a	7.49 a	11.53 a	19.75 a	25.84 a
	16	4.29 a	6.53 a	11.69 a	15.52 a	1.64 a	4.59 a	7.4 a	13.45 a	17.8 a	4.85 a	7.69 a	14.69 a	19.9 a	6.78 a	10.78 a	18.92 a	25.01 a
	24	2.96 c	5.2 b	10.41 a	14.17 a	0.17 c	3.27 b	5.96 a	11.91 a	16.22 a	3.52 b	6.27 a	13.16 a	18.31 a	5.38 a	9.26 a	17.27 a	23.36 a
14	12	3.97 b	6.08 a	10.9 a	14.45 a	1.53 b	4.34 a	6.95 a	12.48 a	16.51 a	4.57 a	7.31 a	13.72 a	18.78 a	6.37 a	10.16 a	17.74 a	23.1 a
	16	3.12 c	5.23 b	10.09 a	13.6 a	0.56 d	3.48 c	6.02 a	11.5 a	15.51 a	3.71 b	6.38 a	12.75 a	17.76 a	5.47 a	9.19 a	16.68 a	22.05 a
	24	1.43 e	3.53 d	8.46 c	11.89 b		1.76 d	4.16 c	9.55 b	13.51 a	1.98 d	4.53 c	10.8 a	15.7 a	3.66 c	7.23 b	14.56 a	19.97 a
16	12	2.94 d	4.87 c	9.32 a	12.51 a	0.62 d	3.39 c	5.72 b	10.62 a	14.26 a	3.56 c	6.12 a	11.91 a	16.36 a	5.2 b	8.7 a	15.32 a	20.21 a
	16	1.92 e	3.85 d	8.35 c	11.49 b		2.32 d	4.58 c	9.45 b	13.06 a	2.49 d	4.98 c	10.73 a	15.13 a	4.09 c	7.5 b	14.06 a	18.96 a
	24		1.82 e	6.39 d	9.45 d		0.18 e	2.31 e	7.12 d	10.67 c	0.37 e	2.68 d	8.37 c	12.67 b	1.88 e	5.1 d	11.53 c	16.48 b

See Combined Axial and Lateral Load Table Notes.

Combined Axial and Lateral Load Tables

40 psf Lateral Load

Wall Height (ft)	Spacing (in.)	800S137-(mils)						800S162-(mils)						800S200-(mils)					
		33 ksi			50 ksi			33 ksi			50 ksi			33 ksi			50 ksi		
		33	43	54	68	97		33	43	54	68	97	118	33	43	54	68	97	118
8	12	1.1 a*	1.94 a	3.17 a	4.36 a	6.9 a		1.65 a*	2.77 a	4.91 a	6.73 a	10.79 a	13.85 a	2.16 a*	3.88 a	7.15 a	9.69 a	15.4 a	19.85 a
	16	0.87 a*	1.76 a	3.03 a	4.22 a	6.77 a		1.37 a*	2.55 a	4.72 a	6.54 a	10.61 a	13.67 a	1.86 a*	3.65 a	6.93 a	9.46 a	15.18 a	19.63 a
	24	0.42 a*	1.39 a	2.74 a	3.94 a	6.51 a		0.82 a*	2.1 a	4.33 a	6.17 a	10.26 a	13.32 a	1.26 a*	3.19 a	6.48 a	9.02 a	14.76 a	19.18 a
9	12	0.92 a*	1.8 a	3.06 a	4.25 a	6.79 a		1.43 a*	2.59 a	4.76 a	6.58 a	10.65 a	13.71 a	1.93 a*	3.7 a	6.97 a	9.51 a	15.23 a	19.67 a
	16	0.63 a*	1.56 a	2.87 a	4.07 a	6.63 a		1.08 a*	2.31 a	4.51 a	6.34 a	10.43 a	13.49 a	1.55 a*	3.41 a	6.69 a	9.23 a	14.96 a	19.39 a
	24	0.05 a*	1.09 a	2.5 a	3.72 a	6.31 a		0.38 a*	1.75 a	4.02 a	5.86 a	9.98 a	13.04 a	0.78 a*	2.83 a	6.12 a	8.66 a	14.42 a	18.82 a
10	12	0.72 a*	1.63 a	2.93 a	4.12 a	6.68 a		1.18 a*	2.39 a	4.58 a	6.41 a	10.49 a	13.55 a	1.66 a*	3.49 a	6.77 a	9.31 a	15.04 a	19.47 a
	16	0.36 a*	1.34 a	2.7 a	3.9 a	6.48 a		0.75 a*	2.05 a	4.28 a	6.12 a	10.22 a	13.28 a	1.19 a*	3.14 a	6.42 a	8.96 a	14.7 a	19.12 a
	24		0.77 a	2.24 a	3.46 a	6.08 a			1.35 a	3.67 a	5.53 a	9.67 a	12.73 a	0.25 a*	2.42 a	5.71 a	8.27 a	14.04 a	18.43 a
12	12	0.24 a*	1.25 a	2.63 a	3.83 a	6.42 a		0.61 a*	1.94 a	4.18 a	6.02 a	10.13 a	13.19 a	1.03 a*	3.01 a	6.3 a	8.85 a	14.6 a	19.01 a
	16		0.84 a	2.3 a	3.52 a	6.13 a			1.44 a	3.74 a	5.6 a	9.74 a	12.8 a	0.36 a*	2.5 a	5.79 a	8.35 a	14.12 a	18.51 a
	24		0.01 b	1.64 a	2.88 a	5.56 a			0.43 a	2.86 a	4.74 a	8.95 a	12.01 a		1.46 a	4.78 a	7.35 a	13.16 a	17.51 a
14	12		0.8 a	2.27 a	3.49 a	6.11 a			1.39 a	3.7 a	5.56 a	9.7 a	12.76 a	0.3 a*	2.42 a	5.62 a	8.15 a	14 a	18.47 a
	16		0.24 b	1.82 a	3.06 a	5.72 a			0.71 b	3.11 a	4.98 a	9.17 a	12.23 a		1.72 a	4.94 a	7.49 a	13.35 a	17.78 a
	24			0.93 c	2.2 b	4.94 a				1.91 c	3.82 a	8.1 a	11.15 a		0.34 c	3.59 b	6.15 a	12.05 a	16.42 a
16	12		0.28 c	1.86 b	3.09 a	5.75 a			0.77 b	3.16 a	5.03 a	9.21 a	12.27 a		1.74 a	4.82 a	7.28 a	12.94 a	17.33 a
	16			1.28 c	2.53 b	5.24 a				2.38 c	4.27 a	8.51 a	11.57 a		0.86 c	3.97 b	6.44 a	12.13 a	16.46 a
	24			0.11 e	1.4 d	4.22 c				0.82 d	2.75 c	7.11 b	10.17 a			2.27 d	4.75 c	10.49 a	14.73 a

40 psf Lateral Load

Wall Height (ft)	Spacing (in.)	800S250-(mils)					800S300-(mils)					800S350-(mils)				
		33 ksi		50 ksi			50 ksi					50 ksi				
		33	43	54	68	97	118	54	68	97	118	54	68	97	118	
8	12	4.24 a		7.51 a	11.09 a	18.83 a	24.68 a	7.83 a	11.37 a	20.59 a	27.03 a	10.26 a	15.05 a	25.09 a	33.51 a	
	16	3.99 a		7.27 a	10.84 a	18.56 a	24.39 a	7.59 a	11.12 a	20.31 a	26.74 a	10 a	14.78 a	24.8 a	33.21 a	
	24	3.49 a		6.8 a	10.34 a	18.01 a	23.81 a	7.09 a	10.63 a	19.75 a	26.16 a	9.48 a	14.26 a	24.21 a	32.59 a	
9	12	4.03 a		7.29 a	10.85 a	18.54 a	24.31 a	7.6 a	11.11 a	20.23 a	26.62 a	9.98 a	14.74 a	24.73 a	33.04 a	
	16	3.71 a		6.99 a	10.54 a	18.2 a	23.95 a	7.29 a	10.8 a	19.88 a	26.26 a	9.66 a	14.41 a	24.36 a	32.66 a	
	24	3.08 a		6.4 a	9.92 a	17.5 a	23.22 a	6.67 a	10.19 a	19.18 a	25.53 a	9.01 a	13.75 a	23.62 a	31.89 a	
10	12	3.79 a		7.04 a	10.59 a	18.21 a	23.88 a	7.33 a	10.82 a	19.81 a	26.15 a	9.67 a	14.4 a	24.27 a	32.5 a	
	16	3.4 a		6.68 a	10.2 a	17.78 a	23.44 a	6.95 a	10.45 a	19.38 a	25.7 a	9.27 a	13.99 a	23.82 a	32.03 a	
	24	2.63 a		5.95 a	9.44 a	16.94 a	22.55 a	6.19 a	9.7 a	18.52 a	24.81 a	8.48 a	13.19 a	22.91 a	31.09 a	
12	12	3.25 a		6.46 a	9.96 a	17.41 a	22.82 a	6.71 a	10.14 a	18.79 a	24.99 a	8.95 a	13.59 a	23.11 a	31.24 a	
	16	2.7 a		5.95 a	9.41 a	16.81 a	22.2 a	6.17 a	9.61 a	18.19 a	24.36 a	8.39 a	13.02 a	22.47 a	30.58 a	
	24	1.59 a		4.91 a	8.32 a	15.6 a	20.94 a	5.09 a	8.54 a	16.99 a	23.1 a	7.27 a	11.88 a	21.2 a	29.25 a	
14	12	2.61 a		5.77 a	9.12 a	16.25 a	21.47 a	5.98 a	9.32 a	17.55 a	23.55 a	8.1 a	12.62 a	21.74 a	29.47 a	
	16	1.87 a		5.08 a	8.4 a	15.46 a	20.64 a	5.26 a	8.61 a	16.76 a	22.72 a	7.37 a	11.87 a	20.9 a	28.6 a	
	24	0.39 b		3.7 a	6.96 a	13.87 a	18.98 a	3.83 a	7.2 a	15.17 a	21.06 a	5.89 a	10.35 a	19.22 a	26.85 a	
16	12	1.89 a		4.98 a	8.15 a	14.87 a	19.84 a	5.15 a	8.38 a	16.12 a	21.9 a	7.17 a	11.52 a	20.23 a	27.28 a	
	16	0.94 b		4.11 a	7.24 a	13.87 a	18.8 a	4.25 a	7.49 a	15.13 a	20.86 a	6.24 a	10.57 a	19.17 a	26.19 a	
	24			2.36 c	5.43 b	11.88 a	16.73 a	2.44 c	5.71 b	13.15 a	18.77 a	4.37 b	8.66 a	17.05 a	24.02 a	

See Combined Axial and Lateral Load Table Notes.

Combined Axial and Lateral Load Tables

50 psf Lateral Load

Wall Height (ft)	Spacing (in.) o.c.	362S137-(mils)				362S162-(mils)						362S200-(mils)						362S250-(mils)					
		33 ksi		50 ksi		33 ksi		50 ksi				33 ksi		50 ksi				33 ksi		50 ksi			
		33	43	54	68	33	43	54	68	97	33	43	54	68	97	33	43	54	68	97			
8	12		0.58 c	1.92 b	3 a	0.24 c	0.97 b	2.67 a	3.93 a	6.28 a	0.48 c	1.53 a	3.55 a	6.23 a	7.94 a	1.85 a	4.11 a	5.93 a	9.11 a				
	16	0.03 d	1.47 c	2.62 b	2.18 c			3.49 b	5.84 a	3 b			5.59 a	7.48 a	3.51 a					5.34 a	8.56 a		
	24		0.59 e	1.84 d	1.21 d			2.62 d	4.96 b	1.89 d			4.29 c	6.54 a	2.31 c					4.17 b	7.48 a		
9	12		0.14 d	1.49 d	2.56 c	0.49 d		2.16 c	3.37 b	5.56 a	0.98 c		2.93 b	5.39 a	7.06 a	1.26 b	3.47 a	5.11 a	8.1 a				
	16		0.96 e	2.1 d	1.58 d		2.85 c	5.03 b	0.2 d	2.27 d		4.61 c	6.51 a	0.41 d	2.74 c					4.42 b	7.46 a		
	24			1.17 e	0.42 e		1.81 e	3.99 d	0.94 e	3.07 d		5.41 c	1.29 d	3.02 d	6.18 b								
10	12			1.05 e	2.1 d			1.65 d	2.8 c	4.8 b	0.41 d		2.29 d	4.49 c	6.14 a	0.64 d	2.8 c	4.28 b	7.07 a				
	16		0.43 e	1.56 e	0.97 e	2.2 d	4.2 c	1.53 e	3.6 d	5.52 c		1.95 d	3.49 c	6.34 b									
	24			0.48 f		1 e	3 e	0.01 f	1.83 e	4.27 d		0.25 e	1.89 e	4.88 d									
12	12			0.2 f	1.19 e			0.63 f	1.68 e	3.29 d			1.07 e	2.74 e	4.35 d		1.4 e	2.68 d	5.04 c				
	16			0.52 f			0.95 f	2.59 e	0.16 f	1.69 e	3.61 e	0.38 f	1.73 e	4.18 d									
	24						1.17 f		2.14 f		2.44 e												
14	12			0.39 f				0.74 f	2.06 f			0.07 f	1.3 f	2.88 e		0.24 f	1.35 e	3.35 e					
	16								1.27 f			0.14 f	2.07 f		0.29 f				2.38 e				
	24												0.44 f						0.46 f				
16	12								1.09 f			0.19 f	1.74 f			0.31 f	2.02 f						
	16								0.26				0.88 f					0.99 f					
	24																						

50 psf Lateral Load

Wall Height (ft)	Spacing (in.) o.c.	362S300-(mils)			600S137-(mils)						600S162-(mils)						600S200-(mils)	
		50 ksi			33 ksi		50 ksi				33 ksi		50 ksi				33 ksi	
		54	68	97	33	43	54	68			33	43	54	68	97	118	33	43
8	12	4.55 a	6.74 a	10.66 a	1.05 a	1.81 a	3.23 a	4.47 a	7.02 a		1.68 a	2.68 a	4.9 a	6.76 a	10.67 a	13.49 a	2.03 a	3.42 a
	16	4.08 a	6.26 a	10.22 a	0.78 a	1.54 a	3.01 a	4.25 a	6.82 a		1.4 a	2.4 a	4.64 a	6.51 a	10.41 a	13.23 a	1.72 a	3.1 a
	24	3.13 a	5.3 a	9.34 a	0.22 a	1.01 a	2.58 a	3.83 a	6.44 a		0.82 a	1.85 a	4.11 a	6.01 a	9.89 a	12.69 a	1.08 a	2.44 a
9	12	3.99 a	6 a	9.77 a	0.83 a	1.6 a	3.05 a	4.3 a	6.86 a		1.45 a	2.46 a	4.69 a	6.56 a	10.46 a	13.28 a	1.77 a	3.14 a
	16	3.42 a	5.42 a	9.24 a	0.48 a	1.26 a	2.78 a	4.03 a	6.62 a		1.08 a	2.11 a	4.35 a	6.25 a	10.13 a	12.94 a	1.37 a	2.72 a
	24	2.28 c	4.27 b	8.18 a		0.59 a	2.23 a	3.49 a	6.13 a		0.36 b	1.41 a	3.69 a	5.61 a	9.47 a	12.27 a	0.57 a	1.9 a
10	12	3.41 a	5.24 a	8.7 a	0.59 a	1.36 a	2.86 a	4.11 a	6.69 a		1.18 a	2.2 a	4.44 a	6.34 a	10.23 a	13.04 a	1.48 a	2.81 a
	16	2.74 c	4.57 a	8.09 a	0.16 b	0.95 a	2.52 a	3.77 a	6.39 a		0.74 a	1.77 a	4.03 a	5.95 a	9.82 a	12.63 a	0.99 a	2.31 a
	24	1.4 d	3.24 c	6.88 b		0.12 c	1.85 b	3.11 a	5.79 a			0.92 b	3.21 a	5.17 a	9.01 a	11.79 a	0.01 c	1.3 a
12	12	2.27 d	3.76 c	6.55 a	0.02 c	0.81 b	2.41 a	3.67 a	6.29 a		0.58 c	1.6 a	3.78 a	5.71 a	9.69 a	12.49 a	0.81 b	2.09 a
	16	1.4 e	2.93 d	5.83 c		0.22 c	1.93 b	3.19 a	5.86 a			1 c	3.2 b	5.16 a	9.11 a	11.89 a	0.13 c	1.38 b
	24	1.28 e	4.39 d				0.95 d	2.23 c	4.99 b				2.06 d	4.05 c	7.94 a	10.69 a		
14	12	1.14 e	2.39 e	4.73 d		0.17 d	1.89 c	3.15 b	5.82 a			0.92 d	3.01 c	4.87 a	8.77 a	11.84 a	0.07 d	1.27 c
	16	0.13 f	1.45 e	3.92 e			1.22 d	2.49 d	5.23 b			0.12 e	2.26 d	4.15 c	8 a	11.03 a		0.35 d
	24			2.31 f				1.19 e	4.06 d				0.77 e	2.72 d	6.46 c	9.39 c		
16	12	0.18 f	1.26 f	3.29 e			1.28 e	2.55 d	5.28 c			0.18 e	2.17 d	3.92 c	7.49 b	10.26 a		0.4 d
	24		0.25 f	2.43 e			0.41 e	1.69 e	4.51 d				1.26 e	3.05 d	6.56 c	9.27 c		
				0.69 f					2.97 e					1.3 e	4.69 e	7.3 d		

50 psf Lateral Load

Wall Height (ft)	Spacing (in.) o.c.	600S200-(mils)				600S250-(mils)				600S300-(mils)				600S350-(mils)				
		50 ksi				33 ksi	50 ksi			50 ksi				50 ksi				
		54	68	97	118	43	54	68	97	118	54	68	97	118	54	68	97	118
8	12	6.28 a	8.7 a	14.2 a	18.45 a	3.5 a	6.54 a	9.76 a	16.65 a	21.5 a	6.84 a	9.97 a	17.97 a	23.6 a	9.08 a	13.5 a	22.51 a	30.03 a
	16	5.88 a	8.3 a	13.82 a	18.05 a	3.08 a	6.15 a	9.33 a	16.18 a	21.02 a	6.44 a	9.55 a	17.51 a	23.12 a	8.66 a	13.05 a	22.02 a	29.52 a
	24	5.09 a	7.51 a	13.06 a	17.24 a	2.22 a	5.36 a	8.47 a	15.25 a	20.06 a	5.65 a	8.71 a	16.58 a	22.16 a	7.82 a	12.14 a	21.03 a	28.5 a
9	12	5.89 a	8.28 a	13.72 a	17.89 a	3.14 a	6.15 a	9.29 a	16.01 a	20.77 a	6.44 a	9.51 a	17.31 a	22.85 a	8.62 a	12.95 a	21.77 a	28.99 a
	16	5.39 a	7.78 a	13.24 a	17.39 a	2.6 a	5.66 a	8.76 a	15.43 a	20.17 a	5.95 a	8.98 a	16.73 a	22.25 a	8.09 a	12.39 a	21.15 a	28.36 a
	24	4.4 a	6.79 a	12.29 a	16.38 a	1.53 a	4.69 a	7.68 a	14.27 a	18.98 a	4.96 a	7.93 a	15.58 a	21.06 a	7.05 a	11.26 a	19.91 a	27.09 a
10	12	5.45 a	7.8 a	13.17 a	17.25 a	2.74 a	5.73 a	8.77 a	15.3 a	19.94 a	6.01 a	9 a	16.57 a	22.01 a	8.1 a	12.34 a	20.95 a	27.83 a
	16	4.85 a	7.2 a	12.59 a	16.64 a	2.08 a	5.13 a	8.12 a	14.6 a	19.22 a	5.41 a	8.36 a	15.87 a	21.29 a	7.47 a	11.66 a	20.2 a	27.07 a
	24	3.65 a	5.99 a	11.43 a	15.41 a	0.78 b	3.94 a	6.81 a	13.19 a	17.77 a	4.2 a	7.08 a	14.48 a	19.84 a	6.2 a	10.29 a	18.7 a	25.54 a
12	12	4.45 a	6.7 a	11.85 a	15.69 a	1.83 a	4.76 a	7.58 a	13.64 a	18 a	5.02 a	7.87 a	14.88 a	20.1 a	6.96 a	10.96 a	19.13 a	25.22 a
	16	3.62 b	5.87 a	11.05 a	14.85 a	0.91 b	3.93 a	6.68 a	12.68 a	17.01 a	4.19 a	6.98 a	13.93 a	19.11 a	6.08 a	10.02 a	18.09 a	24.18 a
	24	1.97 d	4.21 c	9.45 a	13.17 a		2.28 c	4.88 b	10.76 a	15.04 a	2.52 c	5.2 b	12.02 a	17.11 a	4.33 b	8.13 a	16.03 a	22.12 a
14	12	3.33 c	5.44 b	10.29 a	13.81 a	0.81 c	3.7 b	6.25 a	11.75 a	15.76 a	3.92 b	6.61 a	12.99 a	18.01 a	5.7 a	9.43 a	16.94 a	22.32 a
	16	2.28 d	4.38 c	9.27 b	12.74 a		2.62 d	5.09 c	10.53 a	14.51 a	2.84 c	5.45 b	11.78 a	16.73 a	4.57 b	8.21 a	15.62 a	21.01 a
	24	0.16 e	2.26 e	7.24 d	10.61 c		0.47 e	2.77 d	8.09 c	12.01 b	0.68 e	3.14 d	9.34 b	14.16 b	2.31 d	5.77 c	12.97 b	18.41 a
16	12	2.17 d	4.11 d	8.59 b	11.74 a		2.59 d	4.87 c	9.74 b	13.36 a	2.76 d	5.26 c	11.03 a	15.44 a	4.37 c	7.8 b	14.37 a	19.27 a
	16	0.9 e	2.84 e	7.37 d	10.47 c		1.25 e	3.44 d	8.28 c	11.87 b	1.43 e	3.83 d	9.55 b	13.9 a	2.99 d	6.3 c	12.79 b	17.72 a
	24		0.29 f	4.93 e	7.91 d			0.6 e	5.36 e	8.88 d		0.96 e	6.59 d	10.83 c	0.22 e	3.31 e	9.63 d	14.61 c

See Combined Axial and Lateral Load Table Notes.

Combined Axial and Lateral Load Tables

50 psf Lateral Load

Wall Height (ft)	Spacing (in.) o.c.	800S137-(mils)						800S162-(mils)						800S200-(mils)					
		33 ksi			50 ksi			33 ksi			50 ksi			33 ksi			50 ksi		
		33	43	54	68	97		33	43	54	68	97	118	33	43	54	68	97	118
8	12	0.93 a*	1.8 a	3.06 a	4.26 a	6.8 a		1.44 a*	2.6 a	4.76 a	6.59 a	10.66 a	13.72 a	1.94 a*	3.71 a	6.98 a	9.52 a	15.24 a	19.68 a
	16	0.64 a*	1.57 a	2.88 a	4.08 a	6.64 a		1.1 a*	2.33 a	4.52 a	6.35 a	10.44 a	13.5 a	1.56 a*	3.42 a	6.7 a	9.24 a	14.97 a	19.4 a
	24	0.07 a*	1.11 a	2.52 a	3.73 a	6.32 a		0.4 a*	1.77 a	4.03 a	5.88 a	10 a	13.06 a	0.81 a*	2.85 a	6.14 a	8.68 a	14.44 a	18.84 a
9	12	0.7 a*	1.62 a	2.92 a	4.12 a	6.67 a		1.17 a*	2.38 a	4.57 a	6.4 a	10.48 a	13.54 a	1.64 a*	3.48 a	6.76 a	9.3 a	15.02 a	19.46 a
	16	0.34 a*	1.33 a	2.69 a	3.89 a	6.47 a		0.73 a*	2.03 a	4.26 a	6.1 a	10.21 a	13.27 a	1.16 a*	3.12 a	6.4 a	8.95 a	14.69 a	19.11 a
	24		0.74 a	2.23 a	3.45 a	6.07 a			1.33 a	3.64 a	5.5 a	9.65 a	12.71 a	0.21 a*	2.39 a	5.69 a	8.24 a	14.01 a	18.4 a
10	12	0.45 a*	1.41 a	2.76 a	3.96 a	6.53 a		0.86 a*	2.13 a	4.35 a	6.19 a	10.29 a	13.35 a	1.31 a*	3.23 a	6.51 a	9.05 a	14.79 a	19.21 a
	16		1.05 a	2.47 a	3.68 a	6.28 a		0.32 a*	1.7 a	3.97 a	5.82 a	9.95 a	13.01 a	0.72 a*	2.78 a	6.07 a	8.62 a	14.37 a	18.77 a
	24		0.33 a	1.9 a	3.13 a	5.79 a			0.83 a	3.21 a	5.08 a	9.26 a	12.32 a		1.88 a	5.18 a	7.75 a	13.54 a	17.9 a
12	12		0.94 a	2.38 a	3.6 a	6.2 a		0.14 a*	1.56 a	3.85 a	5.7 a	9.84 a	12.9 a	0.53 a*	2.63 a	5.92 a	8.48 a	14.24 a	18.64 a
	16		0.42 a	1.97 a	3.2 a	5.85 a			0.93 a	3.3 a	5.17 a	9.34 a	12.4 a		1.98 a	5.29 a	7.85 a	13.64 a	18.01 a
	24			1.15 b	2.41 a	5.13 a				2.21 a	4.1 a	8.36 a	11.42 a		0.69 b	4.02 a	6.6 a	12.44 a	16.75 a
14	12		0.38 b	1.94 a	3.17 a	5.82 a			0.88 a	3.26 a	5.13 a	9.3 a	12.36 a		1.9 a	5.11 a	7.65 a	13.51 a	17.96 a
	16			1.38 b	2.63 a	5.33 a			0.03 c	2.51 b	4.4 a	8.63 a	11.69 a		1.03 b	4.27 a	6.82 a	12.7 a	17.1 a
	24			0.26 d	1.55 c	4.36 b				1.02 d	2.95 c	7.29 a	10.35 a			2.58 c	5.14 b	11.08 a	15.39 a
16	12			1.42 c	2.67 b	5.37 a			0.1 c	2.57 b	4.46 a	8.69 a	11.75 a		1.08 c	4.18 a	6.65 a	12.33 a	16.68 a
	16			0.69 d	1.97 c	4.73 b				1.6 d	3.51 c	7.81 a	10.87 a			3.12 c	5.59 b	11.31 a	15.59 a
	24				0.56 e	3.46 d					1.62 d	6.06 c	9.12 b			1 d	3.48 d	9.26 b	13.43 a

50 psf Lateral Load

Wall Height (ft)	Spacing (in.) o.c.	800S250-(mils)					800S300-(mils)				800S350-(mils)			
		33 ksi		50 ksi			50 ksi				50 ksi			
		33	43	54	68	97	54	68	97	118	54	68	97	118
8	12	4.05 a	7.33 a	10.9 a	18.63 a	24.46 a	7.65 a	11.18 a	20.38 a	26.82 a	10.06 a	14.85 a	24.87 a	33.28 a
	16	3.74 a	7.04 a	10.59 a	18.28 a	24.1 a	7.34 a	10.88 a	20.03 a	26.45 a	9.74 a	14.52 a	24.5 a	32.9 a
	24	3.11 a	6.45 a	9.97 a	17.6 a	23.38 a	6.72 a	10.27 a	19.34 a	25.73 a	9.1 a	13.87 a	23.77 a	32.13 a
9	12	3.79 a	7.07 a	10.62 a	18.28 a	24.04 a	7.36 a	10.88 a	19.96 a	26.35 a	9.74 a	14.49 a	24.45 a	32.75 a
	16	3.4 a	6.7 a	10.23 a	17.85 a	23.59 a	6.98 a	10.5 a	19.53 a	25.89 a	9.33 a	14.08 a	23.99 a	32.27 a
	24	2.61 a	5.95 a	9.45 a	16.99 a	22.68 a	6.2 a	9.73 a	18.65 a	24.98 a	8.52 a	13.26 a	23.06 a	31.31 a
10	12	3.5 a	6.77 a	10.3 a	17.89 a	23.55 a	7.05 a	10.54 a	19.49 a	25.81 a	9.37 a	14.1 a	23.93 a	32.15 a
	16	3.02 a	6.31 a	9.82 a	17.36 a	22.99 a	6.57 a	10.07 a	18.95 a	25.25 a	8.88 a	13.59 a	23.36 a	31.56 a
	24	2.05 a	5.4 a	8.86 a	16.3 a	21.88 a	5.62 a	9.13 a	17.88 a	24.13 a	7.88 a	12.58 a	22.23 a	30.38 a
12	12	2.83 a	6.07 a	9.55 a	16.96 a	22.35 a	6.31 a	9.74 a	18.34 a	24.51 a	8.53 a	13.16 a	22.63 a	30.74 a
	16	2.14 a	5.43 a	8.87 a	16.2 a	21.57 a	5.63 a	9.08 a	17.59 a	23.73 a	7.83 a	12.45 a	21.83 a	29.91 a
	24	0.76 a	4.13 a	7.5 a	14.7 a	20 a	4.28 a	7.75 a	16.09 a	22.15 a	6.43 a	11.02 a	20.24 a	28.25 a
14	12	2.05 a	5.25 a	8.58 a	15.66 a	20.85 a	5.44 a	8.79 a	16.96 a	22.93 a	7.55 a	12.05 a	21.11 a	28.81 a
	16	1.13 a	4.39 a	7.68 a	14.66 a	19.81 a	4.55 a	7.91 a	15.97 a	21.89 a	6.63 a	11.11 a	20.06 a	27.72 a
	24	-0.73 c	2.67 b	5.87 a	12.67 a	17.74 a	2.76 b	6.15 a	13.99 a	19.81 a	4.78 a	9.22 a	17.96 a	25.54 a
16	12	1.18 b	4.32 a	7.47 a	14.12 a	19.06 a	4.47 a	7.72 a	15.38 a	21.12 a	6.47 a	10.81 a	19.43 a	26.47 a
	16	-0.01 c	3.23 b	6.33 a	12.88 a	17.76 a	3.34 b	6.6 a	14.14 a	19.81 a	5.3 a	9.62 a	18.11 a	25.11 a
	24	-2.38 e	1.06 d	4.06 c	10.39 b	15.17 a	1.08 d	4.38 c	11.66 a	17.21 a	2.97 c	7.23 b	15.46 a	22.39 a

See Combined Axial and Lateral Load Table Notes.

Floor and Roof Joist Span Tables

Allowable Floor and Roof Joist Uniform Load Table Notes

- All loads are computed in accordance with AISI S100-16, NAS for Design of Cold-Formed Steel Structural Members with Supplement 1.
- Total loads shown are for single span condition and are limited by allowable bending stress or allowable end shear. Live loads shown are limited by allowable bending stress, allowable end shear, or by deflection on 1/360 of span.
- Total load values in table are based on maximum allowable stress only. To limit total load deflection to 1/240 of span, multiply live load value shown in red by 1.5. Calculated value must not exceed total load value shown in black.
- For two equal continuous spans, the total load shown in these tables will not change. The live load shown may be increased by a factor of 2.4 to maintain the L/360 live load deflection limit, however live load, in any case, cannot exceed the total load shown. Combined bending and shear stresses should be investigated by the designer.
- Joists must be braced against rotation at all supports.
- End web crippling check is based on 3.5 inch end bearing. Joist flanges must be fastened to the support.
- Spans are based on continuous support of compression flange over the full length of the joist.
- End shear and web crippling capacity have not been reduced for punchouts.
- "a" indicates that web stiffeners are required at all supports.
- Allowable flexural strength values in the tables are based on the minimum of local, distortional, and lateral-torsional buckling. Distortional buckling strength is based on a $k\phi = 0$. Higher values may be obtained when sheathing is applied to the walls resulting in a higher $k\phi$ value.

Allowable Uniform Load Table (plf) - Simple Span Joists

BLACK numbers = Total Load; RED numbers = Live Load (See Note 3)

Member	Fy (ksi)	Span (ft)															
		6'-0"	7'-0"	8'-0"	9'-0"	10'-0"	11'-0"	12'-0"	13'-0"	14'-0"	15'-0"	16'-0"	17'-0"	18'-0"	19'-0"	20'-0"	24'-0"
600S162-33	33	168	124	95	75	61	50	42	36	31	27	24	21	19	17	15	13
		168	124	95	75	61	50	42	35	28	23	19	16	13	11	10	7
600S200-33	33	193	142	109	86	70	57	48	41	35	31	27	24	21	19	17	14
		193	142	109	86	70	57	48	38	31	25	21	17	14	12	11	8
600S162-43	33	252	185	142	112	91	75	63	54	46	40	35	31	28	25	23	19
		252	185	142	112	91	75	58	46	37	30	25	20	17	15	13	9
600S200-43	33	276	203	155	123	99	82	69	59	51	44	39	34	31	27	25	21
		276	203	155	123	99	82	67	52	42	34	28	23	20	17	14	11
600S250-43	33	291	214	164	129	105	87	73	62	53	47	41	36	32	29	26	22
		291	214	164	129	105	87	72	57	46	37	31	25	21	18	16	12
600S162-54	50	349	257	197	155	126	104	87	74	64	56	49	44	39	35	31	26
		349	257	197	155	124	93	72	57	45	37	30	25	21	18	16	12
600S200-54	50	394	290	222	175	142	117	99	84	72	63	55	49	44	39	36	29
		394	290	222	175	142	108	84	66	53	43	35	29	25	21	18	14
600S250-54	50	393	289	221	175	141	117	98	84	72	63	55	49	44	39	35	29
		393	289	221	175	141	117	91	72	57	47	38	32	27	23	20	15
600S162-68	50	612	450	344	272	220	182	153	130	112	98	86	76	68	61	55	46
		612	447	299	210	153	115	89	70	56	45	37	31	26	22	19	14
600S200-68	50	657	483	370	292	237	195	164	140	121	105	92	82	73	66	59	49
		657	483	344	242	176	132	102	80	64	52	43	36	30	26	22	17
600S250-68	50	697	512	392	310	251	207	174	148	128	111	98	87	77	69	63	52
		697	512	372	261	190	143	110	87	69	56	47	39	33	28	24	18
600S162-97	50	1005	738	565	447	362	299	251	214	185	161	141	125	112	100	90	75
		965	608	407	286	209	157	121	95	76	62	51	42	36	30	26	20
600S200-97	50	1127	828	634	501	406	335	282	240	207	180	158	140	125	112	101	84
		1127	712	477	335	244	183	141	111	89	72	60	50	42	36	31	23
600S250-97	50	1096	805	616	487	395	326	274	233	201	175	154	137	122	109	99	82
		1096	805	540	379	276	208	160	126	101	82	67	56	47	40	35	26
600S162-118	50	1207	a 933	714	564	457	378	317	271	233	203	179	158	141	127	114	94
		1138	a 716	480	337	246	185	142	112	90	73	60	50	42	36	31	23
600S200-118	50	1207	a 1035	a 811	641	519	429	361	307	265	231	203	180	160	144	130	107
		1207	a 842	a 564	396	289	217	167	132	105	86	71	59	50	42	36	27
600S250-118	50	1207	a 1026	785	620	503	415	349	297	256	223	196	174	155	139	126	104
		1207	a 977	655	460	335	252	194	153	122	99	82	68	57	49	42	31
800S162-33 ¹	33	126	a 108	a 95	a 84	68	56	47	40	35	30	26	23	21	19	17	14
		126	a 108	a 95	a 84	68	56	47	40	35	30	26	23	21	19	17	13
800S200-33 ¹	33	126	a 108	a 95	a 84	76	a 65	54	46	40	35	31	27	24	22	20	16
		126	a 108	a 95	a 84	76	a 65	54	46	40	35	31	27	24	22	19	15
800S162-43	33	326	240	184	145	117	97	82	70	60	52	46	41	36	33	29	24
		326	240	184	145	117	97	82	70	60	52	46	39	32	28	24	18
800S200-43	33	350	a 277	212	167	136	112	94	80	69	60	53	47	42	38	34	28
		350	a 277	212	167	136	112	94	80	69	60	53	46	39	33	28	21
800S250-43	33	350	a 291	223	176	143	118	99	84	73	63	56	49	44	40	36	29
		350	a 291	223	176	143	118	99	84	73	63	56	49	41	35	30	23
800S162-54	50	444	326	250	197	160	132	111	95	82	71	62	55	49	44	40	33
		444	326	250	197	160	132	111	95	82	71	59	49	41	35	30	23
800S200-54	50	544	399	306	242	196	162	136	116	100	87	76	68	60	54	49	40
		544	399	306	242	196	162	136	116	100	85	70	58	49	42	36	27
800S250-54	50	540	397	304	240	194	161	135	115	99	86	76	67	60	54	49	40
		540	397	304	240	194	161	135	115	99	86	75	63	53	45	39	29

See Allowable Floor Joist Span Table Notes

Floor and Roof Joist Span Tables

Allowable Uniform Load Table (plf) - Simple Span Joists

BLACK numbers = Total Load; RED numbers = Live Load (See Note 3)

Member		Fy (ksi)	Span (ft)															
			6'-0"	7'-0"	8'-0"	9'-0"	10'-0"	11'-0"	12'-0"	13'-0"	14'-0"	15'-0"	16'-0"	17'-0"	18'-0"	19'-0"	20'-0"	22'-0"
800S162-68	50	794	584	447	353	286	236	199	169	146	127	112	99	88	79	71	59	50
		794	584	447	353	286	225	173	136	109	89	73	61	51	44	37	28	22
800S200-68	50	910	668	512	404	328	271	227	194	167	146	128	113	101	91	82	68	57
		910	668	512	404	328	263	203	160	128	104	86	71	60	51	44	33	25
800S250-68	50	960	705	540	427	346	286	240	205	176	154	135	120	107	96	86	71	60
		960	705	540	427	346	282	217	171	137	111	92	76	64	55	47	35	27
800S162-97	50	1385	1017	779	615	498	412	346	295	254	222	195	172	154	138	125	103	87
		1385	1017	779	581	423	318	245	193	154	125	103	86	73	62	53	40	31
800S200-97	50	1589	1168	894	706	572	473	397	339	292	254	224	198	177	159	143	118	99
		1589	1168	894	670	489	367	283	222	178	145	119	99	84	71	61	46	35
800S250-97	50	1537	1129	865	683	553	457	384	327	282	246	216	192	171	153	138	114	96
		1537	1129	865	683	545	410	316	248	199	162	133	111	93	79	68	51	39
800S162-118	50	1868	1372	1051	830	672	556	467	398	343	299	263	233	208	186	168	139	117
		1868	1372	980	688	502	377	290	228	183	149	122	102	86	73	63	47	36
800S200-118	50	2080	1528	1170	925	749	619	520	443	382	333	293	259	231	207	187	155	130
		2080	1528	1134	797	581	436	336	264	212	172	142	118	100	85	73	55	42
800S250-118	50	1982	1456	1115	881	714	590	496	422	364	317	279	247	220	198	178	147	124
		1982	1456	1115	881	663	498	384	302	242	197	162	135	114	97	83	62	48

Member		Fy (ksi)	Span (ft)															
			11'-0"	12'-0"	13'-0"	14'-0"	15'-0"	16'-0"	17'-0"	18'-0"	19'-0"	20'-0"	22'-0"	24'-0"	26'-0"	28'-0"	30'-0"	32'-0"
1000S162-43 ¹	33	100	84	71	62	54	47	42	37	33	30	25	21	18	15	13	12	10
		100	84	71	62	54	47	42	37	33	30	25	21	18	14	12	10	8
1000S200-43 ¹	33	117	98	84	72	63	55	49	44	39	35	29	25	21	18	16	14	12
		117	98	84	72	63	55	49	44	39	35	29	25	20	16	13	11	9
1000S250-43 ¹	33	122 a	104	88	76	66	58	52	46	41	37	31	26	22	19	17	15	13
		122 a	104	88	76	66	58	52	46	41	37	31	26	22	18	14	12	10
1000S162-54	50	165	138	118	102	89	78	69	62	55	50	41	35	30	25	22	19	17
		165	138	118	102	89	78	69	62	55	50	38	29	23	18	15	12	10
1000S200-54	50	192	161	137	118	103	91	80	72	64	58	48	40	34	30	26	23	20
		192	161	137	118	103	91	80	72	64	58	43	33	26	21	17	14	12
1000S250-54	50	204	171	146	126	109	96	85	76	68	62	51	43	36	31	27	24	21
		204	171	146	126	109	96	85	76	68	62	49	37	29	24	19	16	13
1000S162-68	50	296	249	212	183	159	140	124	111	99	90	74	62	53	46	40	35	31
		296	249	212	183	148	122	102	86	73	63	47	36	29	23	19	15	13
1000S200-68	50	342	288	245	211	184	162	143	128	115	104	86	72	61	53	46	40	36
		342	288	245	206	168	138	115	97	83	71	53	41	32	26	21	17	14
1000S250-68	50	363	305	260	224	195	172	152	136	122	110	91	76	65	56	49	43	38
		363	305	260	224	187	154	129	108	92	79	59	46	36	29	23	19	16
1000S162-97	50	483	406	346	298	260	228	202	180	162	146	121	102	86	75	65	57	51
		483	406	331	265	215	177	148	125	106	91	68	53	41	33	27	22	18
1000S200-97	50	554	465	396	342	298	262	232	207	186	167	138	116	99	85	74	65	58
		554	465	378	303	246	203	169	142	121	104	78	60	47	38	31	25	21
1000S250-97	50	590	496	423	364	317	279	247	220	198	179	148	124	106	91	79	70	62
		590	496	423	340	276	228	190	160	136	116	88	67	53	42	35	28	24
1000S162-118	50	664	558	476	410	357	314	278	248	223	201	166	140	119	103	89	78	70
		661	509	401	321	261	215	179	151	128	110	83	64	50	40	33	27	22
1000S200-118	50	759	638	543	469	408	359	318	283	254	230	190	159	136	117	102	90	79
		756	582	458	367	298	246	205	173	147	126	95	73	57	46	37	31	26
1000S250-118	50	769	646	551	475	414	364	322	287	258	233	192	162	138	119	103	91	81
		769	646	517	414	336	277	231	195	166	142	107	82	65	52	42	35	29
1200S162-54 ¹	50	161	135	115	100	87	76	67	60	54	49	40	34	29	25	22	19	17
		161	135	115	100	87	76	67	60	54	49	40	34	29	25	22	19	15
1200S200-54 ¹	50	190	159	136	117	102	90	79	71	64	57	47	40	34	29	26	22	20
		190	159	136	117	102	90	79	71	64	57	47	40	34	29	26	21	18
1200S250-54 ¹	50	200 a	171	146	126	109	96	85	76	68	62	51	43	36	31	27	24	21
		200 a	171	146	126	109	96	85	76	68	62	51	43	36	31	27	22	19
1200S162-68	50	348	293	249	215	187	165	146	130	117	105	87	73	62	54	47	41	36
		348	293	249	215	187	165	146	130	111	95	71	55	43	35	28	23	19
1200S200-68	50	407	342	292	251	219	193	171	152	137	123	102	86	73	63	55	48	43
		407	342	292	251	219	193	171	147	125	107	80	62	49	39	32	26	22
1200S250-68	50	436	366	312	269	234	206	182	163	146	132	109	91	78	67	59	51	46
		436	366	312	269	234	206	182	153	130	112	84	65	51	41	33	27	23

See Allowable Floor Joist Span Table Notes

Floor and Roof Joist Span Tables

Allowable Uniform Load Table (plf) - Simple Span Joists

BLACK numbers = Total Load; RED numbers = Live Load (See Note 3)


Member	Fy (ksi)	Span (ft)																	
		11'-0"	12'-0"	13'-0"	14'-0"	15'-0"	16'-0"	17'-0"	18'-0"	19'-0"	20'-0"	22'-0"	24'-0"	26'-0"	28'-0"	30'-0"	32'-0"	34'-0"	
1200S162-97	50	581	488	416	358	312	274	243	217	195	176	145	122	104	90	78	69	61	
1200S200-97	50	581	488	416	358	312	274	228	192	163	140	105	81	64	51	42	34	29	
		671	564	481	414	361	317	281	251	225	203	168	141	120	104	90	79	70	
1200S250-97	50	671	564	481	414	361	311	259	218	186	159	120	92	72	58	47	39	32	
		719	604	515	444	387	340	301	269	241	218	180	151	129	111	97	85	75	
1200S162-118	50	719	604	515	444	387	340	284	239	203	174	131	101	79	63	52	43	35	
		765	643	548	472	411	362	320	286	256	231	191	161	137	118	103	90	80	
1200S200-118	50	765	643	548	472	408	336	280	236	201	172	129	100	78	63	51	42	35	
		881	740	631	544	474	416	369	329	295	266	220	185	158	136	118	104	92	
1200S250-118	50	881	740	631	544	463	381	318	268	228	195	147	113	89	71	58	48	40	
		947	796	678	585	509	448	396	354	317	286	237	199	169	146	127	112	99	
1200S300-118	50	947	796	678	585	509	427	356	300	255	218	164	126	99	80	65	53	44	
		993	834	711	613	534	469	416	371	333	300	248	209	178	153	134	117	104	
1200S350-118	50	993	834	711	613	534	469	392	330	281	241	181	139	110	88	71	59	49	
		1197	1006	857	739	644	566	501	447	401	362	299	252	214	185	161	141	125	
1400S200-54 ₁	50	1197	1006	857	739	644	542	452	381	324	278	209	161	126	101	82	68	56	
		171	a 157	a 145	a 133	116	102	90	81	72	65	54	45	39	33	29	25	23	
1400S250-54 ₁	50	171	a 157	a 145	a 133	116	102	90	81	72	65	54	45	39	33	29	25	23	
		171	a 157	a 145	a 134	125	110	98	87	78	71	58	49	42	36	31	28	24	
1400S300-54 ₁	50	171	a 157	a 145	a 134	125	110	98	87	78	71	58	49	42	36	31	28	24	
		171	a 157	a 145	a 134	125	a 116	102	91	82	74	61	51	44	38	33	29	26	
1400S200-68	50	171	a 157	a 145	a 134	125	a 116	102	91	82	74	61	51	44	38	33	29	26	
		430	a 390	332	287	250	219	194	173	156	140	116	98	83	72	62	55	49	
1400S250-68	50	430	a 390	332	287	250	219	194	173	156	140	113	87	69	55	45	37	31	
		430	a 394	a 359	310	270	237	210	187	168	152	125	105	90	77	67	59	53	
1400S300-68	50	430	a 394	a 359	310	270	237	210	187	168	152	118	91	72	57	47	38	32	
		430	a 394	a 364	a 325	283	249	220	196	176	159	131	110	94	81	71	62	55	
1400S200-97	50	430	a 394	a 364	a 325	283	249	220	196	176	159	124	96	75	60	49	40	34	
		778	654	557	480	419	368	326	291	261	235	195	163	139	120	105	92	81	
1400S250-97	50	778	654	557	480	419	368	326	291	261	228	171	132	104	83	67	56	46	
		840	706	602	519	452	397	352	314	282	254	210	177	150	130	113	99	88	
1400S300-97	50	840	706	602	519	452	397	352	314	282	248	186	143	113	90	73	61	50	
		883	742	632	545	475	417	370	330	296	267	221	185	158	136	119	104	92	
1400S200-118	50	883	742	632	545	475	417	370	330	296	266	200	154	121	97	79	65	54	
		1032	867	739	637	555	488	432	385	346	312	258	217	185	159	139	122	108	
1400S250-118	50	1032	867	739	637	555	488	432	385	329	282	212	163	128	103	83	69	57	
		1116	938	799	689	600	528	467	417	374	338	279	235	200	172	150	132	117	
1400S300-118	50	1116	938	799	689	600	528	467	417	365	313	235	181	143	114	93	76	64	
		1175	988	842	726	632	556	492	439	394	356	294	247	210	181	158	139	123	
1600S200-68 ₁	50	1175	988	842	726	632	556	492	439	394	338	254	196	154	123	100	83	69	
		300	a 275	a 254	a 236	220	a 203	180	160	144	130	107	90	77	66	58	51	45	
1600S250-68 ₁	50	300	a 275	a 254	a 236	220	a 203	180	160	144	130	107	90	77	66	58	50	42	
		300	a 275	a 254	a 236	220	a 206	a 194	a 175	157	142	117	98	84	72	63	55	49	
1600S300-68 ₁	50	300	a 275	a 254	a 236	220	a 206	a 194	a 183	166	150	124	104	88	76	66	58	52	
		300	a 275	a 254	a 236	220	a 206	a 194	a 183	a 166	150	124	104	88	76	66	54	45	
1600S350-68 ₁	50	300	a 275	a 254	a 236	220	a 206	a 194	a 183	a 174	a 165	a 150	a 130	111	96	83	73	65	
		300	a 275	a 254	a 236	220	a 206	a 194	a 183	a 174	a 165	a 150	a 130	111	96	79	65	54	
1600S200-97	50	874	734	626	539	470	413	366	326	293	264	218	184	156	135	117	103	91	
		874	734	626	539	470	413	366	326	293	264	218	179	141	113	92	76	63	
1600S250-97	50	951	799	681	587	511	450	398	355	319	288	238	200	170	147	128	112	100	
		951	799	681	587	511	450	398	355	319	288	238	194	153	122	100	82	68	
1600S300-97	50	1006	845	720	621	541	475	421	376	337	304	251	211	180	155	135	119	105	
		1006	845	720	621	541	475	421	376	337	304	251	208	164	131	107	88	73	
1600S350-97	50	1099	a 1007	a 883	761	663	583	516	461	413	373	308	259	221	190	166	146	129	
		1099	a 1007	a 883	761	663	583	516	461	413	373	307	237	186	149	121	100	83	
1600S200-118	50	1170	983	837	722	629	553	490	437	392	354	292	246	209	181	157	138	122	
		1170	983	837	722	629	553	490	437	392	354	290	223	176	141	114	94	79	
1600S250-118	50	1274	1071	912	787	685	602	533	476	427	385	319	268	228	197	171	151	133	
		1274	1071	912	787	685	602	533	476	427	385	319	247	195	156	127	104	87	
1600S300-118	50	1349	1134	966	833	726	638	565	504	452	408	337	283	241	208	181	159	141	
		1349	1134	966	833	726	638	565	504	452	408	337	266	209	167	136	112	94	
1600S350-118	50	1633	1372	1169	1008	878	772	684	610	547	494	408	343	292	252	220	193	171	
		1633	1372	1169	1008	878	772	684	610	547	494	396	305	240	192	156	129	107	

See Allowable Floor Joist Span Table Notes


Header Load Tables

Header Load Table Notes

1. Calculated properties are based on AISI S100-16/S1-18, North American Specification for Cold-Formed Steel Structural Members with Supplement 1.
2. Allowable deflection limit is $L/360$.
3. Allowable capacities have not been modified for wind or earthquake loading.
4. Headers are made from two "boxed" or back-to-back members.
4. Allowable moment, shear, and web crippling capacities are based on twice the capacity of a single member. The moment of inertia is based on twice the value of the single member.
5. Minimum bearing length for web crippling = 1-inch
6. Capacities are calculated for unpunched members only.
7. Members are assumed adequately braced for bending.
8. Allowable loads are for simply supported headers with uniform bending loads only.
9. "e" Web stiffeners are required at each support.



Boxed Header



Back-to-Back Header

Header Allowable Uniform Loads (lb/ft)

Section	Yield, F _y , ksi	3 (ft)	4 (ft)	5 (ft)	SPAN 6 (ft)	8 (ft)	10 (ft)	12 (ft)
550S162-33	33	931 e	698 e	535 e	371 e	209 e	124 e	72 e
550S162-43	33	2066 e	1203 e	770 e	535 e	301 e	164 e	95 e
550S162-54	33	2761 e	1553 e	994 e	690 e	388 e	202 e	117
550S162-54	50	3617 e	2034 e	1302 e	904 e	388 e	199 e	115
550S162-68	50	5032 e	2831 e	1812 e	1150 e	485 e	248 e	144
600S137-33	33	850 e	638 e	465 e	323 e	182 e	116 e	73 e
600S162-33	33	851 e	638 e	510 e	420 e	236 e	151 e	88 e
600S200-33	33	851 e	638 e	510 e	425 e	251 e	161 e	97 e
600S137-43	33	1860 e	1046 e	670 e	465 e	262 e	167 e	100 e
600S162-43	33	1887 e	1357 e	869 e	603 e	339 e	201 e	117 e
600S200-43	33	1887 e	1415 e	915 e	636 e	358 e	229 e	133 e
600S250-43	33	1887 e	1415 e	958 e	665 e	374 e	240 e	145 e
600S137-54	33	2419 e	1361 e	871 e	605 e	340 e	218 e	126
600S137-54	50	3393 e	1909 e	1222 e	848 e	410 e	210 e	121
600S162-54	33	3119 e	1754 e	1123 e	780 e	439 e	249 e	144 e
600S162-54	50	3763 e	2299 e	1472 e	1022 e	478 e	245 e	142 e
600S200-54	33	3550 e	1997 e	1278 e	887 e	499 e	289 e	167 e
600S200-54	50	3763 e	2514 e	1609 e	1117 e	536 e	274 e	159 e
600S250-54	33	3364 e	1892 e	1211 e	841 e	473 e	303 e	182 e
600S250-54	50	3763 e	2630 e	1683 e	1169 e	583 e	298 e	173 e
600S137-68	50	4540 e	2554 e	1635 e	1135 e	525 e	269 e	155
600S162-68	50	5685 e	3198 e	2046 e	1419 e	598 e	306 e	177
600S200-68	50	5906 e	3322 e	2126 e	1476 e	689 e	353 e	204 e
600S250-68	50	6089 e	3425 e	2192 e	1522 e	744 e	381 e	220 e
600S137-97	50	7480 e	4208 e	2693 e	1684 e	711	364	211
600S162-97	50	8358 e	4702 e	3009 e	1931 e	815	417	241
600S200-97	50	9517 e	5353 e	3426 e	2260 e	954 e	488	283
600S250-97	50	9174 e	5160 e	3303 e	2293 e	1080 e	553	320
600S162-118	50	10159 e	5715 e	3657 e	2275 e	960	491	284
600S200-118	50	11568 e	6507 e	4165 e	2675 e	1129	578	334
600S250-118	50	11321 e	6368 e	4076 e	2830 e	1309 e	670	388
800S137-33 ¹	33	632 e	474 e	379 e	316 e	208 e	133 e	93 e
800S162-33 ¹	33	632 e	474 e	379 e	316 e	237 e	153 e	106 e
800S200-33 ¹	33	632 e	474 e	379 e	316 e	237 e	174 e	121 e
800S137-43	33	1401 e	1051 e	841 e	641 e	361 e	231 e	160 e
800S162-43	33	1401 e	1051 e	841 e	701 e	412 e	264 e	183 e
800S200-43	33	1401 e	1051 e	841 e	701 e	526 e	339 e	236 e
800S250-43	33	1401 e	1051 e	841 e	701 e	526 e	341 e	237 e

Header Load Tables

Header Allowable Uniform Loads (lb/ft)

Section	Yield, F _y , ksi	SPAN					
		3 (ft)	4 (ft)	5 (ft)	6 (ft)	8 (ft)	10 (ft)
800S137-54	33	2788 e	1916 e	1226 e	852 e	479 e	307 e
800S137-54	50	2788 e	2091 e	1673 e	1173 e	660 e	406 e
800S162-54	33	2788 e	2091 e	1391 e	966 e	543 e	348 e
800S162-54	50	2788 e	2091 e	1673 e	1336 e	752 e	460 e
800S200-54	33	2788 e	2091 e	1673 e	1321 e	743 e	476 e
800S200-54	50	2788 e	2091 e	1673 e	1394 e	925 e	541 e
800S250-54	33	2788 e	2091 e	1673 e	1246 e	701 e	449 e
800S250-54	50	2788 e	2091 e	1673 e	1394 e	929 e	571 e
800S137-68	50	5627 e	3621 e	2318 e	1610 e	905 e	530 e
800S162-68	50	5627 e	4110 e	2631 e	1827 e	1028 e	599 e
800S200-68	50	5627 e	4220 e	3176 e	2205 e	1240 e	701 e
800S250-68	50	5627 e	4220 e	3268 e	2270 e	1277 e	751 e
800S137-97	50	10850 e	6103 e	3906 e	2712 e	1463 e	749 e
800S162-97	50	12255 e	6894 e	4412 e	3064 e	1654 e	847 e
800S200-97	50	14283 e	8034 e	5142 e	3571 e	1908 e	977 e
800S250-97	50	13603 e	7652 e	4897 e	3401 e	1913 e	1090 e
800S162-118	50	15551 e	8748 e	5598 e	3888 e	1959 e	1003 e
800S200-118	50	17437 e	9808 e	6277 e	4359 e	2268 e	1161 e
800S250-118	50	16794 e	9447 e	6046 e	4199 e	2362 e	1326 e
1000S162-43 ¹	33	1115 e	836 e	669 e	557 e	418 e	280 e
1000S200-43 ¹	33	1115 e	836 e	669 e	557 e	418 e	317 e
1000S250-43 ¹	33	1115 e	836 e	669 e	557 e	418 e	334 e
1000S162-54	33	2213 e	1660 e	1328 e	1107 e	697 e	446 e
1000S162-54	50	2213 e	1660 e	1328 e	1107 e	830 e	611 e
1000S200-54	33	2213 e	1660 e	1328 e	1107 e	806 e	516 e
1000S200-54	50	2213 e	1660 e	1328 e	1107 e	830 e	663 e
1000S250-54	33	2213 e	1660 e	1328 e	1107 e	830 e	594 e
1000S250-54	50	2213 e	1660 e	1328 e	1107 e	830 e	664 e
1000S162-68	50	4460 e	3345 e	2676 e	2230 e	1323 e	847 e
1000S200-68	50	4460 e	3345 e	2676 e	2230 e	1490 e	954 e
1000S250-68	50	4460 e	3345 e	2676 e	2230 e	1673 e	1092 e
1000S162-97	50	13149 e	8120 e	5197 e	3609 e	2030 e	1299 e
1000S200-97	50	13149 e	9298 e	5950 e	4132 e	2324 e	1488 e
1000S250-97	50	13149 e	9862 e	6709 e	4659 e	2621 e	1677 e
1000S162-118	50	19372 e	10897 e	6974 e	4843 e	2724 e	1743 e
1000S200-118	50	21652 e	12453 e	7970 e	5534 e	3113 e	1992 e
1000S250-118	50	21652 e	12938 e	8280 e	5750 e	3234 e	2070 e
1200S162-54 ¹	33	1836 e	1377 e	1102 e	918 e	689 e	454 e
1200S162-54 ¹	50	1836 e	1377 e	1102 e	918 e	689 e	551 e
1200S200-54 ¹	33	1836 e	1377 e	1102 e	918 e	689 e	524 e
1200S200-54 ¹	50	1836 e	1377 e	1102 e	918 e	689 e	551 e
1200S250-54 ¹	33	1836 e	1377 e	1102 e	918 e	689 e	534 e
1200S250-54 ¹	50	1836 e	1377 e	1102 e	918 e	689 e	551 e
1200S162-68	50	3693 e	2770 e	2216 e	1847 e	1385 e	1034 e
1200S200-68	50	3693 e	2770 e	2216 e	1847 e	1385 e	1108 e
1200S250-68	50	3693 e	2770 e	2216 e	1847 e	1385 e	1108 e
1200S162-97	50	10860 e	8145 e	6476 e	4497 e	2530 e	1619 e
1200S200-97	50	10860 e	8145 e	6516 e	5130 e	2886 e	1847 e
1200S250-97	50	10860 e	8145 e	6516 e	5430 e	3117 e	1995 e
1200S162-118	50	19976 e	12852 e	8225 e	5712 e	3213 e	2056 e
1200S200-118	50	19976 e	14591 e	9338 e	6485 e	3648 e	2335 e
1200S250-118	50	19976 e	14982 e	10438 e	7249 e	4077 e	2609 e
1200S300-118	50	19976 e	14982 e	11551 e	8022 e	4512 e	2888 e
1200S350-118	50	19976 e	14982 e	11986 e	9241 e	5198 e	3327 e
1400S200-54 ¹	33	1568 e	1176 e	941 e	784 e	588 e	470 e
1400S200-54 ¹	50	1568 e	1176 e	941 e	784 e	588 e	470 e
1400S250-54 ¹	33	1568 e	1176 e	941 e	784 e	588 e	470 e
1400S250-54 ¹	50	1568 e	1176 e	941 e	784 e	588 e	470 e
1400S300-54 ¹	33	1568 e	1176 e	941 e	784 e	588 e	470 e
1400S300-54 ¹	50	1568 e	1176 e	941 e	784 e	588 e	470 e
1400S200-68	50	3152 e	2364 e	1891 e	1576 e	1182 e	946 e
1400S250-68	50	3152 e	2364 e	1891 e	1576 e	1182 e	946 e
1400S300-68	50	3152 e	2364 e	1891 e	1576 e	1182 e	946 e
1400S200-97	50	9251 e	6938 e	5550 e	4625 e	3444 e	2204 e
1400S250-97	50	9251 e	6938 e	5550 e	4625 e	3469 e	2373 e
1400S300-97	50	9251 e	6938 e	5550 e	4625 e	3469 e	2516 e

See Header Load Table Notes

Header Load Tables

Header Allowable Uniform Loads (lb/ft)


Section	Yield, F _y , ksi	SPAN						
		3 (ft)	4 (ft)	5 (ft)	6 (ft)	8 (ft)	10 (ft)	12 (ft)
1400S200-118	50	16991 e	12743 e	10194 e	7825 e	4401 e	2817 e	1956 e
1400S250-118	50	16991 e	12743 e	10194 e	8495 e	4899 e	3135 e	2177 e
1400S300-118	50	16991 e	12743 e	10194 e	8495 e	5224 e	3344 e	2322 e
1600S200-68 ¹	50	2749 e	2062 e	1650 e	1375 e	1031 e	825 e	687 e
1600S250-68 ¹	50	2749 e	2062 e	1650 e	1375 e	1031 e	825 e	687 e
1600S300-68 ¹	50	2749 e	2062 e	1650 e	1375 e	1031 e	825 e	687 e
1600S350-68 ¹	50	2749 e	2062 e	1650 e	1375 e	1031 e	825 e	687 e
1600S200-97	50	8056 e	6042 e	4834 e	4028 e	3021 e	2417 e	1778 e
1600S250-97	50	8056 e	6042 e	4834 e	4028 e	3021 e	2417 e	1909 e
1600S300-97	50	8056 e	6042 e	4834 e	4028 e	3021 e	2417 e	2014 e
1600S350-97	50	8056 e	6042 e	4834 e	4028 e	3021 e	2417 e	2014 e
1600S200-118	50	14781 e	11086 e	8869 e	7391 e	5153 e	3298 e	2290 e
1600S250-118	50	14781 e	11086 e	8869 e	7391 e	5543 e	3660 e	2541 e
1600S300-118	50	14781 e	11086 e	8869 e	7391 e	5543 e	3895 e	2705 e
1600S350-118	50	14781 e	11086 e	8869 e	7391 e	5543 e	4434 e	3115 e

See Header Load Table Notes

Web Crippling Load Table Notes

1. All capacities listed are calculated using AISI S100-16/S1-18.
2. Web crippling capacities calculated are for studs with stiffened or partially stiffened flanges.
3. Tabulated web crippling capacities are for single members only. For multiple members, multiply the tabulated values by number of members in the assembly.
4. Listed allowable capacities are based on members 'fastened to supports', except back-to-back members under two-flange loading (condition 3 and 4) for which data for 'fastened to support' is unavailable in the AISI S100-16/S1-18 specification.
5. Listed allowable capacities are for unpunched webs. Capacity reduction for end and interior one flange loading (conditions 1 and 2) near punchouts may be required per section G6 of S100.

Web Crippling Conditions

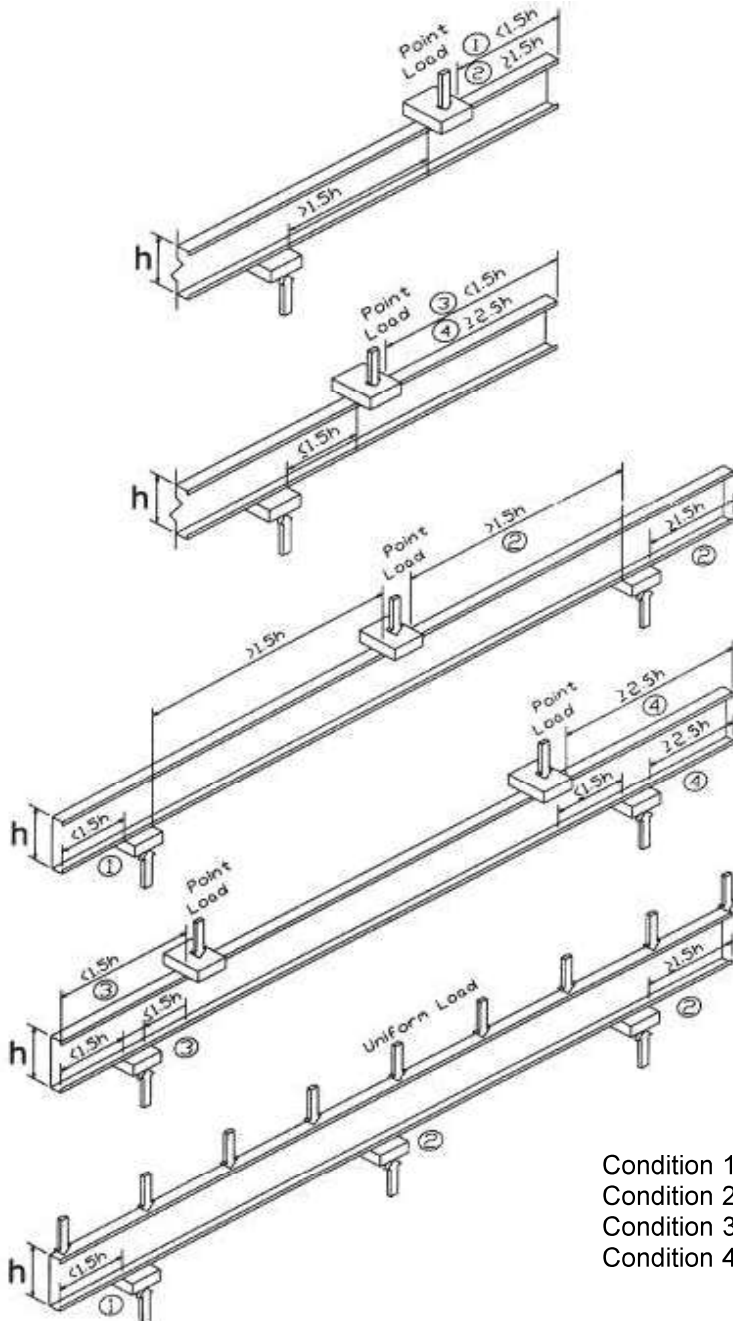

- Condition 1: End One-Flange Reaction
 Condition 2: Interior One-Flange Reaction
 Condition 3: End Two-Flange Reaction
 Condition 4: Interior Two-Flange Reaction

Web Crippling Load Tables

Allowable Web Crippling Loads (lbs) - Single Members

Member	Design Thickness	Inside Radius	Yield Str	Condition 1				Condition 2				Condition 3				Condition 4			
				1	3.5	4	6	1	3.5	4	6	1	3.5	4	6	1	3.5	4	6
162S - 18	0.0188	0.0843	33	55	90	95	112	87	125	131	151	45	64	67	76	122	161	166	187
162S - 27	0.0283	0.0796	33	122	194	205	242	218	304	317	361	111	151	157	178	290	371	383	425
162S - 30	0.0312	0.0781	33	148	233	246	290	269	373	388	442	137	185	192	217	356	452	466	516
162S - 33	0.0346	0.0764	33	180	282	297	350	336	462	481	546	170	229	237	267	441	557	574	634
162S - 43	0.0451	0.0712	33	298	459	483	566	589	793	823	929	297	390	404	452	764	946	973	1067
162S - 54	0.0566	0.0849	33	447	678	712	832	904	1196	1239	1390	471	609	629	700	1203	1466	1506	1642
162S - 54	0.0566	0.0849	50	677	1027	1079	1260	1370	1812	1877	2105	714	922	953	1061	1823	2222	2281	2487
162S - 68	0.0713	0.1069	33	672	1004	1054	1225	1386	1802	1863	2077	750	952	982	1087	1901	2282	2339	2536
162S - 68	0.0713	0.1069	50	1019	1522	1596	1856	2100	2730	2823	3148	1136	1443	1488	1646	2880	3458	3544	3842
250S - 18	0.0188	0.0843	33	52	84	89	106	85	122	128	147	37	51	54	61	109	145	150	168
250S - 27	0.0283	0.0796	33	117	186	196	231	213	298	310	354	96	130	135	153	268	343	354	393
250S - 30	0.0312	0.0781	33	141	223	235	277	264	366	381	433	119	161	167	189	330	420	433	479
250S - 33	0.0346	0.0764	33	173	271	285	336	330	453	472	535	150	201	209	235	411	519	535	591
250S - 43	0.0451	0.0712	33	287	443	466	547	580	780	810	913	267	351	364	407	720	892	918	1006
250S - 54	0.0566	0.0849	33	433	657	690	806	891	1178	1221	1369	430	556	574	639	1142	1392	1429	1558
250S - 54	0.0566	0.0849	50	656	996	1046	1222	1350	1785	1850	2075	652	842	870	968	1730	2109	2165	2361
250S - 68	0.0713	0.1069	33	654	977	1024	1191	1368	1778	1839	2050	693	880	907	1004	1815	2179	2233	2421
250S - 68	0.0713	0.1069	50	990	1480	1552	1805	2073	2694	2786	3106	1049	1333	1375	1521	2750	3302	3384	3669
350S - 18	0.0188	0.0843	33	49	80	84	100	83	119	124	143	28	40	42	48	98	130	134	151
350S - 27	0.0283	0.0796	33	112	177	187	221	209	292	304	347	81	111	115	130	247	316	327	362
350S - 30	0.0312	0.0781	33	135	214	226	266	259	359	374	425	103	139	144	163	306	389	402	445
350S - 33	0.0346	0.0764	33	166	260	274	323	324	445	463	526	131	175	182	205	384	484	499	551
350S - 43	0.0451	0.0712	33	278	428	451	528	571	768	798	900	240	315	326	365	680	842	866	949
350S - 54	0.0566	0.0849	33	420	638	670	783	879	1162	1204	1351	392	507	524	583	1086	1324	1359	1482
350S - 54	0.0566	0.0849	50	637	967	1016	1186	1331	1761	1825	2046	594	768	794	883	1645	2005	2059	2245
350S - 68	0.0713	0.1069	33	637	951	998	1160	1351	1756	1816	2025	640	813	839	928	1737	2085	2137	2317
350S - 68	0.0713	0.1069	50	965	1441	1512	1758	2047	2661	2752	3068	970	1232	1271	1406	2631	3159	3238	3510
350S - 97	0.1017	0.1525	33	1209	1760	1841	2126	2629	3328	3431	3792	1343	1663	1710	1876	3562	4184	4276	4597
350S - 97	0.1017	0.1525	50	1831	2666	2790	3221	3983	5042	5199	5745	2035	2520	2592	2842	5397	6339	6479	6966
362S - 18	0.0188	0.0843	33	49	79	84	99	82	119	124	143	27	39	40	46	97	128	133	149
362S - 27	0.0283	0.0796	33	111	177	186	220	209	291	303	346	80	108	113	127	245	313	324	359
362S - 30	0.0312	0.0781	33	135	213	224	265	258	358	373	424	101	136	141	160	304	386	398	441
362S - 33	0.0346	0.0764	33	165	259	273	322	323	444	462	525	129	173	179	202	381	480	495	547
362S - 43	0.0451	0.0712	33	277	427	449	526	570	767	796	898	236	311	322	360	675	836	860	943
362S - 54	0.0566	0.0849	33	419	636	668	780	877	1160	1202	1348	388	501	518	577	1079	1316	1351	1473
362S - 54	0.0566	0.0849	50	634	963	1012	1182	1329	1758	1822	2043	588	760	785	874	1635	1994	2047	2232
362S - 68	0.0713	0.1069	33	635	948	995	1157	1349	1754	1813	2022	635	806	831	920	1728	2074	2126	2305
362S - 68	0.0713	0.1069	50	962	1437	1507	1753	2044	2657	2748	3064	961	1221	1259	1393	2618	3143	3221	3492
362S - 97	0.1017	0.1525	33	1206	1755	1837	2120	2626	3324	3427	3787	1333	1651	1698	1862	3547	4166	4258	4578
362S - 97	0.1017	0.1525	50	1827	2659	2783	3212	3979	5036	5192	5738	2020	2501	2573	2821	5374	6313	6452	6937
400S - 27	0.0283	0.0796	33	109	174	183	217	207	289	301	344	75	102	106	120	238	305	315	349
400S - 30	0.0312	0.0781	33	133	210	221	261	257	356	370	421	95	129	134	151	296	376	388	429
400S - 33	0.0346	0.0764	33	163	256	269	317	322	442	460	522	122	164	170	192	372	469	483	534
400S - 43	0.0451	0.0712	33	274	422	444	520	567	763	792	893	227	299	309	346	662	819	843	924
400S - 54	0.0566	0.0849	33	415	629	661	772	873	1155	1197	1342	376	485	502	558	1061	1293	1328	1448
400S - 54	0.0566	0.0849	50	628	954	1002	1170	1323	1750	1813	2034	569	735	760	846	1607	1960	2012	2194
400S - 68	0.0713	0.1069	33	629	940	986	1147	1344	1746	1806	2014	617	784	809	895	1702	2044	2094	2271
400S - 68	0.0713	0.1069	50	953	1424	1494	1737	2036	2646	2737	3051	936	1188	1226	1356	2579	3097	3173	3441
400S - 97	0.1017	0.1525	33	1197	1742	1823	2105	2617	3312	3415	3774	1305	1616	1662	1823	3504	4116	4207	4523
400S - 97	0.1017	0.1525	50	1814	2640	2762	3189	3965	5018	5175	5718	1978	2449	2518	2761	5309	6236	6374	6853
550S - 27	0.0283	0.0796	33	103	164	173	205	202	282	294	336	58	79	82	93	214	274	283	314
550S - 30	0.0312	0.0781	33	126	199	210	248	251	348	362	412	76	103	107	120	268	341	351	389
550S - 33	0.0346	0.0764	33	155	243	256	302	315	432	450	511	100	134	139	157	339	428	441	487
550S - 43	0.0451	0.0712	33	262	405	426	499	556	749	778	877	195	256	265	297	614	760	782	858
550S - 54																			

Web Crippling Load Tables


Allowable Web Crippling Loads (lbs) - Back-to-Back Members

Member	Design Thickness	Inside Radius	Yield Str	Condition 1				Condition 2				Condition 3				Condition 4			
				1	3.5	4	6	1	3.5	4	6	1	3.5	4	6	1	3.5	4	6
162S - 18	0.0188	0.0843	33	124	196	207	244	156	217	226	257	76	100	103	116	153	202	209	234
162S - 27	0.0283	0.0796	33	268	413	435	510	363	489	507	572	184	236	244	270	386	494	510	566
162S - 30	0.0312	0.0781	33	321	493	518	606	443	592	614	690	227	288	298	329	478	608	628	695
162S - 33	0.0346	0.0764	33	389	593	623	729	547	724	750	842	283	357	368	406	600	757	781	862
162S - 43	0.0451	0.0712	33	638	953	1000	1163	933	1211	1252	1395	494	612	629	690	1066	1320	1358	1489
162S - 54	0.0566	0.0849	33	949	1395	1462	1692	1427	1820	1878	2081	784	956	982	1071	1696	2068	2123	2315
162S - 54	0.0566	0.0849	50	1438	2114	2215	2564	2162	2757	2846	3153	1188	1449	1488	1622	2570	3134	3217	3508
162S - 68	0.0713	0.1069	33	1418	2050	2144	2470	2188	2744	2826	3113	1250	1501	1538	1667	2703	3246	3326	3606
162S - 68	0.0713	0.1069	50	2148	3106	3248	3742	3315	4157	4282	4717	1894	2274	2330	2526	4096	4918	5040	5464
250S - 18	0.0188	0.0843	33	123	196	206	244	156	216	225	256	65	85	88	99	131	172	179	200
250S - 27	0.0283	0.0796	33	267	412	434	509	363	488	506	571	164	211	217	241	344	441	455	505
250S - 30	0.0312	0.0781	33	320	492	517	605	443	590	612	689	204	260	268	296	430	547	564	625
250S - 33	0.0346	0.0764	33	389	592	622	727	546	723	749	840	256	323	333	368	544	686	708	781
250S - 43	0.0451	0.0712	33	637	952	999	1162	932	1209	1250	1393	455	563	580	636	982	1216	1251	1371
250S - 54	0.0566	0.0849	33	947	1393	1460	1690	1425	1817	1876	2078	730	890	914	997	1579	1925	1977	2155
250S - 54	0.0566	0.0849	50	1435	2111	2212	2560	2159	2753	2842	3149	1106	1349	1385	1510	2393	2917	2995	3266
250S - 68	0.0713	0.1069	33	1416	2047	2141	2467	2185	2740	2823	3109	1174	1409	1444	1566	2539	3048	3124	3387
250S - 68	0.0713	0.1069	50	2145	3102	3244	3737	3311	4152	4277	4711	1778	2135	2188	2373	3846	4618	4733	5132
350S - 18	0.0188	0.0843	33	123	195	206	243	156	216	225	256	55	72	75	84	110	145	151	169
350S - 27	0.0283	0.0796	33	267	412	433	508	362	487	505	570	146	187	193	214	306	391	404	448
350S - 30	0.0312	0.0781	33	320	491	516	604	442	589	611	688	183	233	240	266	386	490	506	560
350S - 33	0.0346	0.0764	33	388	591	621	726	545	721	748	839	232	292	301	333	492	621	640	706
350S - 43	0.0451	0.0712	33	636	951	997	1160	931	1207	1248	1391	419	519	534	585	904	1119	1151	1263
350S - 54	0.0566	0.0849	33	946	1392	1458	1688	1423	1815	1873	2075	680	829	852	929	1471	1794	1842	2008
350S - 54	0.0566	0.0849	50	1434	2109	2209	2557	2156	2750	2838	3144	1031	1257	1290	1407	2229	2718	2791	3043
350S - 68	0.0713	0.1069	33	1414	2045	2138	2464	2183	2737	2819	3106	1104	1326	1359	1473	2388	2867	2939	3186
350S - 68	0.0713	0.1069	50	2143	3098	3240	3733	3307	4147	4272	4706	1673	2009	2059	2232	3618	4345	4452	4827
350S - 97	0.1017	0.1525	33	2641	3716	3876	4431	4235	5181	5321	5809	2305	2708	2768	2976	4986	5857	5986	6435
350S - 97	0.1017	0.1525	50	4002	5631	5873	6713	6416	7850	8062	8802	3493	4103	4194	4508	7555	8874	9070	9751
362S - 18	0.0188	0.0843	33	123	195	206	243	155	216	225	256	53	70	73	82	108	142	147	165
362S - 27	0.0283	0.0796	33	266	411	433	508	362	487	505	570	144	184	190	211	301	386	398	442
362S - 30	0.0312	0.0781	33	320	491	516	604	442	589	611	687	181	230	237	262	381	484	499	553
362S - 33	0.0346	0.0764	33	388	591	621	726	545	721	747	839	229	289	298	329	486	613	632	698
362S - 43	0.0451	0.0712	33	636	950	997	1160	930	1207	1248	1391	415	514	528	579	895	1109	1140	1250
362S - 54	0.0566	0.0849	33	946	1391	1458	1687	1423	1815	1873	2075	675	823	845	921	1459	1779	1826	1992
362S - 54	0.0566	0.0849	50	1433	2108	2208	2557	2156	2750	2838	3144	1022	1246	1280	1395	2211	2695	2767	3017
362S - 68	0.0713	0.1069	33	1414	2045	2138	2463	2182	2737	2819	3105	1096	1316	1349	1463	2371	2847	2918	3163
362S - 68	0.0713	0.1069	50	2143	3098	3239	3732	3307	4147	4271	4705	1661	1995	2044	2216	3592	4314	4421	4793
362S - 97	0.1017	0.1525	33	2641	3716	3875	4430	4234	5180	5320	5809	2292	2693	2752	2959	4957	5823	5952	6399
362S - 97	0.1017	0.1525	50	4001	5630	5872	6713	6416	7849	8061	8801	3473	4080	4170	4483	7511	8823	9018	9695
400S - 27	0.0283	0.0796	33	266	411	433	507	362	486	505	569	138	177	182	202	289	370	382	424
400S - 30	0.0312	0.0781	33	320	490	516	604	441	589	611	687	174	221	228	252	366	465	480	531
400S - 33	0.0346	0.0764	33	388	591	621	726	545	721	747	838	221	279	287	317	469	592	610	673
400S - 43	0.0451	0.0712	33	635	950	997	1159	930	1206	1247	1390	403	499	513	563	870	1077	1108	1215
400S - 54	0.0566	0.0849	33	946	1391	1457	1687	1422	1814	1872	2074	658	803	824	899	1424	1736	1782	1943
400S - 54	0.0566	0.0849	50	1433	2107	2207	2556	2155	2748	2836	3143	998	1216	1249	1361	2157	2630	2700	2944
400S - 68	0.0713	0.1069	33	1414	2044	2137	2462	2181	2736	2818	3104	1074	1289	1321	1432	2322	2788	2857	3098
400S - 68	0.0713	0.1069	50	2142	3097	3238	3731	3305	4145	4270	4703	1627	1953	2002	2170	3518	4224	4329	4694
400S - 97	0.1017	0.1525	33	2640	3715	3874	4429	4233	5178	5319	5807	2254	2648	2706	2909	4875	5726	5853	6292
400S - 97	0.1017	0.1525	50	4000	5628	5870	6711	6414	7846	8059	8798	3415	4012	4100	4408	7386	8676	8868	9534
550S - 27	0.0283	0.0796	33	266	410	432	506	361	485	504	568	116	149	154	171	244	312	322	357
550S - 30	0.0312	0.0781	33	319	489	515	603	441	588	610	686	149	189	195	216	314	399	411	455
550S - 33	0.0346	0.0764	33	387	590	620	724	544	720	746	836	192	242	250	276	408	514	530	585
550S - 43	0.0451	0.0712																	

U-Channel Section Properties

Section	Design Thickness (in)	Yield Strength, Fy (ksi)	Gross Properties						Effective Properties			
			Area (in ²)	Weight (lb/ft)	Ix (in ⁴)	Rx (in)	Iy (in ⁴)	Ry (in)	Ix (in ⁴)	Sx (in ³)	Ma (in-k)	Va (lb)
075U050-54	0.0566	33	0.087	0.296	0.007	0.289	0.002	0.156	0.007	0.019	0.459	327
150U050-54	0.0566	33	0.130	0.441	0.039	0.549	0.003	0.146	0.039	0.052	1.230	852
200U050-54	0.0566	33	0.158	0.537	0.080	0.711	0.003	0.137	0.080	0.080	1.883	1203
250U050-54	0.0566	33	0.186	0.633	0.140	0.868	0.003	0.130	0.140	0.112	2.648	1553

1. Calculated properties are based on AISI S100-16/S1-18, North American Specification for Design of Cold-Formed Steel Structural Members with Supplement 1.
2. Minimum base metal thickness is 95% of design thickness.
3. Effective properties are based on Fy=33ksi.

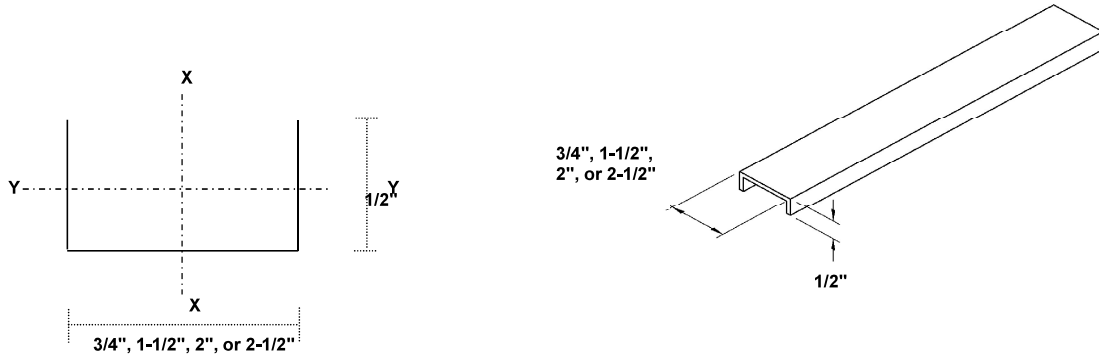

U-Channel Allowable Ceiling Spans L/360

Section	Spans	4 psf Channel Spacing (in) o.c.					6 psf Channel Spacing (in) o.c.					13 psf Channel Spacing (in) o.c.					15 psf Channel Spacing (in) o.c.				
		24	36	48	60	72	24	36	48	60	72	24	36	48	60	72	24	36	48	60	72
075U050-54	Single	3' 5"	3' 0"	2' 9"	2' 6"	2' 4"	3' 0"	2' 7"	2' 4"	2' 2"	2' 1"	2' 4"	2' 0"	1' 10"	1' 8"	1' 7"	2' 2"	1' 11"	1' 9"	1' 7"	1' 6"
	Multiple	4' 2"	3' 8"	3' 4"	3' 1"	2' 11"	3' 8"	3' 2"	2' 11"	2' 8"	2' 7"	2' 10"	2' 6"	2' 3"	2' 1"	1' 11"	2' 8"	2' 4"	2' 2"	2' 0"	1' 9"
150U050-54	Single	5' 6"	4' 10"	4' 5"	4' 1"	3' 10"	4' 10"	4' 3"	3' 10"	3' 7"	3' 5"	3' 9"	3' 4"	3' 0"	2' 9"	2' 7"	3' 7"	3' 2"	2' 10"	2' 7"	2' 5"
	Multiple	7' 1"	6' 2"	5' 8"	5' 3"	4' 11"	6' 2"	5' 5"	4' 11"	4' 7"	4' 4"	4' 10"	4' 2"	3' 9"	3' 4"	3' 0"	4' 7"	4' 0"	3' 6"	3' 1"	2' 9"
200U050-54	Single	5' 10"	5' 1"	4' 8"	4' 4"	4' 1"	5' 1"	4' 6"	4' 1"	3' 10"	3' 7"	4' 0"	3' 6"	3' 2"	3' 0"	2' 10"	3' 10"	3' 4"	3' 1"	2' 10"	2' 8"
	Multiple	7' 5"	6' 6"	5' 11"	5' 6"	5' 2"	6' 6"	5' 8"	5' 2"	4' 10"	4' 7"	5' 1"	4' 5"	4' 0"	3' 9"	3' 6"	4' 10"	4' 3"	3' 10"	3' 7"	3' 2"
250U050-54	Single	6' 1"	5' 4"	4' 10"	4' 6"	4' 3"	5' 4"	4' 8"	4' 3"	4' 0"	3' 9"	4' 2"	3' 8"	3' 4"	3' 1"	2' 11"	4' 0"	3' 6"	3' 2"	3' 0"	2' 10"
	Multiple	7' 9"	6' 9"	6' 2"	5' 9"	5' 5"	6' 9"	5' 11"	5' 5"	5' 0"	4' 9"	5' 3"	4' 7"	4' 3"	3' 11"	3' 9"	5' 0"	4' 5"	4' 0"	3' 9"	3' 7"

U-Channel Allowable Ceiling Spans L/240

Section	Spans	4 psf Channel Spacing (in) o.c.					6 psf Channel Spacing (in) o.c.					13 psf Channel Spacing (in) o.c.					15 psf Channel Spacing (in) o.c.				
		24	36	48	60	72	24	36	48	60	72	24	36	48	60	72	24	36	48	60	72
075U050-54	Single	3' 11"	3' 5"	3' 1"	2' 11"	2' 9"	3' 5"	3' 0"	2' 9"	2' 6"	2' 4"	2' 8"	2' 4"	2' 1"	1' 11"	1' 9"	2' 6"	2' 2"	2' 0"	1' 10"	1' 8"
	Multiple	4' 10"	4' 2"	3' 10"	3' 7"	3' 4"	4' 2"	3' 8"	3' 4"	3' 1"	2' 10"	3' 3"	2' 9"	2' 4"	2' 1"	1' 11"	3' 1"	2' 7"	2' 2"	2' 0"	1' 9"
150U050-54	Single	5' 6"	4' 10"	4' 5"	4' 1"	3' 10"	4' 10"	4' 3"	3' 10"	3' 7"	3' 5"	3' 9"	3' 4"	3' 0"	2' 9"	2' 7"	3' 7"	3' 2"	2' 10"	2' 7"	2' 5"
	Multiple	7' 1"	6' 2"	5' 8"	5' 3"	4' 11"	6' 2"	5' 5"	4' 11"	4' 7"	4' 4"	4' 10"	4' 2"	3' 9"	3' 4"	3' 0"	4' 7"	4' 0"	3' 6"	3' 1"	2' 9"
200U050-54	Single	5' 10"	5' 1"	4' 8"	4' 4"	4' 1"	5' 1"	4' 6"	4' 1"	3' 10"	3' 7"	4' 0"	3' 6"	3' 2"	3' 0"	2' 10"	3' 10"	3' 4"	3' 1"	2' 10"	2' 8"
	Multiple	7' 5"	6' 6"	5' 11"	5' 6"	5' 2"	6' 6"	5' 8"	5' 2"	4' 10"	4' 7"	5' 1"	4' 5"	4' 0"	3' 9"	3' 6"	4' 10"	4' 3"	3' 10"	3' 7"	3' 2"
250U050-54	Single	6' 1"	5' 4"	4' 10"	4' 6"	4' 3"	5' 4"	4' 8"	4' 3"	4' 0"	3' 9"	4' 2"	3' 8"	3' 4"	3' 1"	2' 11"	4' 0"	3' 6"	3' 2"	3' 0"	2' 10"
	Multiple	7' 9"	6' 9"	6' 2"	5' 9"	5' 5"	6' 9"	5' 11"	5' 5"	5' 0"	4' 9"	5' 3"	4' 7"	4' 3"	3' 11"	3' 9"	5' 0"	4' 5"	4' 0"	3' 9"	3' 7"

U-Channel Allowable Ceiling Spans L/120


Section	Spans	4 psf Channel Spacing (in) o.c.					6 psf Channel Spacing (in) o.c.					13 psf Channel Spacing (in) o.c.					15 psf Channel Spacing (in) o.c.				
		24	36	48	60	72	24	36	48	60	72	24	36	48	60	72	24	36	48	60	72
075U050-54	Single	4' 10"	4' 1"	3' 7"	3' 3"	3' 0"	4' 1"	3' 5"	3' 0"	2' 9"	2' 6"	2' 11"	2' 5"	2' 2"	1' 11"	1' 9"	2' 9"	2' 4"	2' 0"	1' 10"	1' 8"
	Multiple	5' 5"	4' 6"	4' 2"	3' 10"	3' 5"	4' 6"	3' 11"	3' 5"	3' 2"	2' 11"	3' 5"	2' 9"	2' 4"	2' 1"	1' 11"	3' 1"	2' 7"	2' 2"	2' 0"	1' 9"
150U050-54	Single	5' 6"	4' 10"	4' 5"	4' 1"	3' 10"	4' 10"	4' 3"	3' 10"	3' 7"	3' 5"	3' 9"	3' 4"	3' 0"	2' 9"	2' 7"	3' 7"	3' 2"	2' 10"	2' 7"	2' 5"
	Multiple	7' 1"	6' 2"	5' 8"	5' 3"	4' 11"	6' 2"	5' 5"	4' 11"	4' 7"	4' 4"	4' 10"	4' 2"	3' 9"	3' 4"	3' 0"	4' 7"	4' 0"	3' 6"	3' 1"	2' 9"
200U050-54	Single	5' 10"	5' 1"	4' 8"	4' 4"	4' 1"	5' 1"	4' 6"	4' 1"	3' 10"	3' 7"	4' 0"	3' 6"	3' 2"	3' 0"	2' 10"	3' 10"	3' 4"	3' 1"	2' 10"	2' 8"
	Multiple	7' 5"	6' 6"	5' 11"	5' 6"	5' 2"	6' 6"	5' 8"	5' 2"	4' 10"	4' 7"	5' 1"	4' 5"	4' 0"	3' 9"	3' 6"	4' 10"	4' 3"	3' 10"	3' 7"	3' 2"
250U050-54	Single	6' 1"	5' 4"	4' 10"	4' 6"	4' 3"	5' 4"	4' 8"	4' 3"	4' 0"	3' 9"	4' 2"	3' 8"	3' 4"	3' 1"	2' 11"	4' 0"	3' 6"	3' 2"	3' 0"	2' 10"
	Multiple	7' 9"	6' 9"	6' 2"	5' 9"	5' 5"	6' 9"	5' 11"	5' 5"	5' 0"	4' 9"	5' 3"	4' 7"	4' 3"	3' 11"	3' 9"	5' 0"	4' 5"	4' 0"	3' 9"	3' 7"

1. Allowable ceiling spans are based on effective properties.
2. Multiple span indicates two or more equal spans with channel continuous over center support.
3. Bearing length = 0.75-inches.
4. Table values are based on the compression flange laterally unsupported.

(Hat) Furring (F) Channel Section Properties

Section	Design Thickness (in)	Yield Strength, F_y (ksi)	Gross Properties						Effective Properties			
			Area (in ²)	Weight (lb/ft)	I_x (in ⁴)	R_x (in)	I_y (in ⁴)	R_y (in)	I_x (in ⁴)	S_x (in ³)	M_a (ft-lb)	V_a (lb)
087F125-18	0.0188	33	0.072	0.244	0.009	0.354	0.035	0.698	0.008	0.016	26.61	255
087F125-27	0.0283	33	0.107	0.365	0.013	0.351	0.051	0.693	0.013	0.027	45.20	381
087F125-30	0.0312	33	0.118	0.401	0.014	0.350	0.056	0.691	0.014	0.031	50.98	420
087F125-33	0.0346	33	0.130	0.443	0.016	0.349	0.062	0.689	0.016	0.034	56.23	464
087F125-43	0.0451	33	0.168	0.572	0.020	0.345	0.079	0.684	0.020	0.043	71.00	599
150F125-18	0.0188	33	0.095	0.324	0.031	0.572	0.052	0.742	0.029	0.034	56.73	261
150F125-27	0.0283	33	0.143	0.485	0.046	0.569	0.077	0.737	0.046	0.057	94.22	390
150F125-30	0.0312	33	0.157	0.534	0.051	0.568	0.085	0.735	0.050	0.064	105.92	429
150F125-33	0.0346	33	0.174	0.590	0.056	0.566	0.093	0.733	0.056	0.071	117.31	474
150F125-43	0.0451	33	0.225	0.764	0.071	0.563	0.119	0.728	0.071	0.091	149.70	613

1. Calculated properties are based on AISI S100-16/S1-18, North American Specification for Design of Cold-Formed Steel Structural Members with Supplement 1.
2. Minimum base metal thickness is 95% of design thickness. Design thickness used for determination of properties.
3. Effective properties are based on $F_y=33$ ksi. For deflection calculations, use effective I_x . Effective I_x is based on Procedure 1 of NASPEC.
4. Effective properties are given as the minimum value for positive or negative bending.

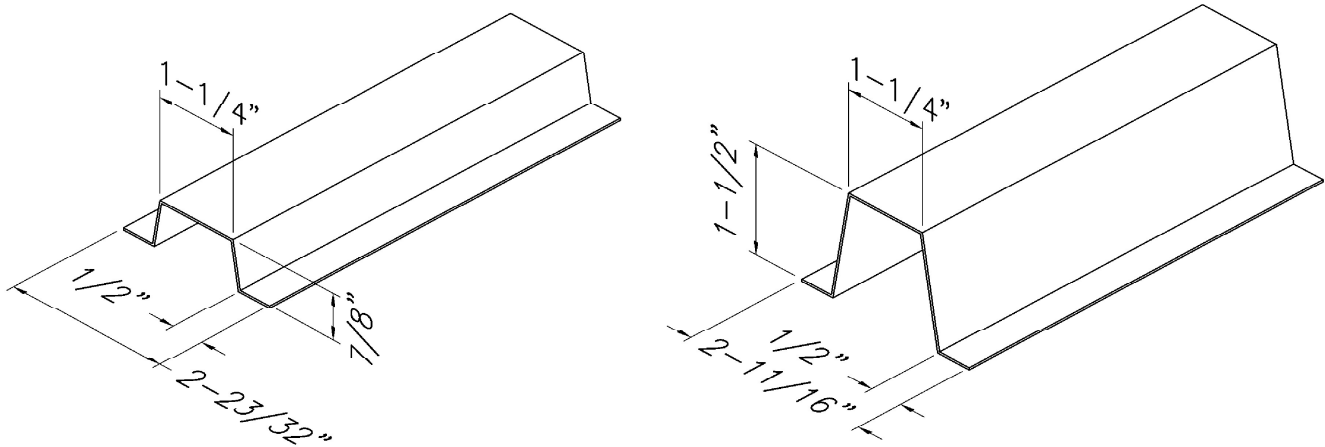

(Hat) Furring (F) Channel Allowable Ceiling Spans L/360

Section	Yield Strength, F_y (ksi)	Spans	4 psf Spacing (in) o.c.			6 psf Spacing (in) o.c.			13 psf Spacing (in) o.c.		
			12	16	24	12	16	24	12	16	24
087F125-18	33	Single	4' 5"	4' 0"	3' 6"	3' 10"	3' 6"	3' 1"	3' 0"	2' 9"	2' 5"
		Multiple	5' 6"	5' 0"	4' 4"	4' 9"	4' 4"	3' 10"	3' 8"	3' 4"	2' 10"
087F125-27	33	Single	5' 3"	4' 9"	4' 2"	4' 7"	4' 2"	3' 8"	3' 6"	3' 3"	2' 10"
		Multiple	6' 6"	5' 11"	5' 2"	5' 8"	5' 2"	4' 6"	4' 4"	4' 0"	3' 6"
087F125-30	33	Single	5' 5"	4' 11"	4' 3"	4' 9"	4' 3"	3' 9"	3' 8"	3' 4"	2' 11"
		Multiple	6' 8"	6' 1"	5' 3"	5' 10"	5' 3"	4' 7"	4' 6"	4' 1"	3' 7"
087F125-33	33	Single	5' 7"	5' 1"	4' 5"	4' 10"	4' 5"	3' 10"	3' 9"	3' 5"	3' 0"
		Multiple	6' 11"	6' 3"	5' 6"	6' 0"	5' 6"	4' 9"	4' 8"	4' 3"	3' 8"
087F125-43	33	Single	6' 0"	5' 6"	4' 9"	5' 3"	4' 9"	4' 2"	4' 1"	3' 8"	3' 3"
		Multiple	7' 5"	6' 9"	5' 11"	6' 6"	5' 11"	5' 2"	5' 0"	4' 7"	4' 0"
150F125-18	33	Single	6' 10"	6' 2"	5' 5"	5' 11"	5' 5"	4' 9"	4' 7"	4' 2"	3' 8"
		Multiple	8' 5"	7' 8"	6' 8"	7' 4"	6' 8"	5' 10"	5' 8"	4' 9"	3' 8"
150F125-27	33	Single	7' 11"	7' 3"	6' 4"	6' 11"	6' 4"	5' 6"	5' 4"	4' 11"	4' 3"
		Multiple	9' 10"	8' 11"	7' 10"	8' 7"	7' 10"	6' 10"	6' 8"	6' 0"	5' 3"
150F125-30	33	Single	8' 2"	7' 5"	6' 6"	7' 2"	6' 6"	5' 8"	5' 6"	5' 0"	4' 5"
		Multiple	10' 1"	9' 2"	8' 0"	8' 10"	8' 0"	7' 0"	6' 10"	6' 3"	5' 5"
150F125-33	33	Single	8' 6"	7' 8"	6' 9"	7' 5"	6' 9"	5' 10"	5' 9"	5' 2"	4' 6"
		Multiple	10' 6"	9' 6"	8' 4"	9' 2"	8' 4"	7' 3"	7' 1"	6' 5"	5' 7"
150F125-43	33	Single	9' 2"	8' 4"	7' 4"	8' 0"	7' 4"	6' 4"	6' 2"	5' 8"	4' 11"
		Multiple	11' 4"	10' 4"	9' 0"	9' 11"	9' 0"	7' 11"	7' 8"	7' 0"	6' 1"

1. Allowable ceiling spans are based on effective properties.
2. Multiple span indicates two or more equal spans with channel continuous over center support.
3. Bearing length = 0.75-inches.

(Hat) Furring (F) Channel Allowable Ceiling Spans L/240

Section	Yield Strength, Fy (ksi)	Spans	4 psf Spacing (in) o.c.			6 psf Spacing (in) o.c.			13 psf Spacing (in) o.c.		
			12	16	24	12	16	24	12	16	24
087F125-18	33	Single	5' 1"	4' 7"	4' 0"	4' 5"	4' 0"	3' 6"	3' 5"	3' 1"	2' 9"
		Multiple	6' 3"	5' 8"	5' 0"	5' 6"	5' 0"	4' 3"	4' 1"	3' 6"	2' 10"
087F125-27	33	Single	6' 0"	5' 5"	4' 9"	5' 3"	4' 9"	4' 2"	4' 1"	3' 8"	3' 3"
		Multiple	7' 5"	6' 9"	5' 11"	6' 6"	5' 11"	5' 2"	5' 0"	4' 7"	3' 9"
087F125-30	33	Single	6' 2"	5' 7"	4' 11"	5' 5"	4' 11"	4' 3"	4' 2"	3' 9"	3' 4"
		Multiple	7' 8"	6' 11"	6' 1"	6' 8"	6' 1"	5' 3"	5' 2"	4' 8"	4' 0"
087F125-33	33	Single	6' 5"	5' 10"	5' 1"	5' 7"	5' 1"	4' 5"	4' 4"	3' 11"	3' 5"
		Multiple	7' 11"	7' 2"	6' 3"	6' 11"	6' 3"	5' 6"	5' 4"	4' 10"	4' 2"
087F125-43	33	Single	6' 11"	6' 3"	5' 6"	6' 0"	5' 6"	4' 9"	4' 8"	4' 3"	3' 8"
		Multiple	8' 6"	7' 9"	6' 9"	7' 5"	6' 9"	5' 11"	5' 9"	5' 3"	4' 7"
150F125-18	33	Single	7' 10"	7' 1"	6' 2"	6' 10"	6' 2"	5' 5"	5' 3"	4' 9"	4' 2"
		Multiple	9' 8"	8' 9"	7' 6"	8' 5"	7' 6"	6' 2"	5' 10"	4' 9"	3' 8"
150F125-27	33	Single	9' 1"	8' 3"	7' 3"	7' 11"	7' 3"	6' 4"	6' 2"	5' 7"	4' 11"
		Multiple	11' 3"	10' 3"	8' 11"	9' 10"	8' 11"	7' 10"	7' 7"	6' 7"	5' 5"
150F125-30	33	Single	9' 5"	8' 6"	7' 5"	8' 2"	7' 5"	6' 6"	6' 4"	5' 9"	5' 0"
		Multiple	11' 7"	10' 6"	9' 2"	10' 1"	9' 2"	8' 0"	7' 10"	7' 0"	5' 9"
150F125-33	33	Single	9' 8"	8' 10"	7' 8"	8' 6"	7' 8"	6' 9"	6' 7"	5' 11"	5' 2"
		Multiple	12' 0"	10' 11"	9' 6"	10' 6"	9' 6"	8' 4"	8' 1"	7' 4"	6' 0"
150F125-43	33	Single	10' 6"	9' 7"	8' 4"	9' 2"	8' 4"	7' 4"	7' 1"	6' 5"	5' 8"
		Multiple	13' 0"	11' 10"	10' 4"	11' 4"	10' 4"	9' 0"	8' 9"	8' 0"	6' 9"

(Hat) Furring (F) Channel Allowable Ceiling Spans L/120

Section	Yield Strength, Fy (ksi)	Spans	4 psf Spacing (in) o.c.			6 psf Spacing (in) o.c.			13 psf Spacing (in) o.c.		
			12	16	24	12	16	24	12	16	24
087F125-18	33	Single	6' 5"	5' 10"	5' 1"	5' 7"	5' 1"	4' 5"	4' 4"	3' 11"	3' 5"
		Multiple	7' 4"	6' 4"	5' 1"	5' 11"	5' 2"	4' 2"	4' 1"	3' 6"	2' 10"
087F125-27	33	Single	7' 7"	6' 10"	6' 0"	6' 7"	6' 0"	5' 3"	5' 1"	4' 8"	4' 1"
		Multiple	9' 4"	8' 3"	6' 8"	7' 9"	6' 9"	5' 5"	5' 3"	4' 7"	3' 8"
087F125-30	33	Single	7' 9"	7' 1"	6' 2"	6' 10"	6' 2"	5' 5"	5' 3"	4' 9"	4' 2"
		Multiple	9' 7"	8' 9"	7' 1"	8' 3"	7' 2"	5' 9"	5' 7"	4' 10"	3' 11"
087F125-33	33	Single	8' 0"	7' 4"	6' 5"	7' 0"	6' 5"	5' 7"	5' 5"	4' 11"	4' 4"
		Multiple	9' 11"	9' 0"	7' 5"	8' 8"	7' 6"	6' 1"	5' 11"	5' 1"	4' 1"
087F125-43	33	Single	8' 8"	7' 11"	6' 11"	7' 7"	6' 11"	6' 0"	5' 10"	5' 4"	4' 8"
		Multiple	10' 9"	9' 9"	8' 5"	9' 5"	8' 5"	6' 10"	6' 7"	5' 9"	4' 8"
150F125-18	33	Single	9' 10"	8' 11"	7' 10"	8' 7"	7' 10"	6' 10"	6' 8"	6' 0"	5' 3"
		Multiple	10' 8"	9' 3"	7' 6"	8' 8"	7' 6"	6' 1"	5' 10"	4' 5"	2' 11"
150F125-27	33	Single	11' 6"	10' 5"	9' 1"	10' 0"	9' 1"	7' 11"	7' 9"	7' 0"	6' 2"
		Multiple	13' 9"	11' 11"	9' 8"	11' 2"	9' 8"	7' 11"	7' 7"	6' 7"	5' 4"
150F125-30	33	Single	11' 10"	10' 9"	9' 5"	10' 4"	9' 5"	8' 2"	8' 0"	7' 3"	6' 4"
		Multiple	14' 7"	12' 7"	9' 3"	11' 11"	10' 3"	8' 4"	8' 1"	7' 0"	5' 8"
150F125-33	33	Single	12' 3"	11' 1"	9' 8"	10' 8"	9' 8"	8' 6"	8' 3"	7' 6"	6' 7"
		Multiple	15' 1"	13' 3"	10' 9"	12' 6"	10' 10"	8' 10"	8' 6"	7' 4"	6' 0"
150F125-43	33	Single	13' 3"	12' 1"	10' 6"	11' 7"	10' 6"	9' 2"	8' 11"	8' 2"	7' 1"
		Multiple	16' 5"	14' 11"	12' 2"	14' 2"	12' 3"	9' 11"	9' 7"	8' 4"	6' 9"

1. Single spans taken as the minimum span based on moment, shear, web crippling or deflection.
2. Multiple span indicates two or more equal, continuous spans with span length measured support to support.
3. Multiple spans taken as minimum span based on moment, shear, web crippling, deflection combined bending and shear or combined bending and web crippling.
4. Web crippling values based on 1-inch bearing at end and interior supports.

Fasteners (Screws and Welds)

Screw Table Notes

1. Allowable screw connection capacities are based on section J4 of the AISI S100-16/S1-18.
2. When connecting materials of different steel thicknesses or tensile strengths, use the lowest values.
Tabulated values assume two sheets of equal thickness are connected.
3. Screw shear and tension capacities were developed using published screw manufacturer data and evaluation reports available at the time of publications.
4. A nominal shear stress of 42.85ksi and a nominal tension stress of 40.84ksi was used for calculations based on screw manufacturer data.
5. Screw capacities are based on Allowable Strength Design (ASD) and include safety factor of 3.0.
6. When multiple fasteners are used, screws are assumed to have a center-to-center spacing of at least 3 times the nominal diameter (d).
7. Screws are assumed to have a center-of-screw to edge-of-steel dimension of at least 1.5 times the nominal diameter (d) of the screw.
8. Tension capacity is based on the lesser of pullout capacity in sheet closest to screw tip, or pullover capacity for sheet closest to screw head (using head diameter).
9. Note that for all tension values calculated in screw table, pullover values have been reduced by 50% assuming eccentrically loaded connections that produce a non uniform pullover force of the fastener.
10. Screw capacities are governed by a conservative estimate of screw capacity, not by sheet steel failure.
11. For higher screw capacities, especially for screw strength, use specific screws from specific manufacturer. See manufacturer's data for specific allowable values and installation instructions.

Allowable Screw Connection Capacity (Pounds per Screw)

Thickness (Mils)	Yield Strength, Fy (ksi)	Tensile Strength, Fu (ksi)	# 6 Screw (0.138" Dia, 1/4" Head)		# 8 Screw (0.164" Dia, 5/16" Head)		# 10 Screw (0.190" Dia, 0.340" Head)		# 12 Screw (0.216" Dia, 0.340" Head)		1/4" Screw (0.250" Dia, 0.409" Head)	
			Shear	Tension	Shear	Tension	Shear	Tension	Shear	Tension	Shear	Tension
18	33	33	44	24	48	29	52	33	55	38	60	44
27	33	33	82	37	89	43	96	50	102	57	110	66
30	33	33	95	40	103	48	111	55	118	63	127	73
33	33	45	151	61	164	72	177	84	188	95	203	110
43	33	45	214	79	244	94	263	109	280	124	302	144
54	33	45	214	100	303	118	370	137	394	156	424	180
54	50	65	214	123	303	171	406	198	525	225	613	261
68	33	45	214	123	303	149	406	173	525	196	600	227
68	50	65	214	123	303	173	406	232	525	284	704	328
97	33	45	214	123	303	173	406	232	525	280	704	324
97	50	65	214	123	303	173	406	232	525	300	704	403
118	33	45	214	123	303	173	406	232	525	300	704	396
118	50	65	214	123	303	173	406	232	525	300	704	403

Weld Table Notes

1. Allowable weld capacities are based on section J2.4 (for fillet welds) and J2.5 (for flare groove welds) of the AISI S100-16/S1-18.
2. When connecting materials of different steel thicknesses or tensile strengths, use the lowest values.
3. Weld capacities are based on Allowable Strength Design (ASD) and include appropriate safety factors.
4. Weld capacities are based on either 3/32" or 1/8" diameter E60 or E70 Electrodes. For thinner materials, 0.030" to 0.035" diameter wire electrodes may provide best results.
5. Parallel capacity is considered to be loading in the direction of the weld.
6. For flare groove welds, the effective throat of weld is conservatively assumed to be less than 2t.

Allowable Weld Capacity (Pounds) for 1-inch Long Welds

Thickness (Mils)	Design Thickness	Fy: Yield (ksi)	Fu: Tensile (ksi)	Fillet Welds		Flare Groove Welds	
				Parallel	Perpendicular	Parallel	Perpendicular
43	0.0451	33	45	619	864	544	663
54	0.0566	33	45	822	1084	682	832
54	0.0566	50	65	1188	1566	985	1202
68	0.0713	33	45	1082	1365	859	1048
68	0.0713	50	65	1563	1972	1241	1514
97	0.1017	33	45	1618	1947	1226	1495
97	0.1017	50	65	2337	2813	1771	2159
118	0.1242	33	45	Note-1	Note-1	Note-2	Note-2
118	0.1242	50	65	Note-1	Note-1	Note-2	Note-2

Note-1: For fillet welds, AISI S100 equation J2.5-7 must be checked for 118 mil material, or whenever the thickness of thinnest part is greater than 0.10-inch.

Note-2: For flare groove welds, AISI S100 equation J2.6-4 must be checked for 118 mil material, or whenever the thickness of thinnest part is greater than 0.10-inch.

BLOCKING NOTE:

PLACE SOLID BLOCKING AT ENDS OF FLOOR SYSTEM, ADJACENT TO ALL OPENINGS, AND AT 10'-0" o.c. MAX.

STRAP NOTE:

TOP STRAP NOT REQ'D. IF CONTINUOUSLY ATTACHED RIGID SHEATHING IS USED. TEMPORARY BRACING OF TOP FLANGE DURING CONSTRUCTION MAY BE REQ'D.

MIN. 18 GA RUNNER TRACK
SOLID BLOCKING @ 10'-0" o.c.
MAX. MAKE RUNNER TRACK 8" LONGER THAN JOIST INSIDE SPACING. CLIP FLANGES OF TRACK 4" FROM EACH END. BEND TRACK AT CLIPPED FLANGES.


ATTACH BLOCKING TO JOISTS w/(2)#10-16 SCREWS IN EACH FLANGE AS SHOWN.

(1)#10-16 SCREW IN EACH JOIST FLANGE

1-1/2" x 20 GA. STRAPPING ON TOP & BOTTOM OF JOISTS. (STRAPPING TO START, END, & SPLICE AT SOLID BLOCKING)

USE (8)#10-16 SCREW ON EACH SIDE OF BLOCKING.

TYP. FLOOR JOISTS

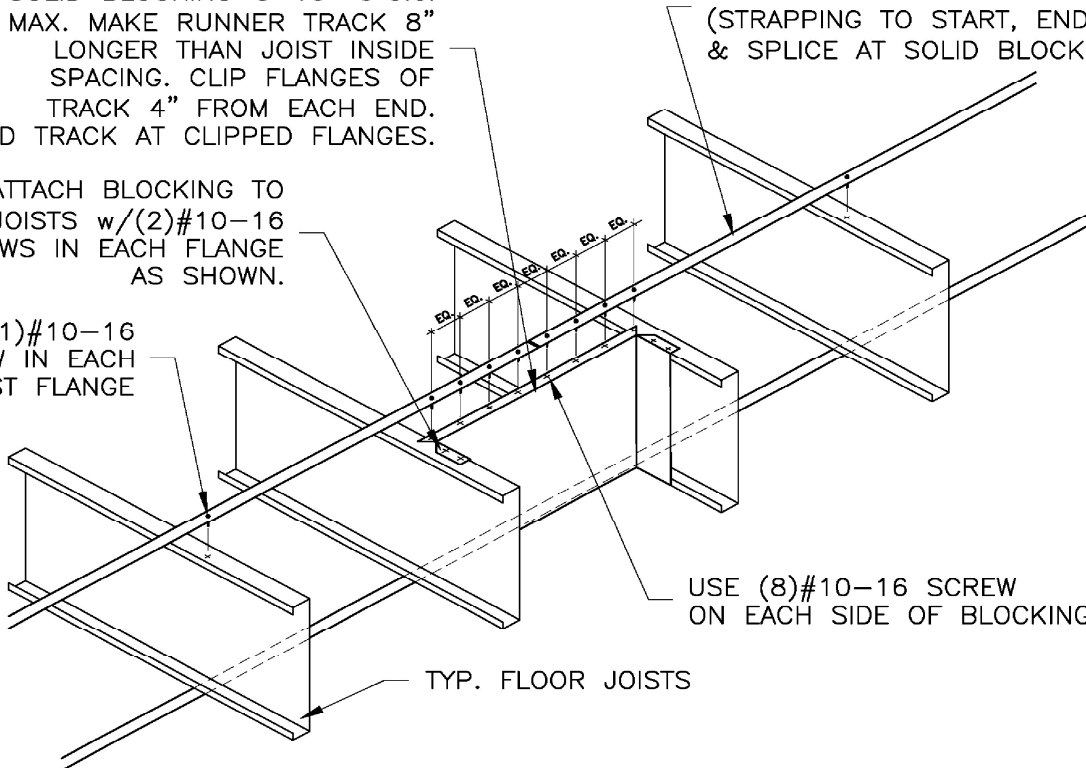

BRIDGING RECOMMENDATIONS	
SPANS	ROWS REQUIRED
UP TO 14'	ONE ROW @ MID-SPAN
14' TO 20'	TWO ROWS @ THIRD POINTS
20' TO 26'	THREE ROWS @ QUARTER POINTS

JOIST BRIDGING

1-1/2" x 20GA. STRAP WITH RUNNER TRACK BLOCKING


BLOCKING NOTE

PLACE SOLID BLOCKING AT ENDS OF WALL SYSTEM, ADJACENT TO ALL OPENINGS, AND AT 10'-0" O.C. MAX

1-1/2" x 20 GA. STRAPPING ON EACH SIDE OF WALL STUDS. (STRAPPING TO START, END, & SPLICE AT SOLID BLOCKING)

MIN. 18 GA RUNNER TRACK SOLID BLOCKING @ 10'-0" o.c. MAX. MAKE RUNNER TRACK 8" LONGER THAN STUD INSIDE SPACING. CLIP FLANGES OF TRACK 4" FROM EACH END. BEND TRACK AT CLIPPED FLANGES.

ATTACH BLOCKING TO WALL STUDS w/(2)#10-16 SCREWS IN EACH FLANGE AS SHOWN.

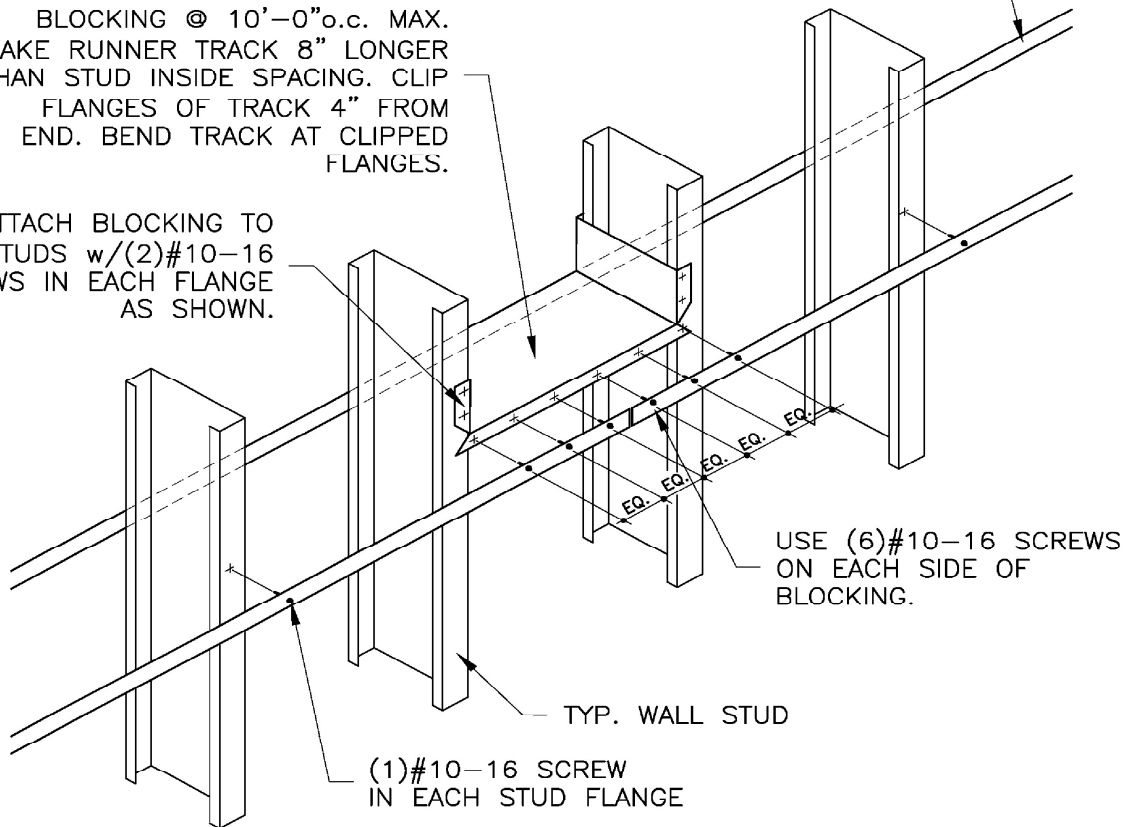

STRAPPING LATERAL BRACING

1-1/2" x 20GA. STRAP WITH RUNNER TRACK BLOCKING